
LANDSCAPING & TREE PLANTING SCHEME

A SILVER BIRCH (BETULA PENDULA) FEATHERED
B HAWTHORN (CRATAEGUS LAEVIGATA) FEATHERED
C WHITEBEAM (SORBUS ARIA) FEATHERED
D TURKISH HAZEL (CORYLUS COLURNA) FEATHERED


All planting to be in accordance with BS 4428:1989 and amendment No.1 (1991)

All trees to be planted with minimum 0.6m plastic mulch mat and to be staked, tied and tubed.

1/3 to ½ bag of peat free tree and shrub planting compost to be incorporated into backfill for each tree hole

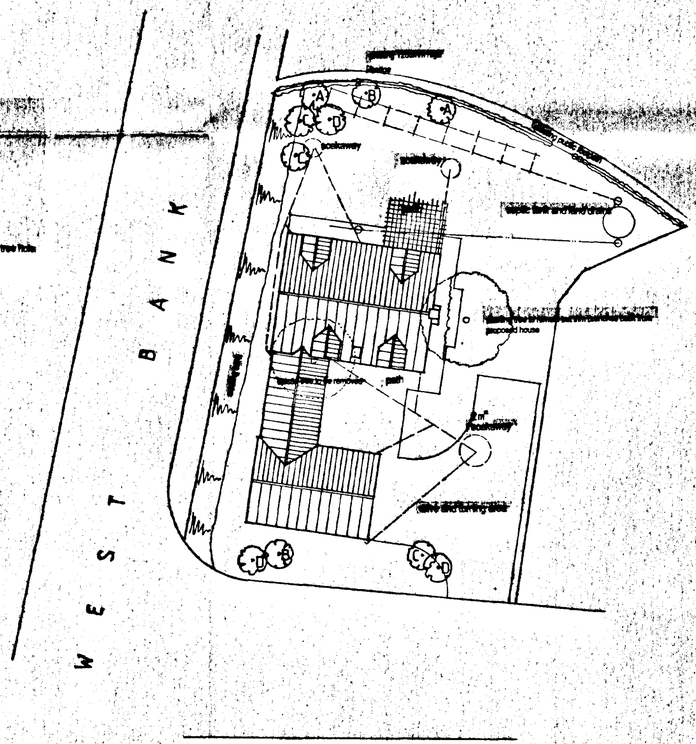

BLOCK PLAN

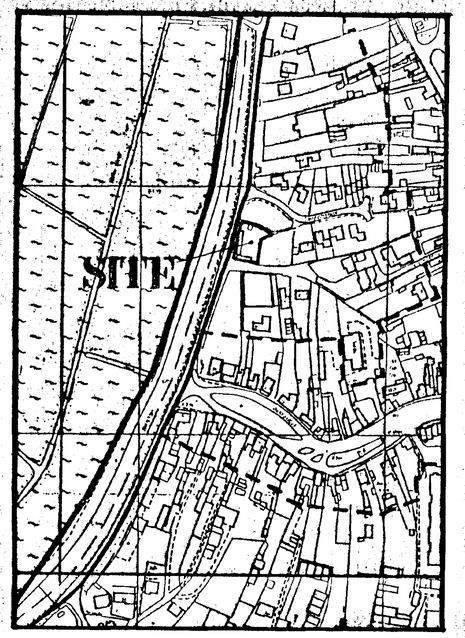

LOCATION PLAN

Septic tanks:-
Connect foul water drains to 680 gallon (3720 litre) for upto 4 people and 825 gallon (3750 litre) for upto 9 people Klargester type septic tank constructed in accordance with local authority requirements. The sub-irrigational drainage system to the septic tank is to be determined by percolation test in accordance with the provisions of clause 16.3.2. of BS6297 1983. The applicant is responsible for carrying out the tests and the minimum requirement is 30m2 of sub-irrigational drainage or such length as may be determined by the test, whichever is the greater. The council recommend that septic tanks, cesspools and settlement tanks be sited at a minimum distance of 12 metres from dwellings. Applicants are further advised that during times of inclement weather, the ground water level rises accordingly. It is essential that drainage fields to the septic tank are kept to the minimum say 1 in 80, and the tank percolany the bottle type, is modified by reducing its neck length by cutting to ensure that both inlet and outlet are maintained above ground water level. Environment Agency do not permit septic tank soakaway systems to be situated within 10 metres of any watercourse or to discharge effluent directly or indirectly into an aquifer.
Should the results of the percolation test prove to be unsatisfactory for septic tank drainage due to impervious soil conditions such as clay, then a cesspool of 18000 litres (4000 gallons) capacity, or mini-packaged treatment plant must be used.

SOUTH HOLLAND DC
HOUSING & PLANNING
21 MAR 2000
Ref: 0312/00

DETERMINED PLANS

G. R. MERCHANT
I.ENG AMICE, FIWO,
ARCHITECTURAL, STRUCTURAL
& LAND DRAINAGE CONSULTANT
TEL: HOLBEACH (01406) 490800

PROJECT:
4 BEDROOM HOUSE & DOUBLE GARAGE
OFF WEST BANK
CROWLAND

CLIENT:
ARBEN CONSTRUCTION

SCALES:	DATE:
1/200 1/1250	*JAN 2000*
	DRAWING No.: *AC-C.01*

REVISIONS:

DO NOT SCALE FROM THIS DRAWING
This drawing is copyright and may not be altered, traced, photographed or used for any purpose other than that for which it is issued.
The General Contractor is to check all dimensions on site and report discrepancies to the Architect.
All details shown on this drawing including foundations are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions which may be discovered during construction unless reported to the Architect so that design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken.

Summit DS (UK) 99962