CONDITION 9
DOORS & FRAMES




Technical information


For Liniar residential doors

Liniar


Vertical Cross Section - Inward opening*, internally beaded

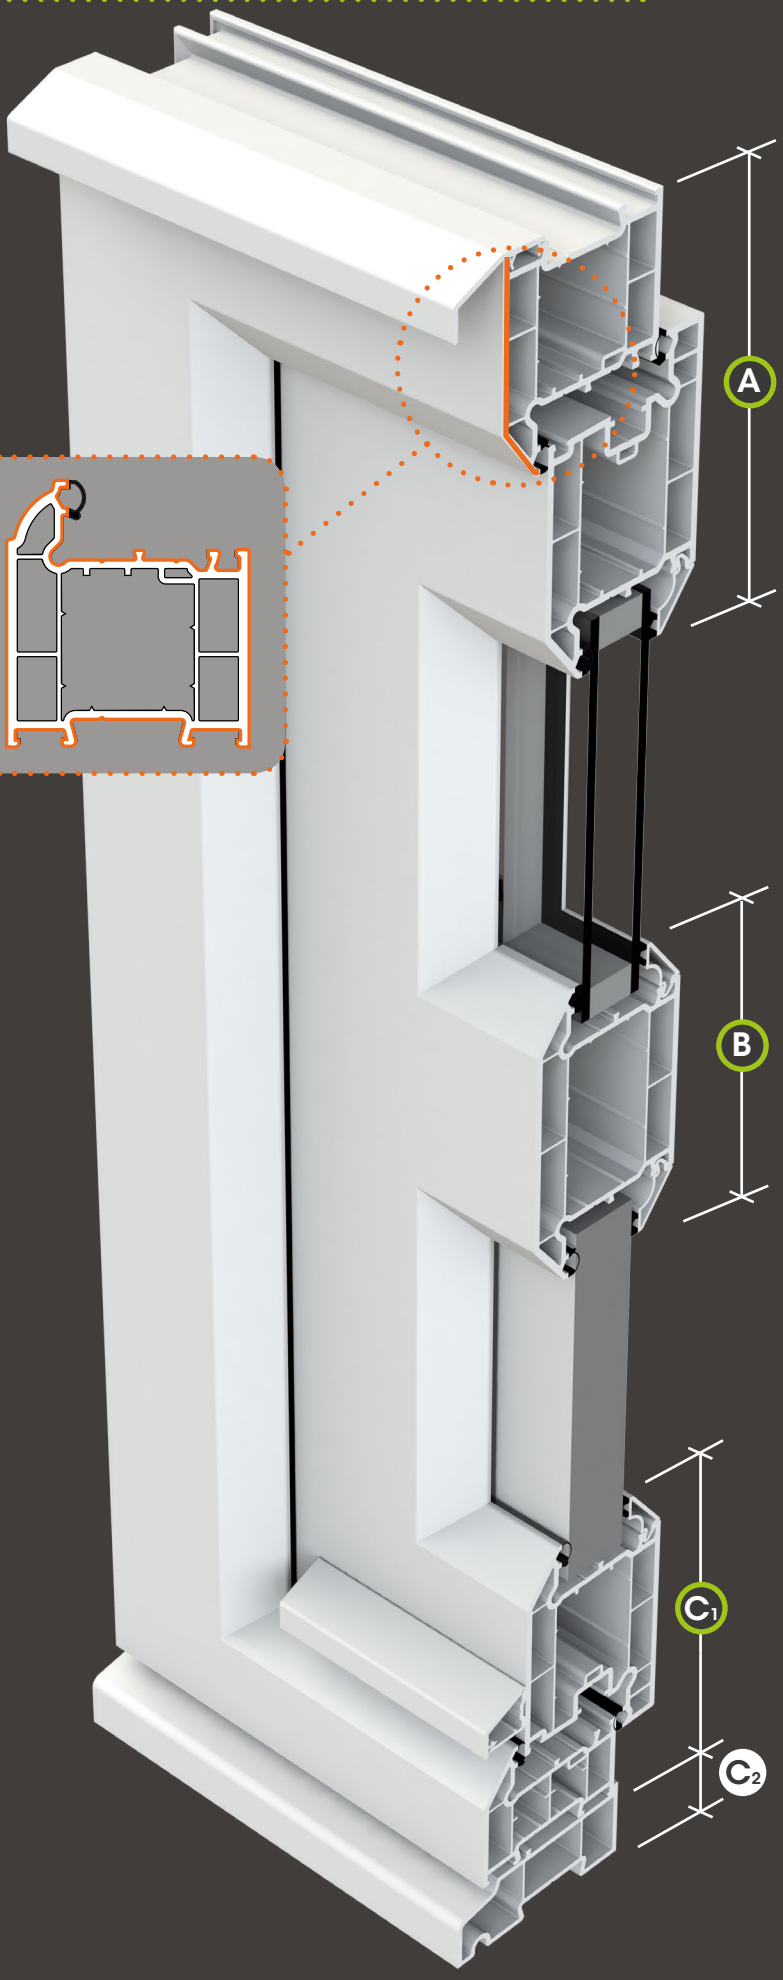


Optional sculptured profile

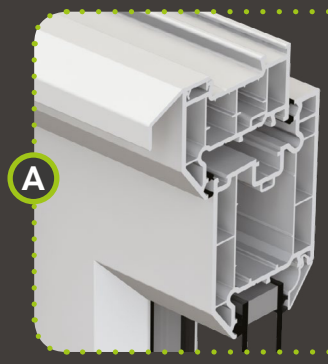


Optional small frame



Aluminium Threshold



Aluminium Threshold

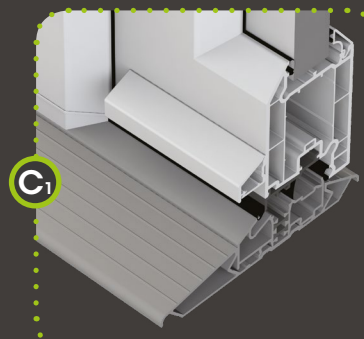

Threshold Tray

Part M

LAN275 threshold tray makes LAN272/LAN272T "Part M compliant" when fitted together

** outward opening options are also available and feature the same sightlines*

Residential Door

- Sculptured and chamfered suite
- 28mm double and 36mm/40mm triple glazing
- 4 and 6 multi-chamber EnergyPlus profiles
- U-values from 1.3 (DGU) and 1.0 (TGU)
- Patented co-ex gasket

Accreditations

PAS24 | BS EN 12608 | ISO 9001 | BS EN 6375

Colour Options

White or White Foil

Cream or Cream Foil

Chartwell Green

Irish Oak

Golden Oak

Rosewood

7016 Grey

Black

Additional colours are available to order as specials.
The colours shown in this brochure give an indication only.



Product	Dim. A
Small frame & sash L#W011 & LSW037*	136mm
Large frame & sash L#W016 & LSW037*	156mm

Product	Dim. B
Int. transom L#W026	87mm
Midrail L#W029	117mm


Product	Dim. C_1
Large frame & sash L#W016 & LSW037*	156mm
Small frame & sash L#W011 & LSW037*	136mm
Ali. threshold & sash LAN272/272T & LSW037*	127mm
Part M Ali. threshold & sash LAN271 & LSW037*	112mm

Product	Dim. C_2
85, 150, 165, 180 cills LSL085, LSL150, LCL165, LSL180	30mm

* SLCW037 for chamfered suite


Replace notation with (C) for Chamfered Suite or (S) for Sculptured

Residential Door Threshold Options

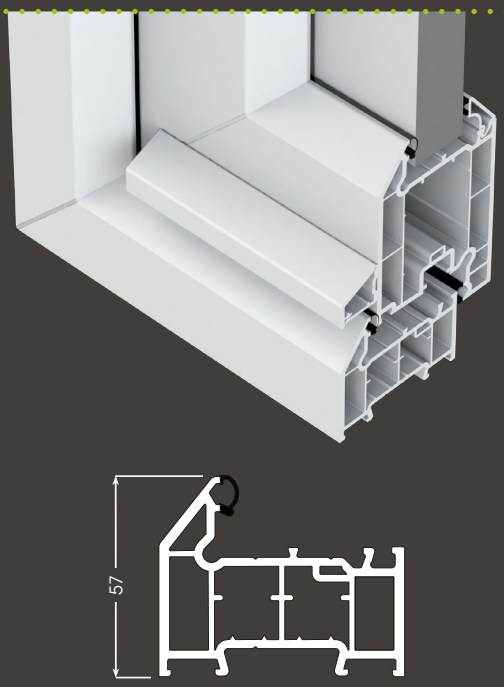

Frame Only

Threshold Height: 57mm

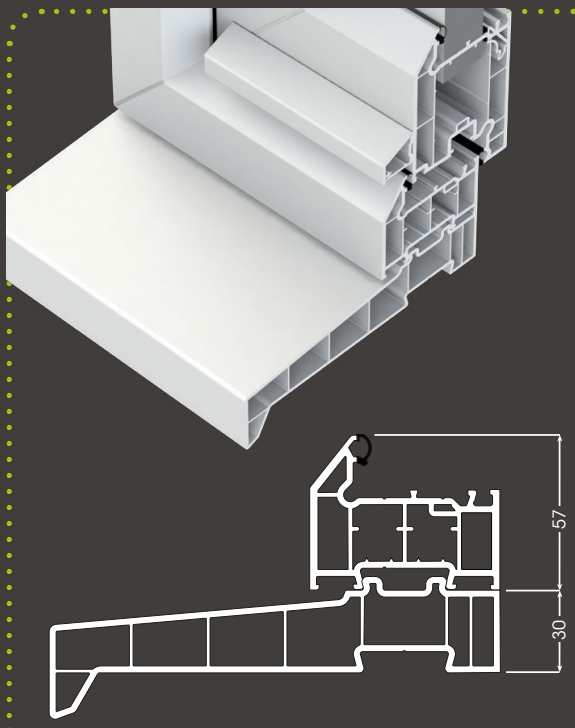


Frame and Cill

Threshold Height: 87mm (inc cill)



Part M Low Threshold


Threshold Height: 15mm

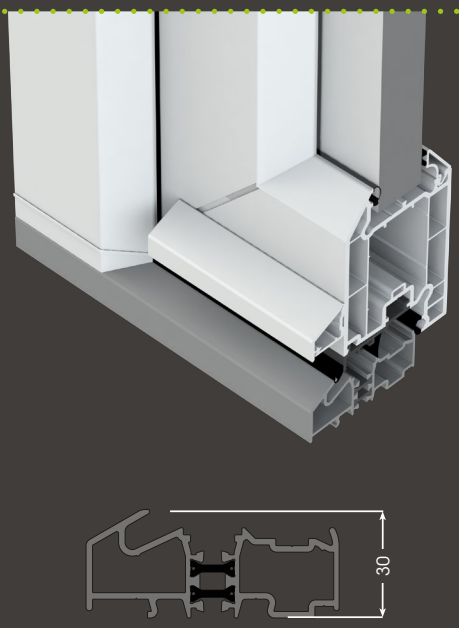


Low Threshold

Threshold Height: 30mm

Part M

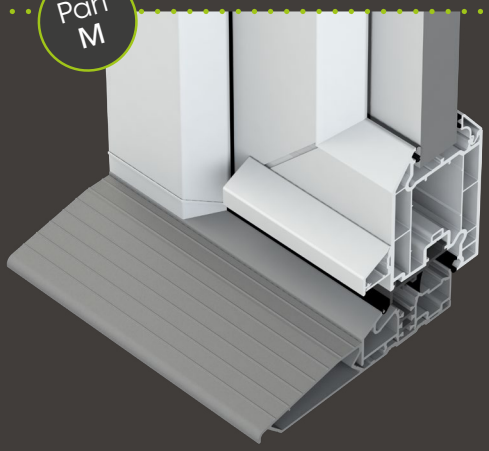


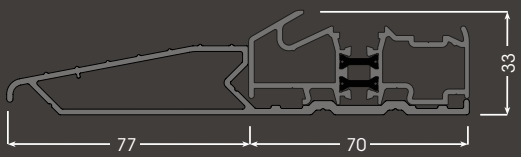


Low Threshold and Half Tray

Threshold Height: 33mm

Part M

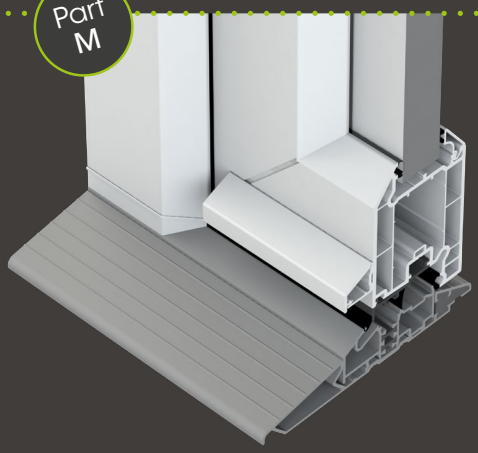

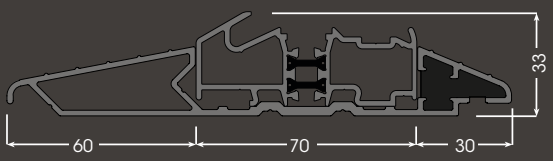


Low Threshold and Full Tray

Threshold Height: 33mm




Vertical Cross Section - Inward opening*, internally beaded

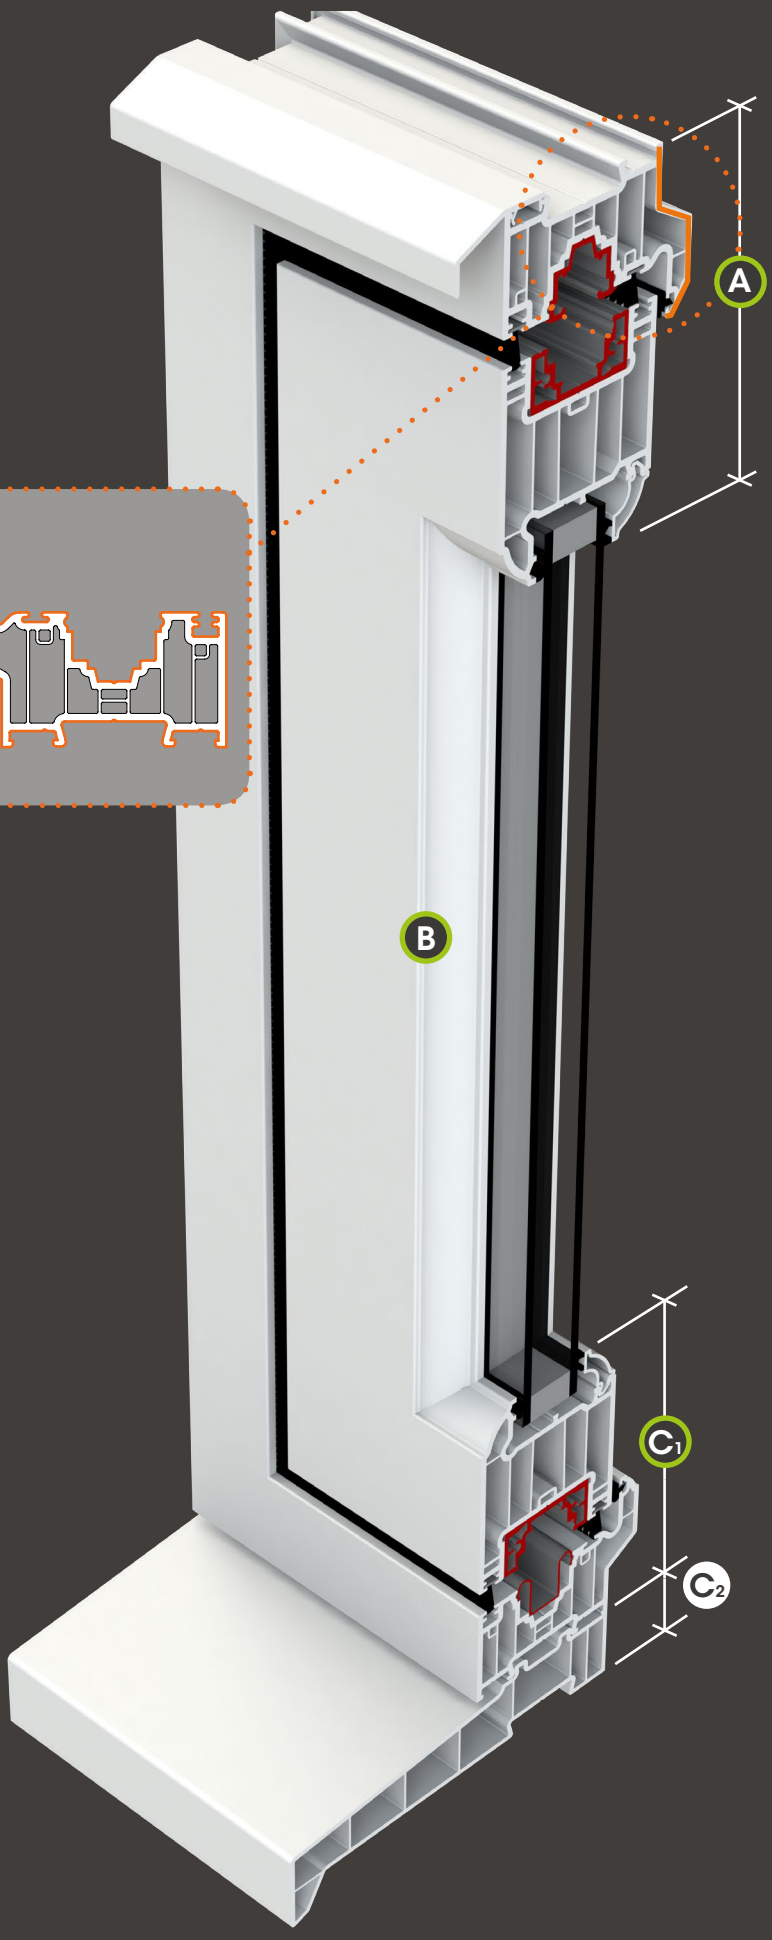


Optional chamfered profile


Optional add ons

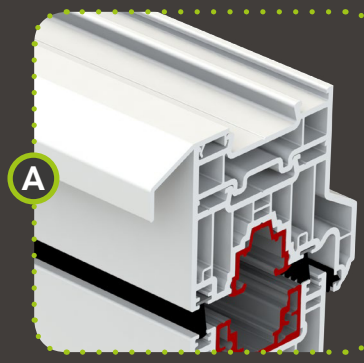


Optional midrail

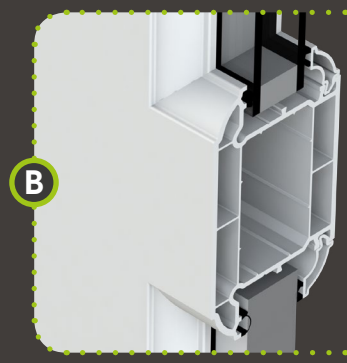

Aluminium Threshold



Threshold Tray

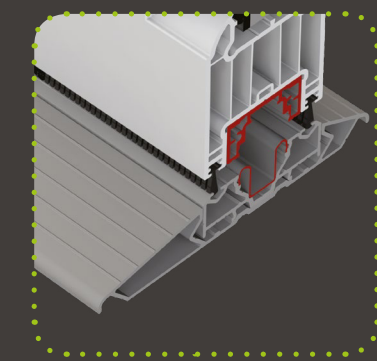

Part M

LAN275 threshold tray makes LAN272/LAN272T "Part M compliant" when fitted together

** outward opening options are also available and feature the same sightlines*

ModLok™ Residential/French Door

- Sculptured and Chamfered suites
- 28mm double and 36mm/40mm triple glazing
- Multi chambered EnergyPlus profiles
- U-values from 1.3 (DGU) and 1.0 (TGU)
- Patented aluminium exoskeleton

Accreditations

PAS24 | BS EN 12608 | ISO 9001 | BS EN 6375

Colour Options

White or White Foil

Cream or Cream Foil

Chartwell Green

Irish Oak

Golden Oak

Rosewood

7016 Grey

Black

Additional colours are available to order as specials.
The colours shown in this brochure give an indication only.



Product	Dim. A
Outer frame & sash MBF091 & MBF092	134mm
Outer frame, sash & 10mm add on MBF091, MBF092 & LAN116	144mm
Outer frame, sash & 20mm add on MBF091, MBF092 & LAN106	154mm
Outer frame, sash & 50mm add on MBF091, MBF092 & LAN126	184mm


Product	Dim. B
Int. transom LSW026	87mm
Midrail LSW029	117mm

Product	Dim. C_1
Outer frame & sash MBF091 & MBF092	134mm
Ali. threshold & sash MBF291T & MBF092	115.5mm

Product	Dim. C_2
85, 150, 165, 180 cills LSL085, LSL150, LCL165, LSL180	30mm


ModLok™ Residnetial/French Door Threshold Options






Frame Only

Threshold Height: 57mm

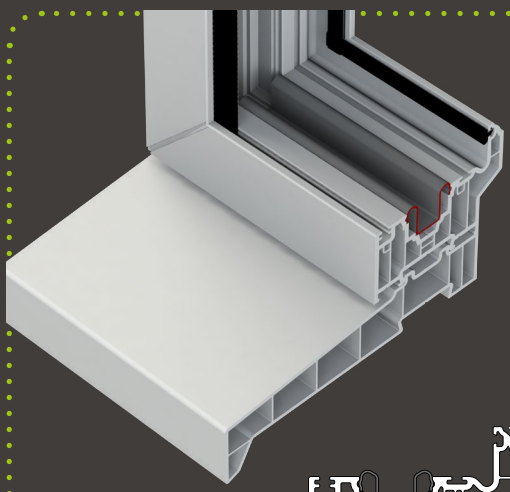

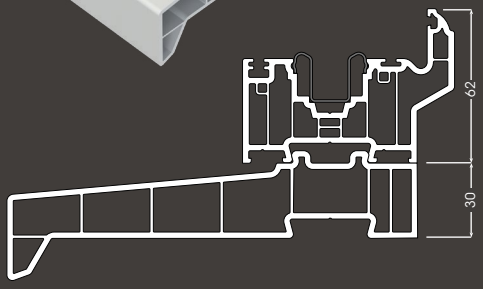


Frame and Cill

Threshold Height: 87mm (inc cill)


Part M






Part M Low Threshold

Threshold Height: 15mm

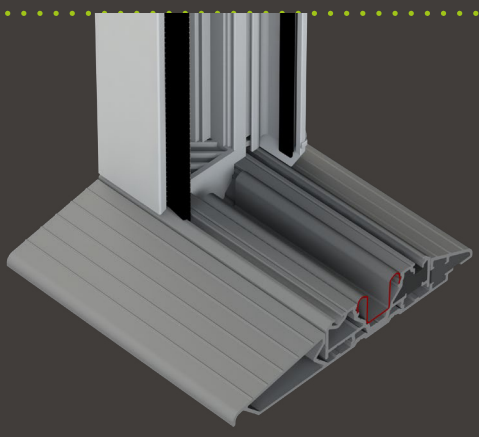


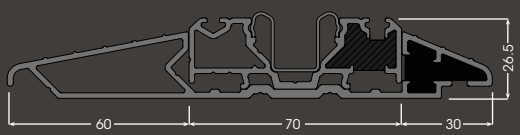

Low Threshold and Full Tray

Threshold Height: 26.5mm

Part M

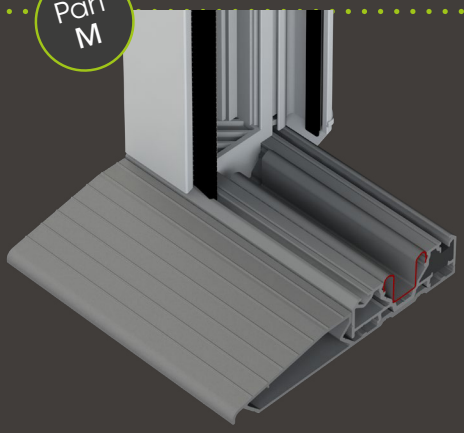



Low Threshold and Half Tray

Threshold Height: 26.5mm



Liniar specification guide

The Liniar Specification Guide is an A4-size, 234-page, full colour guide to specifying energy efficient PVCu windows and doors.

Covering the full range of lead-free Liniar products including residential doors, the Specification Guide includes full product charts, U-values, dimensions, accreditations, safety information and a variety of case studies.

To view an online copy of the Liniar Specification Guide and to order your free copy visit :

www.liniar.co.uk/specification-guide

Liniar
Flamstead House
Denby Hall Business Park
Denby
Derbyshire DE5 8JX

Tel: +44 (0)1332 883900
Fax: +44 (0)1332 883901
Email: sales@liniar.co.uk

www.liniar.co.uk