


Section AA
1:5

Section BB
1:5

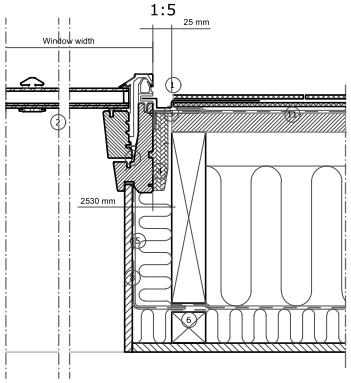

1. VELUX flashing (EDU 20°65°)
2. VELUX window (GCL 20°65°)
3. VELUX underfelt collar (BFX)
4. VELUX insulation frame (Preinstalled on GCL)
5. VELUX vapour barrier (BBX)
6. VELUX vapour barrier tape (BBX)
7. Gasket on BBX in window rebate
8. Lining (non VELUX)
9. Sarking board (Non VELUX)
10. Trimmer where necessary (Non VELUX)
11. Felt/breather membrane (Non VELUX)

Roof covering:

Slates
Max 2x8 mm

VELUX Products:

GCL
20°65°

EDU
20°65°

BFX

BBX

VELUX window sizes:

Size	Width (mm)
CC	550
FC	660
MC	780
PC	942
SC	1140

Size	Height (mm)
K04	978
K06	1178
K08	1398
K10	1600

© VELUX GROUP ® VELUX, VELUX logo are registered trademarks

File name: GCL + EDU DRAFT2

Drawing no.:		SCo:	
Create date: 16.12.22	Rev. date:	Format: A3	Scale: 1:5

Note: When installing VELUX Roof Windows, flashings and installation products,

CONSERVATION ROOFLIGHT DETAILS