New/Old Walling
Where new walling meets old provide proprietary flexible wall starters.

Roof Ventilation
At eaves provide proprietary ventilation equivalent to a 10 mm continuous gap along eaves.

En-suite Ventilation
Provide proprietary mechanical extract ventilation unit capable of extracting 15 l/sec. System to offer intermittent operation.

Heating System
Provide room thermostat or thermostatic radiator valves or similar approved to control the output from the heating system.

Insulated Pipes and Ducts
All pipes, which do not contribute to the heating of the building, will be insulated to BS5422 1977.

Safety Glazing
Provide safety glass to BS6206 to all windows to a minimum height of 800 mm above floor level plus doors to a minimum height of 1500 mm above floor level. Side screens to be same as doors if within 300 mm of doors.

Smoke Detection
Provide mains operated self-contained smoke alarms to BS5446 Part 1 in accordance with Approved Document B1.

Rainwater Goods
PVC rainwater goods 110 mm half round gutters and 68 mm diameter downpipes.

Wall Construction
275 mm cavity walls to consist of:
100 mm face brickwork (see site plan for details), 75 mm cavity to be filled with Crown Dritherm full fill insulation in accordance with BBA Certificate No. 87/1673 or similar approved, 100 mm internal skin of Tarmac Hemelite blockwork. Cavity walls tied together using galvanised iron or plastic twist ties spaced 900 mm horizontally and 450 mm vertically to BS1243, 1978. Internal blockwork walls to receive 10 mm sand/cement render and skim finish.

Habitable Room Trickle Ventilation
Provide proprietary trickle ventilators to head of windows giving a total opening area of not less than 8000 mm².

Foundations
As indicated on plan provide concrete strip foundations. To cavity walls provide 700 mm wide x 225 mm thick and to 100 mm walls provide 450 mm wide x 225 mm thick, unless noted otherwise. To non-load bearing internal walls thicken out ground floor oversite concrete to 450 mm wide x 200 mm thick. Where foundations at chimney breast accordingly and make 300 mm thick. Foundations to be taken down to an approved firm base, subject to local authority specifications. Concrete to be ST3 grade unless noted otherwise.

I.G. Type L1/S75 lintels to cavity walls and I.G. type internal lintels to 100 mm internal walls unless stated otherwise.

Brickwork below d.p.c. to be F.L. quality

All soakaways to be minimum 1 m deep.

All external lintels to be insulated type.

All external joinery to be fully draught proofed.

Loft hatch to be draught sealed and latched shut.

Insulation in roof space to meet with insulation in external cavity walls to prevent cold bridging.

To all domestic floors to external perimeter walls provide 25 mm thick insulation dressed up walls to prevent cold bridging.

Seal all openings and joints to perimeter walls.

All doors, windows and any loft hatches to be effectively sealed and draught proofed.

All new windows to be white UPVC double glazed to match existing.

External Materials
Facing bricks and roof tiles to match existing.

Roof pitch to match existing. Roofline, fascia, floor level, ceiling level, etc. all to match existing.

Fascia and bargeboards to be white UPVC to match existing. Re-use where possible.

Kitchen/Utility/Bathroom/WC Trickle Ventilation
Provide proprietary trickle ventilators to head of window giving a total opening area of not less than 4000 mm².


Roof Insulation
To roof spaces provide proprietary 200 mm thick insulation laid as 100 mm between joists and 100 mm across joists. Ensure a gap of 50 mm between roof underfelt and quilt at all times.

Foul Water Drainage
Underground drainage to be proprietary 110 mm diameter p.v.c. pipes flexible jointed to fall 1:70 bedded in 100 mm pea gravel. Under building drains to be encased in 150 mm pea gravel with lintel over pipes at wall abutments. Surround pipes at wall abutments with 50 mm compressible material. 110 mm diameter soil and vent pipe to extend 900 mm above window head and to terminate in balloon finial. Soil and vent pipe to be fitted with access plate at base. Provide suitably sized wastes from all appliances (in accordance with Approved Document H) complete with minimum 75 mm deep sealed traps and rodding eye access points at every direction change. All above ground drainage to BS5582 and all underground drainage to BS8301.

Surface Water Drainage
To be proprietary 110 mm diameter p.v.c. pipes flexible joined to fall 1:70 bedded in 100 mm pea gravel. Pipes to discharge into 1200 mm diameter soakaways sited 5000 mm away from buildings.

Protection to Underground Pipes
Where pipes are not under road and have less than 600 mm cover concrete paving slabs should be laid as bridging above the pipes on minimum 75 mm pea gravel. If flexible pipes are under a road and have less than 900 mm cover reinforced concrete bridging should be used instead of paving slabs.

Inspection Chamber Construction
Proprietary polypropylene inspection chambers bedded on 150 mm concrete. Form protective 255 mm thick concrete collar around head of inspection chamber with 300 mm projection from cover. Covers to be Grade C light duty unless inspection chambers are in driveways where Grade B medium duty covers are to be used.

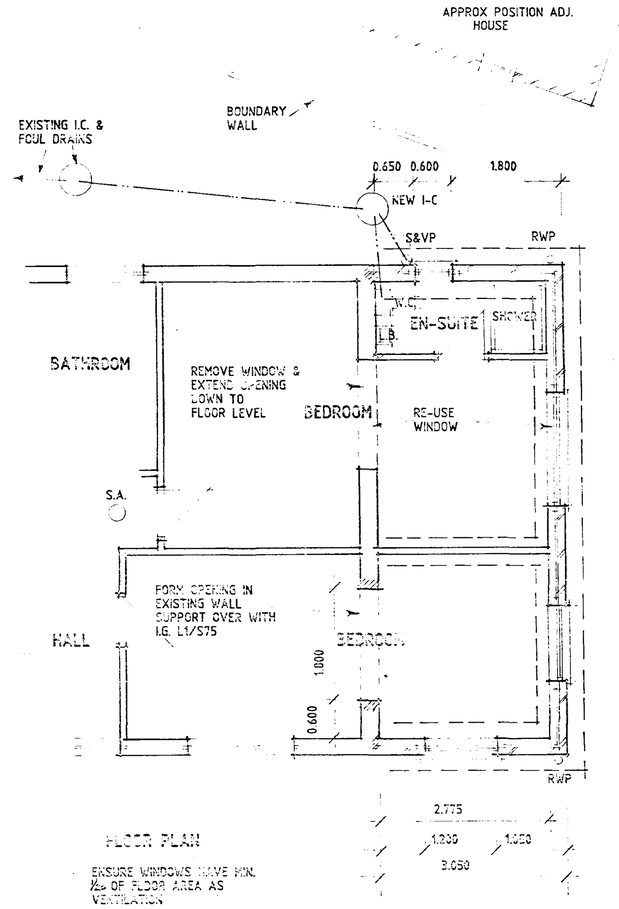


Roof Construction
Concrete interlocking roof tiles (see site plan for details) on 38 x 25 mm softwood treated timber battens on underfelt to BS747 (Type 1F) lapped 150 mm horizontally and 100 mm vertically. Prefabricated roof trusses at 600 mm c/c and pitch as stated in accordance with BS5268, 1985. Provide 25 x 100 mm timber bracing and fix in accordance with truss manufacturers instructions. All trusses and gable ladders (if any) to be strapped to 50 x 100 mm timber wallplate, the gable wall at verges and ceiling level with 30 x 5 mm. mild steel anchor and lateral restraint straps to span minimum 3 no. trusses at a maximum of 1200 mm c/c. At strap positions provide pack and noggins to trusses. Main contractor to supply local authority building control with roof truss calculations 28 days prior to erection on site.

Ceilings
To all insulated roof ceilings provide 12.5 mm Gyproc Duplex plasterboard or similar and either 5mm skim or Artex finish. To remaining ceilings provide 12.5 mm Gyproc plasterboard or similar with finishes as above.


Ground Floor Construction
65 mm sand/cement screed on proprietary 50mm thick floor insulation with perimeter insulation to screed on 1200 gauge polythene d.p.m. on 100 mm concrete oversite on minimum 150 mm, maximum 600 mm well blinded and compacted hardcore. Wall d.p.c. to lap floor d.p.m. by a minimum of 50 mm.

Lintels
All coded lintels as stated in Schedule or marked on plan to be by IG. To be installed in strict accordance with manufacturers instructions. Form d.p.c. cavity tray above all lintels. To all exposed lintels i.e. not sheltered from overhanging eaves, etc. to have proprietary weepholes to joints of brickwork at approximately 450 mm c/c.


Sub-structure Walling
100 mm [illegible] concrete blocks. Bitumen felt d.p.c. to [illegible] mm above ground level. Weak mix infill to base of cavities to terminate 225 mm below lowest d.p.c. level.

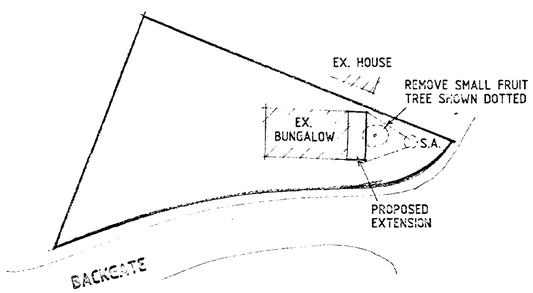


SITE PLAN

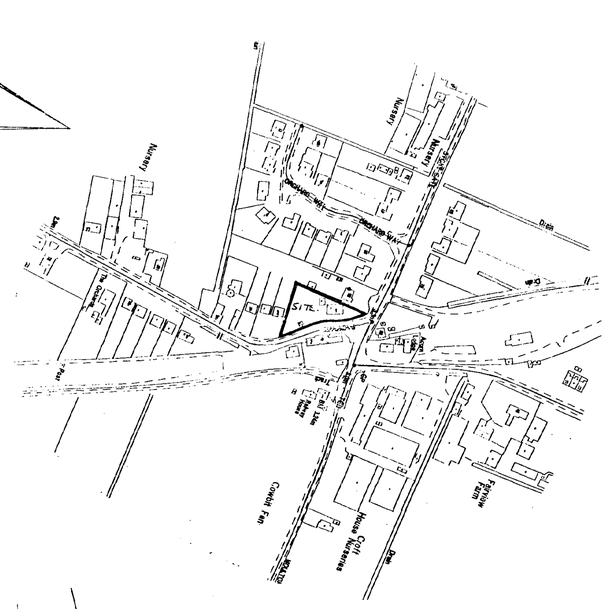

LOCATION PLAN

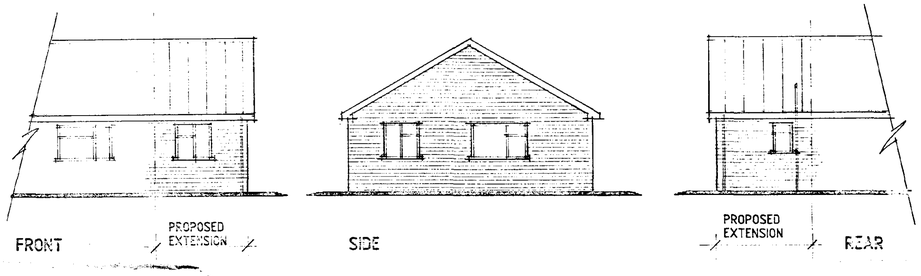

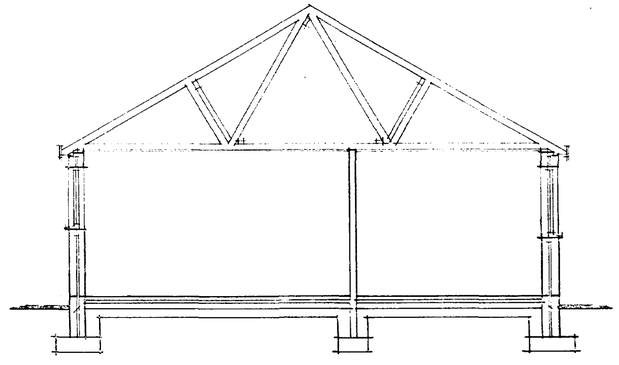
SECTION

Notes and Revisions

Do not scale from this drawing.

This drawing is copyright and may not be altered, traced, copied, photographed or used for any purpose other than that for which it is issued without written permission from Messrs. Status Design.

The General Contractor is to check all dimensions on site and report discrepancies to the Architect.

All details shown on this drawing are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions unless reported to the Architects so that design amendments may be considered.

Please note: This drawing is not a conveyance drawing.

Construction work to be carried out with due regard to the Construction(Design and Management) Regulations 1994 (CDM) and the Health and Safety at Work, etc. Act 1974 (HSW Act).

DESIGN Status
CONSULTANTS IN ARCHITECTURE & PLANNING

PROPOSED EXTENSION TO BUNGALOW AT 1, BACKGATE, COWBIT FOR

MRS M. BERISFORD

1:50 1:100 1:500 1:2500	772034/1
JUNE-99	B.GILHAM.

2 Edinburgh Walk, Holbeach, Spalding, Lincs. PE12 7AP
Tel: 01406 424343 Fax: 01406 490702

SOUTH HOLLAND DC
HOUSING & PLANNING
06 JUL 1999
Ref: 0660/99

DETERMINED PLAN