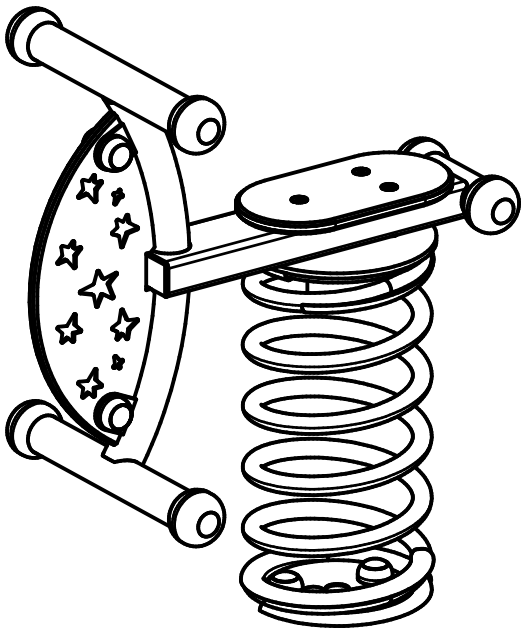


Spring Mobiles

Galaxy (Sit-on)

PROD. CODE	6060-094
SIZE	585x685x355mm
AGE RANGE	4 - 8 Years
F/ FALL HEIGHT	600mm
HEAVIEST PART	Approx 13 Kg
TOTAL WEIGHT	Approx 35.5 Kg

WICKSTEED playscapes

SPECIFICATION

Steel plate to EN 10025-2:2004
Steel CHS to EN 10255-2:2004
Steel RHS to EN 10210-2: 1997
Welding to EN ISO 14341:2011
HDPE to EN ISO 14632: 1998
Spring: BS EN 10089 51 CRV4

Polyester powder paint to EN 13438:2005
Standard fixings to BS 3692:2001 and BS 4190:2001
Non-standard fixings are anti-vandal and corrosion resistant

INSTALLATION INSTRUCTIONS

1. Read installation instructions through before commencing erection of unit.
2. Excavate foundations in accordance with the details shown in the foundation plan.
3. Position the Below Groung Fixing into the prepared hole.
4. Ensure that the Below Groung Fixing is plumb, square and at the correct height and orientation.
5. Backfill with 0.25 cubic m concrete. (4 parts gravel, 2 parts sand & 1 part cement)
6. Allow 48 hours drying time.
7. Once foundations have set attach the Spring Mobile Assembly to the Below Ground Fixing.
8 . Ensure that all fastenings are fully tightened.


Note Check Orientation Before Setting Below Ground Fixing in Concrete.

Note Ensure all installation aids are removed before first use.

Foundation Details

Care must be taken in abnormal conditions

Be sure to fit Below Ground Fixing in Correct Orientation




(Hole Pattern in Top of Below Ground Fixing)


Direction mobile will point

Ground Fixed

Bark Fixed


FSL = Finished Surface Level

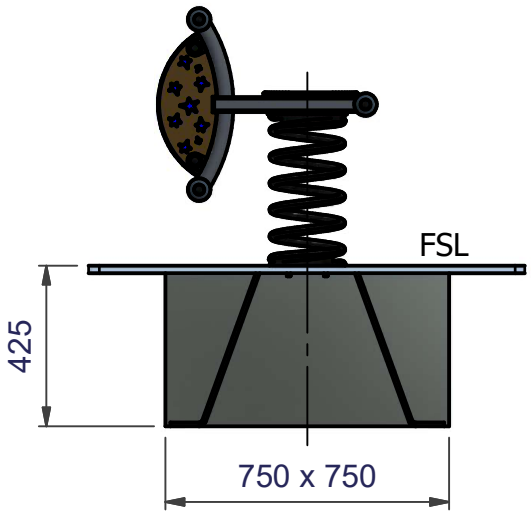

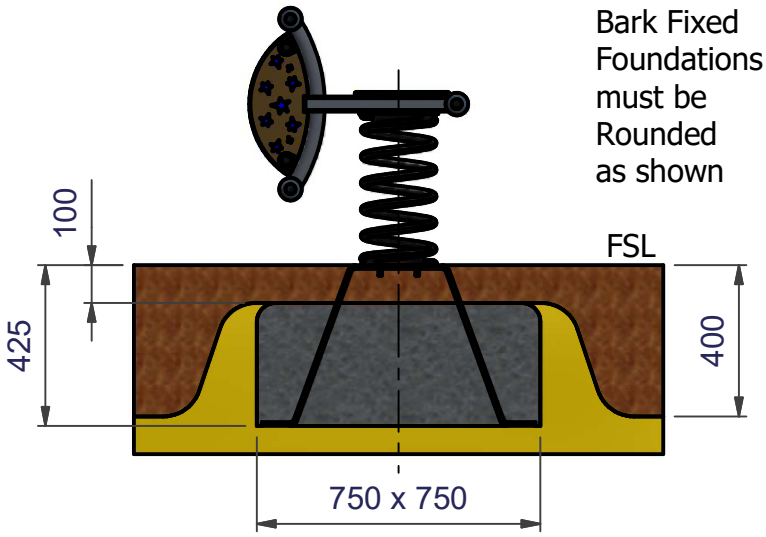

Bark Fixed Foundations must be Rounded as shown

Minimum and Free Space

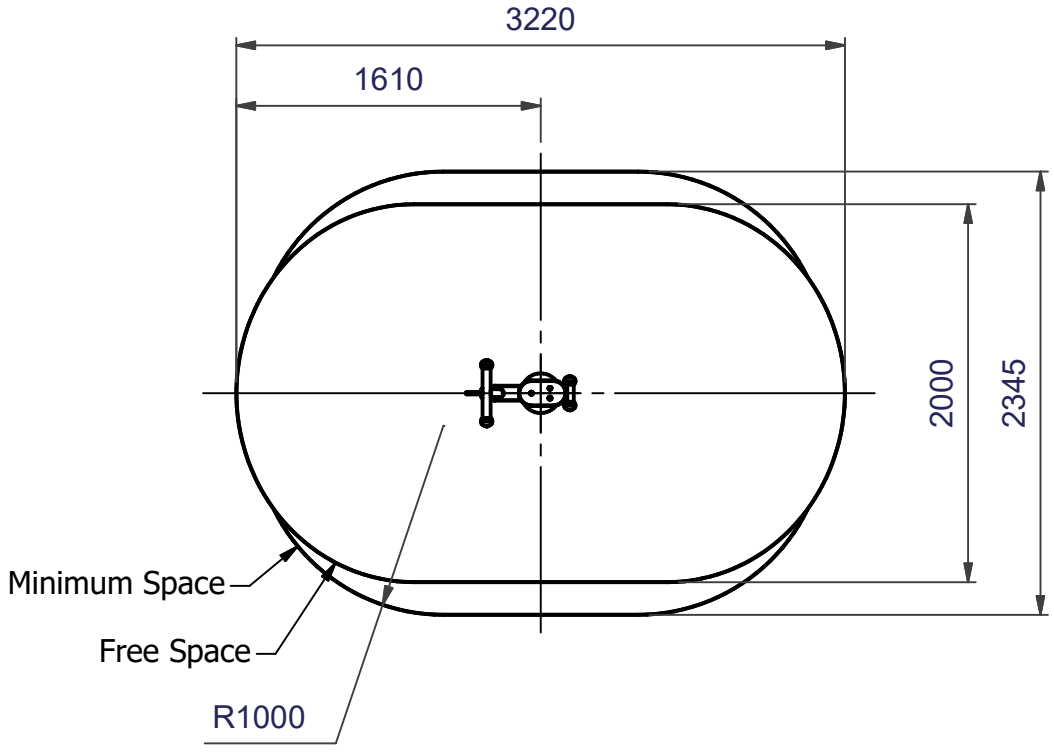


Safety Surfacing

Wetpour

Max FFH = 600mm

7.0 Sq. Metres of Wetpour Area
10.0 Linear Metres Wetpour Edging


* = Spring Centre

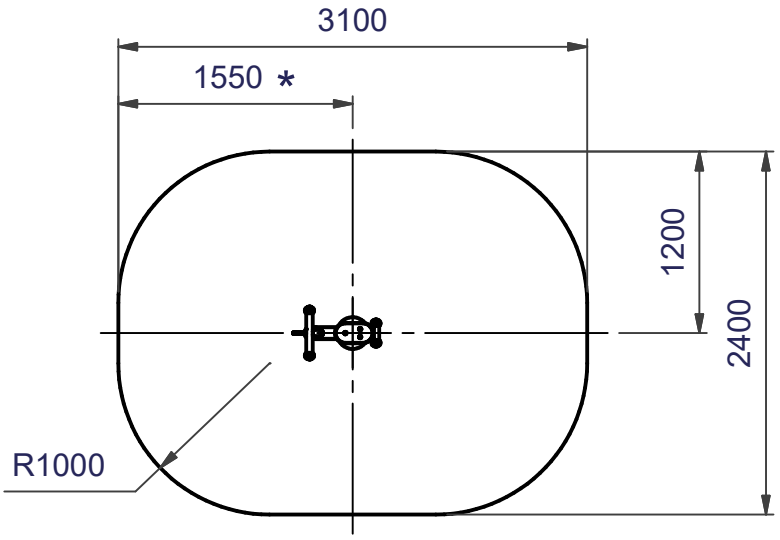


Grass Mats
(1500 x 1000mm)

7 off Total


* = Spring Centre

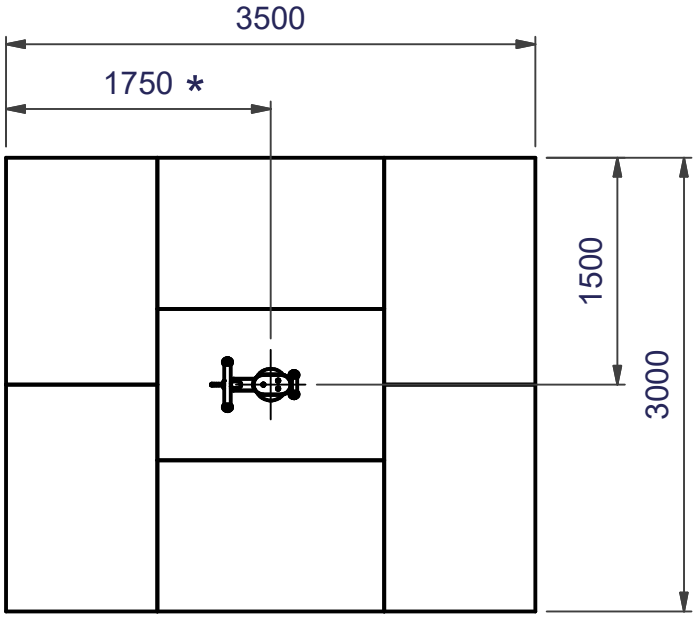


Exploded View

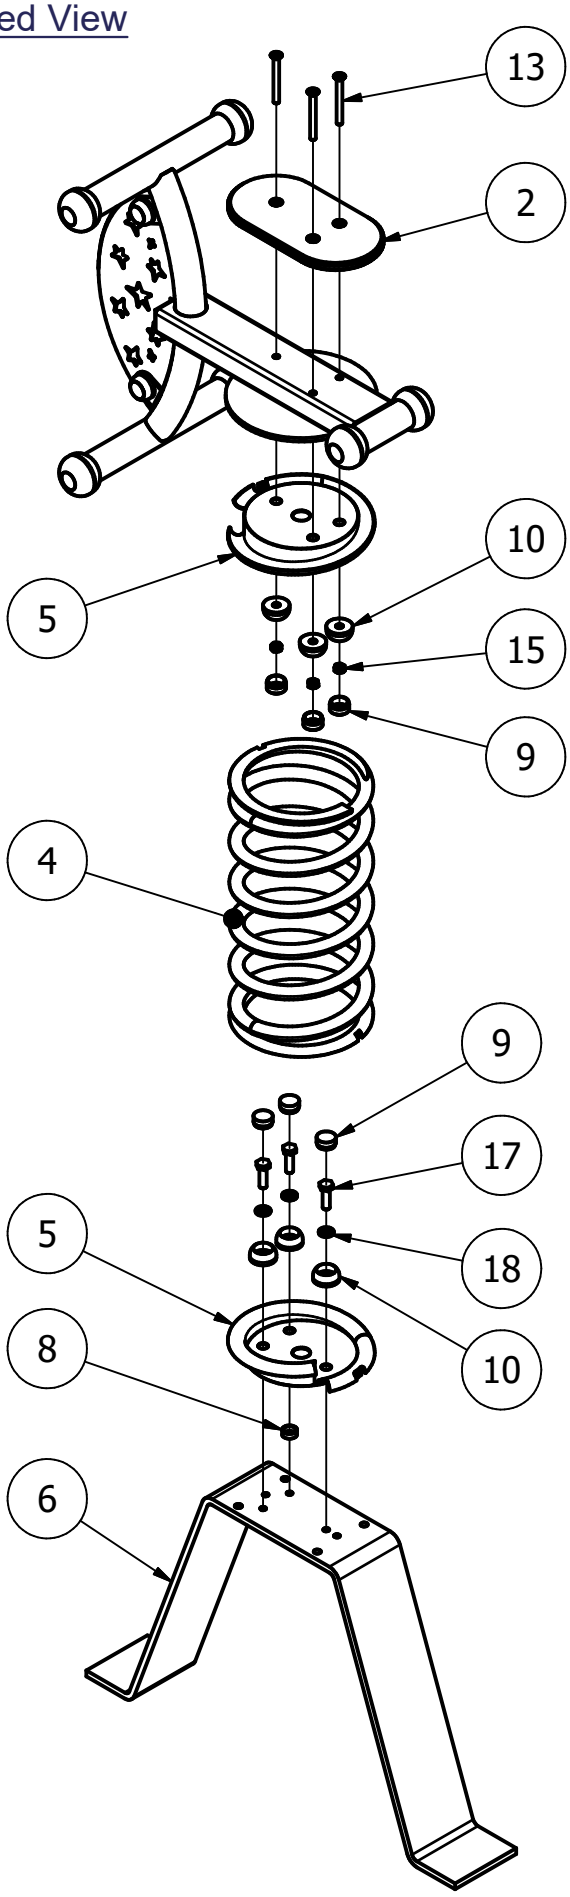

Enlarged View of Spring and Plates

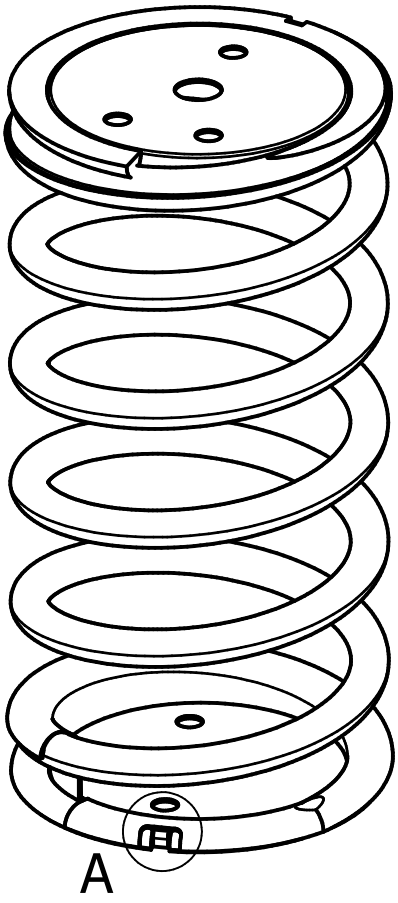

Clamping Plate should be fed into middle of spring and rotated into position ie Plate should be against the stop on the spring




Detail A

Enlarged View

Ensure Tab on Spring Plate is Located and Hammered Home into Notch of Spring (Both ends of Spring)

WICKSTEED playscapes

Exploded View

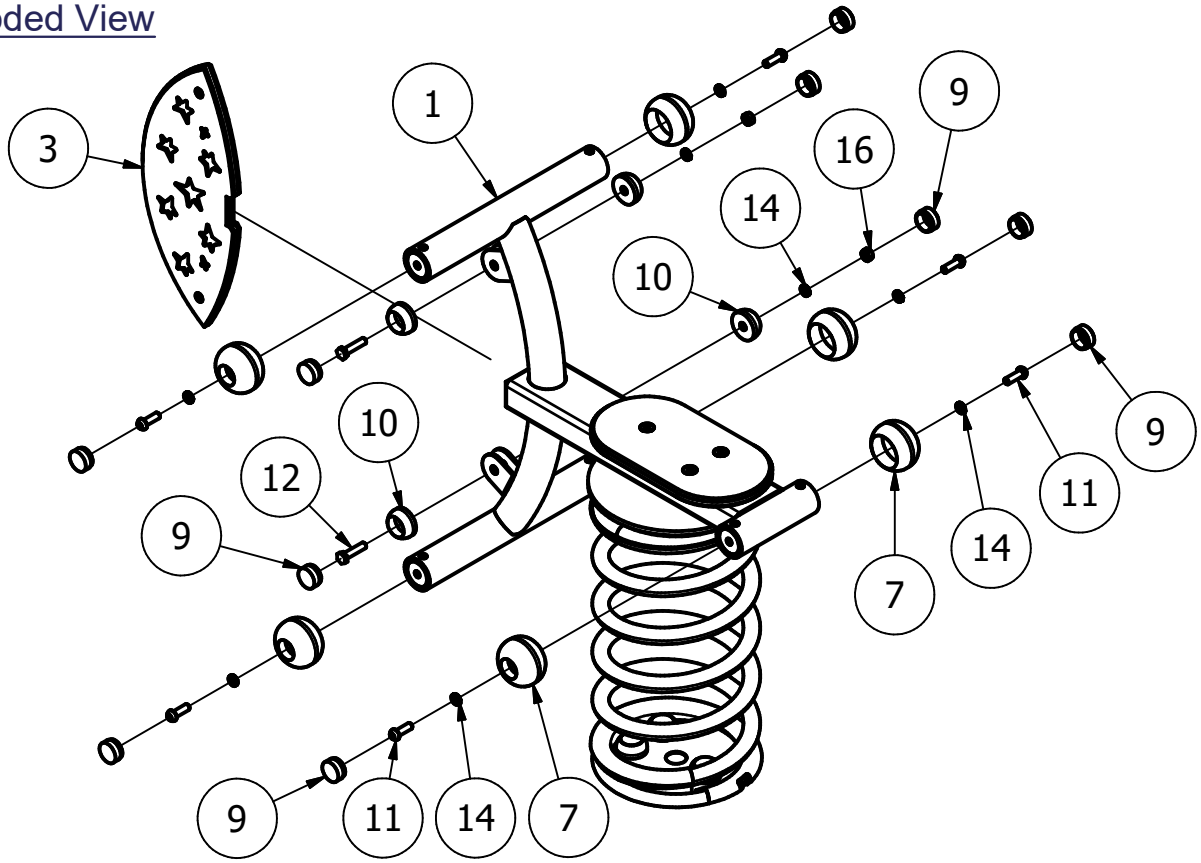

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	4202-358	Frame W.A.
2	1	3755-948	Galaxy (Sit-on) Seat Panel
3	1	3755-949	Pixie Front Panel
4	1	2900-028	Eibach Spring
5	2	2900-029	Spring Clamp Plate
6	1	3200-390	Below Ground Fixing
7	6	3730-159	Grip Final
8	1	3000-516	Spring Rocker Spacer
9	16	2611-031_Cap	Black Poeppelmann Cap
10	10	2611-031_Cup	Black Poepplemann Cup
11	6	2176-152	M8 x 25 Pent Button Head
12	2	2185-021	M8 x 35 Hex Head Bolt
13	3	2171-183	M8 x 80 C'SK SKT HD SCREW with PIN
14	8	2212-214	M8 NORD LOCK WASHER
15	3	2191-009	M8 Binx Nut
16	2	2193-004	M8 HEX NUT
17	3	2175-117	M10 x 35 Hex Head Screw
18	3	2215-508	M10 Washer

COMPILED MC	REV	0	1	2	3					
	ECN	1706	Minor	Minor	1813					
DATE: 14/11/14	SIG.	MC	MC	MC	MC					
	DATE:	14/11/14	06/09/17	07/12/17	02/02/21					

DESPATCH LIST

Product: 6060-094 - Spring Mobile - Galaxy (Sit-on) Date of Issue: 14/11/14

Order No: Issue: A

Item	Unit Qty	Description	Part No.	Checked
1	1	Frame Welded Assembly *	4202-358	
2	1	Galaxy (Sit-on) Seat Panel	3755-948	
3	1	Pixie Front Panel *	3755-949	
4	1	Eibach Spring	2900-028	
5	2	Spring Clamping Plate	2900-029	
6	1	Below Ground Fixing	3200-390	
7	1	Stores Issue Pack		
		*** Fitted to Frame Assembly prior to dispatch**		

Total No. of Items

Picked By: Checked By:

COMPILED BY: MC	REV	0					
	ECN No.	1706					
	DATE	14/11/2014					
DATE: 14/11/14	SIGN	MC					

FIXINGS LIST

Product: 6060-094 - Spring Mobile - Galaxy (Sit-on) Date of Issue: 14/11/14

Order No: Issue: A

Item	Unit Qty	Description	Part No.	Checked
1	6	Grip Final *	3730-159	
2	4	Black Popplemann Cup *	2611-031	
3	10	Black Popplemann Cap *	2611-031	
4	6	M8 x 25 Pent Button Head Screw *	2176-152	
5	2	M8 x 35 Hex Head Bolt *	2185-021	
6	8	M8 Nord Lock Washer *	2212-214	
7	2	M8 Hex Nut *	2193-004	
		Bottom Spring Plate To Below Ground Fixing		
8	3	M10 x 35 Hex Head Screw	2175-117	
9	3	M10 Washer	2215-508	
10	1	Spring Rocker Spacer	3000-516	
11	3	Black Popplemann Cup	2611-031	
12	3	Black Popplemann Cap	2611-031	
		Top Spring Plate To Frame		
13	3	M8 x 80 C'sk Skt Head Screw c/w Pin	2171-183	
14	3	M8 Binx Nut	2191-009	
15	3	Black Popplemann Cup	2611-031	
16	3	Black Popplemann Cap	2611-031	
		*** Fitted to body assembly prior to dispatch**		

Total No. of Items

Picked By: Checked By:

COMPILED BY: MC	REV	0	1	2			
	ECN No.	1706	Minor	Minor			
	DATE	14/11/2014	06/09/2017	07/12/2017			
DATE: 14/11/14	SIGN	MC	MC	MC			