FLOOR PLAN

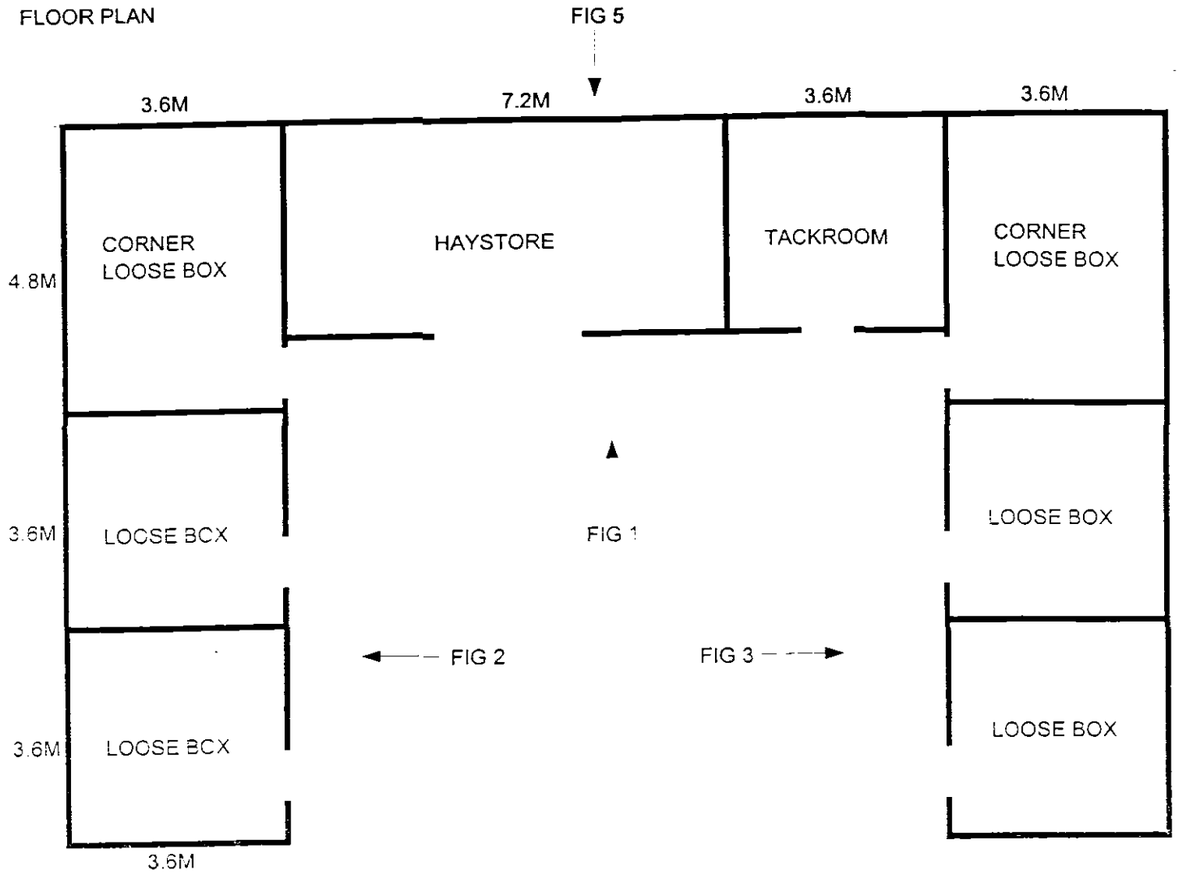


FIG 6 ►

◄ FIG 4

50 X 75mm TANALISED TREATED CLS FRAMING @ 600mm CENTRES
16 X 150mm TANALISED TREATED SHIPLAP CLADDING
50 X 100mm TANALISED CLS ROOF PURLINS
BLACK ONDULINE ROOFING
PLANKED STABLE DOORS
SLIDING PERSPEX WINDOW WITH BARRED GRILLE BEHIND
100mm BLACK HALF ROUND GUTTER TO FRONT

SCALE 1:100

PLEASE NOTE THE ABOVE DRAWINGS ARE NOT TO BE USED FOR ANY BASEWORKS

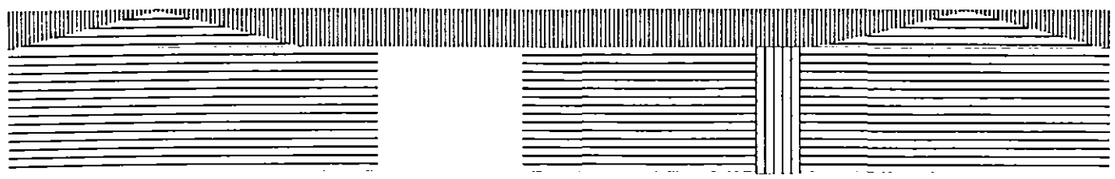


FIG 1

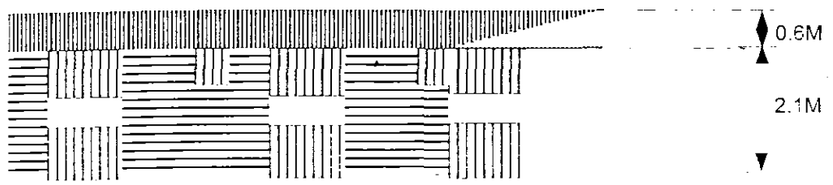


FIG 2

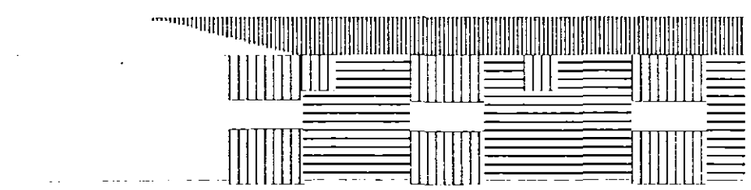


FIG 3

DETERMINED PLAN

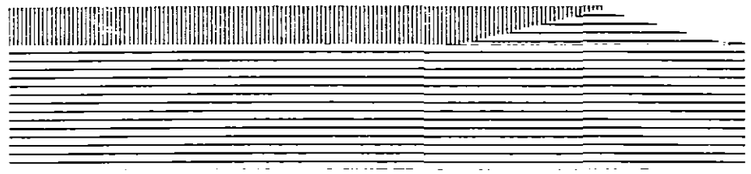


FIG 4

SHDC
Planning & Development
2 6 MAY 2004
Ref: 0701/04

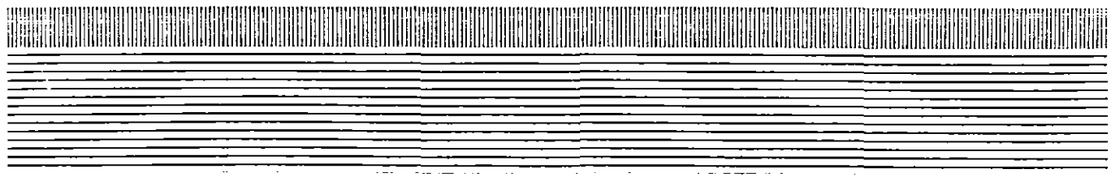


FIG 5

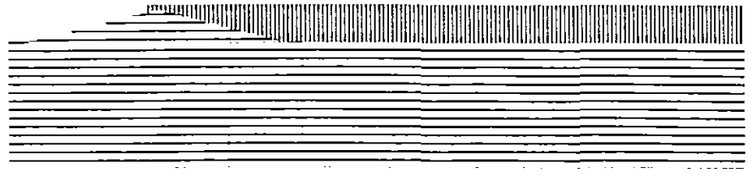


FIG 6

SD04-021/2

126.725m