

			Plantin	g Schedule	(Individual)					
Herk	paceous									
Nr	Code	Plant Name	Height/Spread/Grade	Girth	Age	Root	Container	Habit	Form	Density/m2
4	Вс	Bergenia cordifolia	20-25cm			С	5L			3.00
10	GJB	Geranium 'Johnson's Blue'	30-40cm			С	3L			4.00
Shru	b									
Nr	Code	Plant Name	Height/Spread/Grade	Girth	Age	Root	Container	Habit	Form	Density/m2
26	CtS	Choisya ternata 'Sundance'	30-40cm			С	5L	Bushy		3.00
73	EfEG	Euonymus fortunei 'Emerald 'n' Gold'	20-25cm			С	5L	Bushy		3.00
59	FMP	Fuchsia 'Mrs Popple'	30-40cm			С	5L	Bushy		3.00
21	HaRE	Hebe albicans 'Red Edge'	40-60cm			С	3L			5.00
41	HWG	Hebe 'White Gem'	30-40cm			С	5L	Bushy		3.00
13	HxM	Hypericum x moserianum	5L			С	30-40cm	Bushy		3.00
82	LaH	Lavandula angustifolia 'Hidcote'	30-40cm			С	5L	Bushy		3.00
13	Lnc pl	Lonicera pileata	30-40cm			С	5L	Bushy		3.00
58	PfAb	Potentilla fruticosa 'Abbotswood'	30-40cm(D)			С	5L	Bushy		3.00
214	PL (h)	Prunus lusitanica (hedge)	60-80cm			С	5L	Bushy		5.00
18	PRR	Photinia x fraserii 'Red Robin'	60-80cm		1/1	С	5L			3.00
3	PSR	Pyracantha 'Saphyr Red'	60-80cm			С	3L	Leader and laterals		/lin. m
4	PtBB	Phormium tenax 'Bronze Baby'	60-80cm		2x	С	10-15L			
3	PYW	Phormium 'Yellow Wave'	60-90cm			С	10-15L	Triple crown		
4	SjG	Spiraea japonica 'Goldflame'	30-40cm			С	5L	Bushy		3.00
24	SjN	Skimmia japonica 'Nymans'	30-40cm		0/1	С	5L			3.00
58	Sk KG	Skimmia confusa 'Kew Green'	30-40cm			С	3L	Bushy		4.00
Tree	•									
Nr	Code	Plant Name	Height/Spread/Grade	Girth	Age	Root	Container	Habit	Form	Density/m
2	Buj	Betula utilis jacquemontii	400-500cm	16-180cm	3x	RB			Extra Heavy Standard	

NOTES ON PLANTING

1 Topsoil: Topsoil shall be spread to min 450mm depth over planting beds and 150mm depth over turf areas and graded to fall. Topsoil should be in accordance with BS3882:2015 and where subsoil is required, to be in line with BS8601:2013.

2 Herbicide and Cultivation: Topsoil to be treated with an application of herbicide prior to planting, where necessary, strictly in accordance with the Control of Pesticides Regulations 1986 (or otherwise updated/ superceded legislation), and following manufacturer's instructions by qualified staff. The topsoil shall then be cultivated to 150mm depth.

3 Container Grown Shrubs: Shrubs shall comply with the National Plant Specification. Shrubs shall be planted in pits 300 x 300 x 200mm depth, and the backfill shall include 3 litres Peat Free Tree and Shrub Compost. Specimen plants to be planted in a pit 400 x 400 x250mm depth with 5 litres Tree and Shrub Compost.

4 Herbicide: Spot treat with herbicide throughout the maintenance period in accordance with the manufacturer's instructions.

5 Bark Mulch: All Ornamental Planting beds to receive 75mm depth pulverised ornamental bark mulch.

6 Position of Plants: Final position of trees and shrubs subject to confirmation of service location and approval of statutory undertakers.

TREES - EXTRA HEAVY STANDARDS Tree pits for extra heavy standards to be 900 x 900 x 900mm with 300mm of good quality topsoil and backfilled with sub soil. Stakes to be 65mm diameter treated softwood driven firmly into the ground. Stakes to be 600mm above ground level and fixed to tree with suitable rubber tree tie.

7 Watering: Plant only into moist soil and water thoroughly to the full depth of soil immediately after planting. Water regularly through the establishment period (minimum 3 months) to prevent dehydration. The trees should be watered through the irrigation pipe to ensure that the water gets down to the rootball. These trees should be watered regularly throughout spring-summer during the first 2 years to ensure that the tree root system establish well.


8 Grass Seeding: Sow late summer to mid autumn. Prepare ground by removing any existing vegetation, large stones and roughly levelling. Grass seed should be spread at 50g per sq. m. After sowing, lightly rake over area and water.

9 Turf: Complete ground preparations before turf is delivered to site to avoid turf drying out. Turf should be laid immediately on delivery. Remove all existing vegetation from area to be turfed and spread 150mm depth of top soil. Dig over or rotavate soil before laying turf if soil is compacted. Rake, lightly compact, and water soil. Stagger the joins when laying the turf. Water turf after laying and every day for the next 2-3 days, especially in periods of low rainfall.

10 Soil compaction is likely to have occurred during construction on site. A site inspection should be carried out by a landscape professional to assess the level of soil compaction, including drainage testing to see if the ground is likely to become waterlogged. If the ground is deemed to be too compacted for plant growth and to drain adequately then remediation works should be carried out. This could include rotavation of the soil using a push along rotavator and/or ground being broken up with spades or small machinery. A second site inspection should then take place to ensure that the soil is fit for

purpose.

LOCATION PLAN

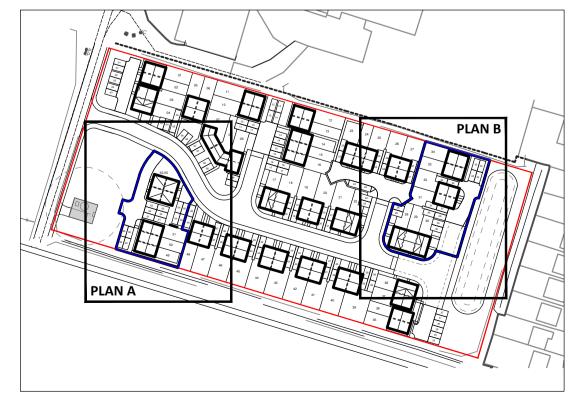

LEGEND

Proposed Grass (Rear Gardens) To be seeded

Proposed Grass (Front Gardens & POS) To be laid with turf

Proposed Ornamental Planting Mixed shrub and herbaceous planting 5-7ltr pots with 10ltr specimens Planting beds to receive 75mm depth ornamental bark mulch.

Proposed Formal Hedge To be planted at 60-80cm container stock at 5 per lin.m

Proposed Deciduous Tree (Single Stem) Extra Heavy Standard trees, 16-18cm girth, 4.5-5m high to be planted with a double-timber stake nign to be planted with a secured with a rubber tree tie.

PHASE 1:

Refer to Planting Plan ref. 3448 201 and 3448 202

REVISION NOTES

Rev	Ву	Description	Date
Α	DC	Updated in line with architect comments	11.09.19

Longhurst Group Limited

Crease Drove, Peterborough

Description Planting Plan (Phase 2)

For Approval Scale @ A1

Checked Drawn 1:250 09.09.19 KD DC Job number Drawing number 3448

Date

Revision



tel: 0161 235 0600 fax 0601 email info@tpmlandscape.co.uk