Q-STREET PRO EXTERNAL LIGHT

QSTREET-PRO-100NW/PH

QVIS® LIGHTING & SECURITY

EXTERNAL RANGE



IP66

15000 LUMENS

100W POWER

6YR WARRANTY

2YR ON-SITE

MEAN WELL Driver as Standard


LUMILEDS LED's inside

AVAILABLE WITH A 60MM OR 76MM SPIGOT ATTACHMENT

Specification	Street Light
System Power	100W
Driver Manufacturer	Mean Well
LED Chipset	Lumileds
Colour Rendering Index	>80
Beam Angle	70° x 155°
Lumen Output	15000Lm
LED Efficacy	150 Lm/cW
Power Factor	>0.95
IP Rating	IP66
Energy Saving	Integral Photocell Sensor
Colour Temperature	4000K
Housing Material	Aluminium
Lens Material	IK08 Tempered Glass
Input Voltage	AC100-277V
Operating Temperature	-40 to 60 °C
THD	< 20%
Dimensions (without socket)	490mm x 233mm x 243mm
Weight	6kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

TECHNICAL DRAWINGS

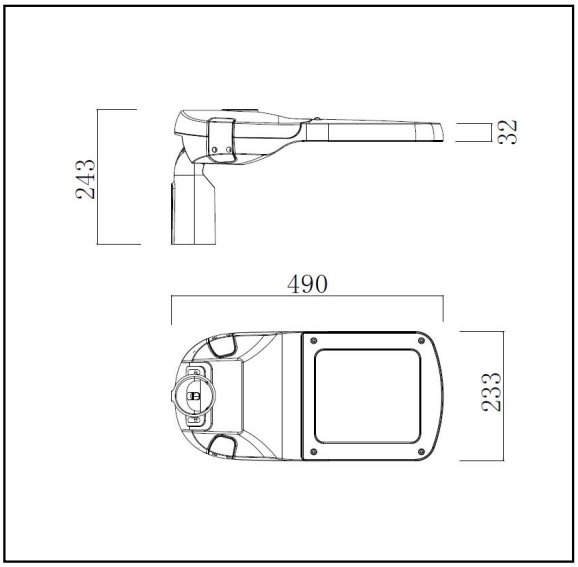

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

