SPECIFICATION NOTES - REFER ALSO TO THE TENDER DOCUMENT.

1.0 Setting out

1.1 Planting shall be set out exactly as shown on the drawing, and measured from existing fixed points. Curved beds shall be set out using rasli scribed on the ground, using two pointed stakes and a line between, or with site marker paint. The junction between convex and concave curves shall be cut to form a smooth and even flowing line. Check that all setting out conforms to the plan before cultivation and planting works are carried out. Failure to do so may result in rejection of the work by the landscape architect and may require amendment at the contractor's expense.

1.2 All planting beds shall be a minimum of 1 metre wide, except where there is insufficient space, due to the constraints of walls and path edgings and their foundations. With narrow beds between walls/ fences and path edgings, ensure that the bed has space free from concrete footings before planting, if the bed is sealed with concrete, then the landscape contractor shall contact the site manager or landscape architect to determine if footings are excessive and can be reduced or else, the bed can be paved. The width of all beds will be checked by the inspecting landscape architect and where the width is not as drawn, the contractor shall re- cultivate them to the specified width at his own expense.

2.0 Ground preparation

2.1 Pre-planting herbicide application:- Apply by suitable spraying apparatus, an approved translocated systemic herbicide to the manufacturer's instructions and to 1997 Control of Pesticides Regulations and 2020 COSHH regulations on all beds, except those which are both weed free and are to receive agrotextile sheet mulch. Spray immediately if any weeds are present, if no weeds are showing but planting is delayed, spray after one month following cultivation, to allow dormant seed to germinate. All spraying shall be carried out by skilled and qualified operatives, using protective clothing, in suitable weather (no wind) and any damage caused by spray drift, from incorrect usage or spillage, shall be rectified at the contractor's own cost. Do not spray near a water body. Repeat as necessary to ensure complete kill and rake off all dead material from site.

2.2 Carry out the following works to the existing topsoil on site to ensure it Conforms to BS 3882:2015, being free from rocks larger than 50m diameter, concrete, all roots, wire, brick, and have less than 20% clay. Allow for pre-application of herbicide as above, Fertilise with 100g per meter square of Hortibase CRF (16-8-12) slow release fertilizer, in accordance with the manufacturer's instructions. For beds less than 5 meters in width, fork over thoroughly or machine rotovate soil to a depth of 450mm, ensuring that the subgrade and topsoil are completely broken up and free draining, relieving any compaction, For beds greater than 5 metres in width, break up the subgrade and topsoil using a tractor mounted subsoiler or ripper at 500mm centres to a depth of 500mm,except where there are services, or within 10 meters of tree stems or 3 meters of existing hedges, Do not rip areas where roots greater than 10mm diameter are encountered.

2.3. Determine before submitting a tender, the extent of support from the site manager with ground preparation: ensure soil of all planting beds is graded to a level 65mm below adjacent grass or paved surfaces, within 40-60mm of edges to ensure bark or wood chip mulchs are retained, Where grass is proposed adjacent to paving, then the soil level shall be flush with the adjacent paved surfaces, to receive rain water run off, The landscape contractor is responsible for ensuring that the final product conforms to the specification even where the developer and/or main contractor have failed to supply and spread topsoil to the recessed level, The landscape contractor shall allow for adjustment of levels, as specified above, including for re-grading subsoil and topsoil. Where beds are sloping, ensure that topsoil is graded to the specified levels below pavement & grass surfaces within 40mm of the edges of the bed. This is to allow for sheet mulch and bark or wood chip mulch so that mulch does not spill out on to pavements and also to allow surface water to drain from paths on to planted areas.

2.4 Sloping ground that is shown to be turfed where there is paving adjacent to it topsoil levels of the grass areas shall be graded to finish flush with the finished pavement level to allow surface water to drain from pavements to soft areas. Soil of grass areas should therefore never be proud of paved areas. Soil levels more than 10 mm below pavement edges will cause mower damage on cutting.

2.5 Imported topsoil (where specified and sanctioned by the employer) for making up ground, shall conform to BS 3882: 2015, and be free from rocks (over 50mm diameter), concrete, roots, wire and brick, and have less than greater than 20% clay. Such soil shall be cultivated as set out above. Representative samples shall first be approved by the landscape architect before being supplied to site. No imported soil shall be supplied to site without a written instruction.

3.0 Planting

3.1 All planting must be carried out in accordance with the tender document, and accompanying drawings. Refer to the tender document for the preparation of existing topsoil and required depths for planting, turfing, and trees, and also for contractual maintenance requirements.

3.2 No substitutions will be accepted without the prior agreement of the inspecting landscape architect, The contractor shall replace at once at his own cost any stock size, species or variety of plant which has not been specified on the planting plan and schedule, unless via prior written agreement, a substitution has been agreed by the inspecting landscape architect, All plants shall be true to size specified in the schedule of plants and associated notes, Cl. pots are 17cm diameter and 15cm deep, 3L pots are 19cm diameter and 15cm deep, 5L pots are 22.5cm diameter and 18cm deep, 10L pots are 28cm diameter and 22.5cm deep, 15L pots are 33cm diameter and 30cm deep, 20L pots are 36.5cm diameter and 30cm deep, 30L pots are 41cm diameter and 36cm deep, 45L pots are 50cm diameter and 45cm deep, 50L pots are 55cm diameter and 50cm deep).The pot sizes will be checked on site to ensure compliance with those specified, Pots will be rejected if shrubs are supplied of a size which are not fully grown into the pot e.g. a 9cm plant recently potted into a 3L container, All shrubs, shall possess a height and spread in accordance with the plant schedule, Anything less than IHTA National Plant Specification standards for each species and pot size will be rejected. Plant stock shall be bushy, healthy, disease free, not pot bound, leggy or spindly, There should be a minimum of 5 breaks per shrub, This specification is the minimum standard required and any stock falling below this standard, in the sole opinion of the inspecting landscape architect, will be rejected and shall be lifted and replaced at the contractor's expense.

3.3 All shrubs, herbaceous plants, whips and transplants shall be watered in on planting with 20 litres per square metre. Trees shall be watered in with 50 litres per tree position. Water thereafter during the contract period at weekly intervals with 30 litres of water per tree position.

3.4 Proposed feathered trees to be true to the species, variety and size as specified on the planting plan, to include 1.8m long, 100mm diameter, chestnut stake above ground dimension to be 1/3 the height of the tree, stakes to be driven vertically and 1No. sackcloth or rubber tie, with spacing device, all positioned 25mm maximum from the top of the post,

3.5 Proposed standard trees to be true to the species, variety and size as specified on the planting plan, to include 2No. 2.2m long, 100mm diameter, chestnut stakes, above ground dimension to be 1/3 the height of the tree, stakes to be driven vertically, supply and fix securely (twice screwed to each end) a half round cross brace (100mm diameter) with rubber spacer block fixed between tree stem and the cross brace and secured with 1No. sackcloth or rubber tie so the tree is securely restrained and there is no chance of the the stem chafing with the cross brace,

3.6 Turf to be of cultivated grade such as Rolawn "Medallion", or other of similar quality and source, approved by the landscape architect. The contractor shall replace at once any turf rejected by the landscape architect at his own cost, insure that the turf is laid flat and is free from hollows, lumps and bumps, cracks or brown or dead patches or other defects and that turf is well watered before before laying and again after laying, Turf areas shall be laped off using high-vis tape until well established, Access shall be only with timber scaffold planks to prevent compaction.

3.7 Soil clinging climbing shrubs or wall shrubs, with "S" written after the climber name, shall be trained to the wall/fence with heavy duty, plastic coated garden wire, Training wires shall be attached vertically to the wall/fence by means of 125mm long stainless steel eye screw fittings, Position 1No. at 250mm from ground and 1No, 250mm from top of the wall/fence, and string the wire tightly between the fixings, Train the climber to the wire with plastic coated garden wire tags,

3.8 Twining varieties of climber, with "T" written after the climber's name (in specially prepared pits or general shrub beds) shall be trained to walls/ fences by mounting readywaste trellis panels 1.8 x 1.8m generally (but 1.8 x 0.6m for corners or where space is restricted), Include for adapting any panels for locations where walls or fences are lower than 1.8m. Fix trellis panels to the walls/ fences using non rusting screws 125mm long (to be approved), incorporating 50mm cube wood spacing blocks to ensure that the panel is mounted sufficiently far from the wall/ fence to allow twining of stems, Ensure that all timber is pressure impregnated with a non phyto-toxic preservative and then painted with a dark brown non phytotoxic preservative wood stain such as Sadolin "Classic" Jacobean Walnut or similar and approved. Ensure that the trellis is not in contact with the ground, Train the climbing shrub to the trellis with plastic coated garden wire tags,

3.9 Climbers specified outside proposed shrub beds shall have specially prepared dimber pits, Climber pits shall be 400mm x 400mm and 450mm deep (minimum size), and be backfilled with topsoil (from site - unless otherwise agreed), Ensure the base of the pit is thoroughly broken up and free draining before back filling with topsoil, Ensure no damage to foundations and services, and make good all structures and surfaces disturbed, Fertilise with 50g of Hortibase CRF (16-8-12) slow release fertilizer. Water with 20 litres of water per climber pit,

GENERAL NOTES

-ALL DIMENSIONS IN MILLIMETRES
-DO NOT SCALE OFF THIS DRAWING
-ALL DIMENSIONS TO BE CHECKED ON SITE

(C)JAMES BLAKE ASSOCIATES LTD 2025

4.0 Mulch

4.1 Supply and spread suitable biodegradeable sheet mulch over planting beds, previously, cultivated, graded and fertilized topsoil before planting, and peg down at a minimum of 500mms centres, (300mm at edges) and beds less than 5m wide, Pegging this densely is essential to prevent flaps of material becoming exposed, Refer to the specification for biodegradable sheet mulch on plan,

4.2 Following planting, supply and spread evenly "Chunky-Chip Longevity" available from Suffolk Woodchips Ltd Tel, 07881 904100 to a depth of 50mm evenly spread over all planted areas, Finished mulch levels shall be no higher than 15mm below pavement or grass levels, 300-400mm of bed edges, to avoid any spillage onto pavements or lawns, N.B, no substitution of mulch type will be acceptable, It is essential to have a now-fines, large particled, brown wood chip to reduce weed growth, reduce wind blow and prevent break down and rotting,

5.0 BS codes

5.1 All workmanship and materials shall conform to the following codes:-
5.1.1 General landscape operations (excluding hard surfaces) - BS 4428:1989,
5.1.2 Trees in relation to construction- BS 5837: 2012 and BS 6549:1999, BS 3998:2010 (recommendations for tree works) unless otherwise specified, Arboricultural Association - Standard Conditions of Contract and Specifications of Tree Works 1996,
5.1.3 Nursery stock in accordance with latest horticultural trade association nursery stock specification entitled "National Plant Specification 2010",
Plants shall conform to:
-BS 8545 - 2014 Trees from Nursery to Independence in the Landscape
-BS 3936-1 : 1992 Nursery Stock - Specification for trees and shrubs
-BS 3936-2 : 1990 Nursery Stock- Specification for roses + AMD 6628,
-BS 3936-4 : 2007 Nursery stock- Specification for forest trees,
-BS 3936-9 : 1998 Nursery stock- Specification forbulbs, corms and tubers,
-BS 3936-10 : 1990 Nursery stock- Specification for ground cover shrubs,
-CPSE-Committee for Plant Establishment, Handling and establishing landscape plants 1996, Part 3, paragraphs 6.2 to 6.6,
5.1.4 Glossary for Landscape Works BS 4428 :1989
5.1.5 Turf - BS 3969:1998 + A1:2013 - recommendations for turf for general purposes,
5.1.6 Seeding - EEC Regulations 1974, Use blue labelled certified varieties to EC purity and germination regulations, When requested, submit an official seed Testing Station Certificate of germination, purity and composition,
5.1.7 Topsoil - BS 3882: 2015
5.1.8 Pesticides; Control of Pesticides Regulations 1997;The Health and Safety at Work Act 1974(2005) the COSHH Regulation 2020 and the product COSHH sheet, The Water Act 2014; the Floods and Water Amendment (EU Exit) Regulations 2019; Control of Pollution Act 1974; Hedgerow ACT 1997; Wildlife and Countryside Act 1981; Countryside and Rights of way Act 2000,

GENERAL NOTES FOR THE DEVELOPER.

6.0 Tree protection
6.1 Any existing trees to be retained, are the responsibility of the main contractor on site who shall take all necessary protective measures set out in BS 5837:2012 to ensure no damage to stems or roots, to prevent compaction from vehicles or storage of materials, contamination of soil from spillages, scorching from fires and instability or stress from changes of soil level, The landscape contractor is however responsible for ensuring that neither plant, materials or labour are cause of any damage to existing trees, and like the employer, the landscape contractor shall replace at once any tree damaged on site, supplying and planting a tree of the same species and size, at his own cost, Protection barriers will comprise a scaffold framework in accordance with Figure 2 of BS 5837:2012 (The BS),
The framework will consist of vertical and horizontal scaffolds with vertical tubes spaced at no more than 3m
intervals and driven into the ground, Weld mesh (Heras or similar) panels will be securely fixed on to this
framework with wire or scaffold clamps, Tubes will be driven into the ground to a minimum depth of 600mm,
Supporting struts will be fixed to the inside of the barrier to ensure maximum rigidity,

6.2 Ground work

6.2.1 Soil levels: soil levels for shrub beds and grass areas should have any compacted subgrade thoroughly broken up by machine before instructing the ground worker to spread topsoil or the landscape contractor to commence work or the beds will become waterlogged in wet weather and the plants and turf will die,

6.2.2 Top soil depth: Topsoil spread from the site should be to the following minimum depths:- Shrub beds: 450mm, Grass areas 150mm, allow for excavation of 415mm of the subgrade for shrub beds to leave beds 65mm below finished pavement or grass areas in order to receive sheet and bark mulch, Tree pits will be dug by the landscape contractor, Top soil for turf areas shall be spread to a level 10mm bellow paving inorder to receive the turf, Topsoil for grass seed areas, the soil level shall be flush with any finished paved surfaces after settlement to allow for rain water to drain onto soft surfaces, Settlement shall be no greater than 5mm or problems will be encountered with mowing (the blades in danger of bruching concrete edgings) or where soil is proud of pavements, then drainage problems will be encountered,

6.3 Existing topsoil and imported soil shall conform to BS 3882:2015, and be free from compaction, rocks/bricks greater than 50mm diameter, concrete, wire, roots, debris, oil, cement and builders rubble, Soil shall have a clay content of less than 20%,

7.0 Hardworks


7.1 Hard works, unless otherwise agreed, shall be carried out by the developer or main contractor, and all materials and workmanship shall be in accordance with the construction details and the layout plan,

7.2 All paths and edgings shall be set out properly to lines and radii, with all curves scribed on the ground using pointed pegs and string or site marker paint, achieving flowing natural arcs, Setting out shall be agreed with the landscape contractor and subsequently the landscape architect,

7.3 Hard surfaces shall be constructed after suitable base courses have been laid, taking full account of local site conditions, soft soils and substrate, The indicative depths of base courses are minimum depths assuming suitable substrate conditions,

7.4 All metalwork shall be finished hot dipped galvanized in accordance with BS EN ISO1460, The galvanizer shall be responsible for the thorough removal of all galvanizing smuts (fettling) to the complete satisfaction of the Landscape Architect, The decorating contractor shall prepare the galvanized surface by washing with detergent and water and scrubbing with a scouring pad until all dirt, grease, white rust & sulphates have been removed & then allowed to dry thoroughly, Supply and paint Tecsil 66307 from Sika Ltd (tel. 01707 374444) applied with a lurk/head brush strictly in accordance with the manufacturers instructions, COSHH regulations and the product COSHH sheet, Apply 2No. coats of paint with a dry film thickness of 100 microns per coat, Apply paint only when galvanized surface is thoroughly dry at temperatures above five degrees celsius and in any event above the current dew point temperature, Paint work will be subject to inspection by experts and if found warning, shall be stripped off, re-prepared and applied entirely at the decorating contractors own cost,

7.5 All wood work shall be pressure treated with Tanalith "E" water based wood preservative, applied by vacuum pressure, The timber shall then be stained with 3No. coats of Sadolin 'Classic,' colour 'Jacobean Walnut' strictly in accordance with the manufacturers instructions, COSHH Regulations 2020 and product COSHH sheet,

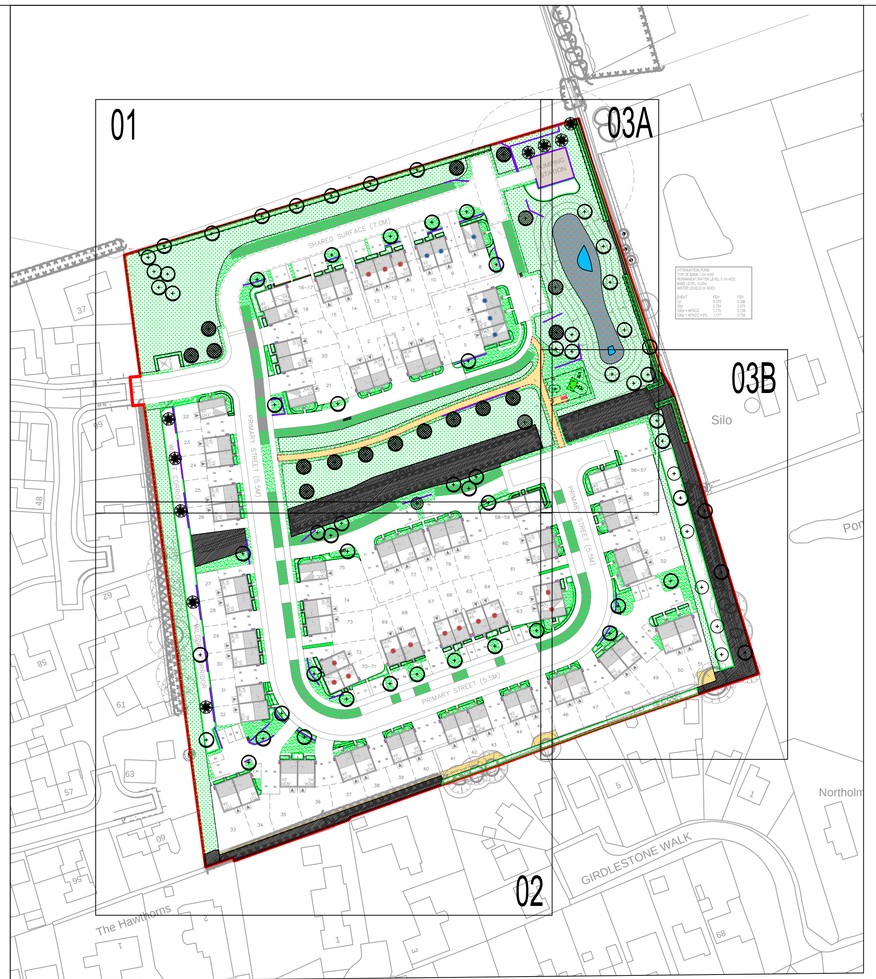

SPECIFICATION FOR HEDGE PLANTING

SPECIFICATION FOR NATIVE HEDGES, e.g. Mixed native or single species such as Carpinus betulus, Corylus avellana,
Hedges containing native and semi-native planting in rows shall be planted in three straight rows set 375mm apart at a density of 9 plants per linear metre. The three rows shall be placed in the centre of the bed and shall be offset so that the plants are alternate and not opposite each other. Plants to be according to the Plant Schedule.




SPECIFICATION FOR ORNAMENTAL HEDGE PLANTING - LARGE GROWING SPECIES, e.g. Osmanthus heterophyllus, Ligustrum ovalifolium, Viburnum tinus, Cotoneaster lacteus, Euonymus japonicus 'Aureopictus', Escallonia 'Apple Blossom' & Griselinia littoralis.

Hedges containing large ornamental species shall be planted in a single straight row at a density of 3 plants per linear metre. The row shall be placed in the centre of the bed. Hedge plants to be 3L container grown stock, 400-600mm height and spread unless otherwise stated.




SPECIFICATION FOR ORNAMENTAL HEDGE PLANTING - SMALL GROWING SPECIES, e.g. Euonymus japonicus 'Jean Hugues', Osmanthus delavayi, Lavendula spica 'Hidcote,' Hebe topiaria & Lonicera nitida.

Hedges containing small ornamental species shall be planted in a single straight row at a density of 9 plants per linear metre. The row shall be placed in the centre of the bed. Hedge plants to be 3L container grown stock, 300-400mm height and spread unless otherwise stated.



NB. Hedges adjacent to gravel areas shall have the cultivated strip separated from gravel by a timber edge 75 x 25mm of ACQ treated timber stained with 3No. coats of Sadolin 'Classic' colour 'Walnut' (dark brown wood stain) according to specification.

INSET DETAIL 1: SHRUB BED WITH COURSE WOOD CHIP MULCH OVER SUITABLE BIODEGRADABLE SHEET MULCH.
NOT TO SCALE

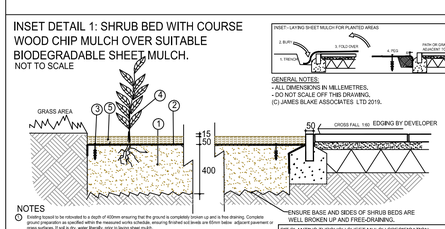



GENERAL NOTES:
- ALL DIMENSIONS IN MILLEMETRES.
- DO NOT SCALE OFF THIS DRAWING.
(C) JAMES BLAKE ASSOCIATES LTD 2019.

NOTES
1. Existing topsoil to be rotovated to a depth of 450mm ensuring that the ground is completely broken up and is free draining. Complete any fine cultivations by hand forking. Ensure that finished soil levels are 65mm below adjacent pavement or grass surfaces, if soil is dry, water liberally prior to laying sheet mulch.
2. Suitable biodegradable sheet mulch such as Hy-tex 'Ecotex Multimat' to be unrolled and placed in overlapping rows (overlap to be a minimum of 50mm). To be laid by hand by 200mm flaps of material at the extreme edges of the shrub areas and folding over itself (refer to inset on sheet mulch specification). Tuck in inward on the opposite side of the proposed shrub area and fasten dose to tucked in part with pegs.
3. Suitable pegs - homemade or at 500mm centres to secure sheeting, increase frequency to 300mm centres at edges to secure sheet mulch in margins.
4. Supply and pit plant shrubs through sheeting, Refer to pit planting through sheet mulch specification,
5. "Chunky-Chip Longevity" available from Suffolk Woodchips Ltd Tel. 07881 904100. Mulch to cover all of biodegradable fabric to a min depth of 50mm once all plants are planted, Ensure finished levels are 10mm below adjacent turf or hard surfaces.

N.B. (A) Do not use biodegradable sheet mulch on slopes greater than 1:3 without the use of gravel boards at 1 - 1.5m centres along the contours to retain the bark cover.
(B) For gravel/shingle areas utilise a non-biodegradable polypropylene woven fabric such as "Cowtex" from Hy-tex U.K. Ltd. tel. (01323) 730307. Cover the fabric all over with 40mm of clean, washed, cream / buff coloured gravel, 20mm gravel, unless otherwise stated in the keys.

PIT PLANTING THROUGH SHEET MULCH SPECIFICATION
A) Cut "H" shape in the fabric with scissors or sharp knife for each plant position. Each cut to be approximately 300mm - 500mm depending on the size of the shrub.
B) Fold back the fabric using knives etc and excavate pits of appropriate size, for example:- -300mm depth and 300mm radius of stem, for plants specified in 1lt, containers.
-450mm depth and 450mm radius of stem, for plants specified in 3L or smaller containers.
C) Ensure all sides / base are well broken up.
D) Fill plant so the nursery mark is flush with the ground.
E) Fold back fabric around stem and secure with pegs or 150mm "Grip 4 Me" fittibber to suppliers instructions and 25L over peat compost per m3.
F) Firm in and replace flaps of fabric tightly around base of plant stem, ensure there is no soil what so ever over the sheet mulch. Peg as necessary,
G) Water plants with 20L/plant for 10L stock and 10L/plant for 3L or smaller stock using a fine spray lance.
H) Spread "coarse grated hex-of-tree large wood chip mulch" 50mm deep. Finished surface levels to be 10mm below adjacent turf or paving.

SCHEDULE OF PLANTS

SHRUBS

QTY	CODE	PLANT NAME	STOCK	SPACING	SHC	DFB	MIN HEIGHT/SPREAD
34No.	Auc Var	Aucuba japonica "Variegata"	C.G.	10L 3/m2	C	600-800	x 600-800mm
28No.	Ber Pur	Berberis cordifolia "Purpurea"	C.G.	5L 4/m2	-	100-200	x 100-200mm
21No.	Bra Sun	Brachyglottis dunedin "Sunshine"	C.G.	5L 3/m2	B	200-300	x 200-300mm
36No.	Cho Azt	Choisya ternata "Aztec Pearl"	C.G.	10L 3/m2	C	400-600	x 400-600mm
71No.	Cho Sun	Choisya ternata "Sundance"	C.G.	10L 3/m2	C	400-600	x 400-600mm
43No.	Cis cor	Cistus x corbariensis	C.G.	5L 3/m2	B	300-400	x 300-400mm
3No.	Cis Dec	Cistus x dansereau "Decumbens"	C.G.	5L 4/m2	B	300-400	x 300-400mm
83No.	Euo Aur	Euonymus japonicus "Ovatus Aureus"	C.G.	5L 3/m2	C	400-600	x 400-600mm
49No.	Euo Eme	Euonymus fortunei "Emerald Gaiety"	C.G.	3L 5/m2	A	200-300	x 200-300mm
80No.	Euo Gol	Euonymus fortunei "Emerald 'n' Gold"	C.G.	3L 5/m2	A	300-400	x 300-400mm
18No.	Euo Bra	Euonymus japonicus "Bravo"	C.G.	10L 3/m2	B	600-800	x 600-800mm
42No.	Euo Blo	Euonymus fortunei "Blondi"	C.G.	5L 3/m2	B	300-400	x 300-400mm
15No.	Euo Pre	Euonymus "President Gaulitier"	C.G.	5L 3/m2	B	400-600	x 400-600mm
5No.	Ger War	Geranium x oxonianum "Wargrave Pink"	C.G.	5L 5/m2	-	100-200	x 100-200mm
41No.	Heb cha	Hebe "Charming white"	C.G.	5L 3/m2	C	300-400	x 300-400mm
28No.	Heb Glo	Hebe "Green Globe"	C.G.	5L 3/m2	B	300-400	x 300-400mm
16No.	Heb Mid	Hebe "Midsummer Beauty"	C.G.	5L 3/m2	D	1.5 300-400	x 300-400mm
40No.	Heb Met	Hebe "Mette"	C.G.	5L 4/m2	B	300-400	x 300-400mm
92No.	Heb rak	Hebe rakaiensis	C.G.	5L 4/m2	A	300-400	x 300-400mm
5No.	Hel nig	Helleborus niger	C.G.	3L 5/m2	-	100-200	x 100-200mm
26No.	Hel ori	Helleborus orientalis	C.G.	3L 5/m2	-	100-200	x 100-200mm
7No.	Heu Pal	Heuchera "Palace Purple"	C.G.	3L 5/m2	-	100-200	x 100-200mm
4No.	Hyd que	Hydrangea quercifolia	C.G.	10L 3/m2	D	1.5 400-600	x 400-600mm
10No.	Hyp Hid	Hypericum "Hidcote"	C.G.	5L 3/m2	C	600-800	x 600-800mm
34No.	Lav Hid	Lavendula angustifolia "Hidcote"	C.G.	5L 4/m2	A	300-400	x 300-400mm
17No.	Lon May	Lonicera nitida "Maygreen"	C.G.	3L 5/m2	C	300-400	x 300-400mm
53No.	Nan Lem	Nandina domestica "Lemlim"	C.G.	5L 3/m2	B	300-400	x 300-400mm
7No.	Pho Jes	Phormium "Jester"	C.G.	10L 3/m2	-	800-1000	x 800-1000mm
3No.	Pot Abb	Potentilla fruticosa "Abbotswood"	C.G.	5L 3/m2	B	400-600	x 400-600mm
2No.	Pot Eli	Potentilla fruticosa "Elizabeth"	C.G.	5L 3/m2	B	400-600	x 400-600mm
10No.	Ros Bon	Rosa "Bonica"	C.G.	3L 3/m2	B	300-400	x 300-400mm
4No.	San nea	Santolina neapolitana	C.G.	3L 5/m2	B	200-300	x 200-300mm
49No.	Sar con	Sarcococca confusa	C.G.	3L 4/m2	D	1.5 200-300	x 200-300mm
4No.	Sar hum	Sarcococca humilis	C.G.	5L 4/m2	A	200-300	x 200-300mm
10No.	Syi Gol	Spirea japonica "Goldflame"	C.G.	5L 3/m2	B	300-400	x 300-400mm
3No.	Syi Mou	Spirea "Goldmound"	C.G.	5L 3/m2	C	300-400	x 300-400mm
6No.	Vib tor	Viburnum x burkwoodii	C.G.	5L 3/m2	D	2	300-400 x 300-400mm
90No.	Vib dav	Viburnum davidii	C.G.	5L 3/m2	B	300-400	x 300-400mm

GRASSES AND SEDGES

QTY	CODE	PLANT NAME	STOCK	SPACING
41No.	Hak Aur	Hakonechloa macra "Aureola"	C.G.	3L 5/m2
8No.	Pen Ham	Pennisetum alopecuroides "Hameln"	C.G.	3L 3/m2

TOPIARY SPECIMEN SHRUBS/TREES PLANTED IN BEDS, GRASS OR GRAVEL

QTY	CODE	PLANT NAME	STOCK	SHC	DFB
2No.	TOP ILE	Topiary Holly (Ilex crenata "Convexa")	C.G.	10L	C

FEATHERED TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX Ht	WD
3No.	Ace cam	Acer campestre	O.G.	FTH	180-210cm	17m	22m M
1No.	Mal Syl	Malus Sylvestris	O.G.	FTH	180-210cm	8m	10m M
1No.	Pru dom	Prunus domestica	O.G.	FTH	180-210cm	8m	12m M

STANDARD TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX Ht	WD
1No.	ACE PSE	Acer Pseudoplatinus	O.G.	STD	10-12cm	17m	22m M
4No.	ALN GLU	Alnus glutinosa	O.G.	STD	10-12cm	14m	18m M
5No.	AME ROB	Amelanchier lamarckii "Robin Hill"	C.G.	STD	8-10cm	7m	8m M
1No.	BET FAS	Betula pendula "Fastigiata Joes"	C.G.	15L STD	8-10cm	3m	5m L
10No.	BET PEN	Betula pendula	C.G.	25L STD	8-10cm	7m	14m L
3No.	CAT AUR	Catalpa bignonioides "Aureus"	O.G.	STD	8-10cm	6m	8m M
6No.	CRA MON	Crataegus monogyna	O.G.	STD	8-10cm	13m	10m H
1No.	FAG SYL	Fagus sylvatica	C.G.	25L STD	8-10cm	15m	20m M
4No.	POP TRE	Populus Tremula	O.G.	STD	8-10cm	15m	12m H
1No.	PRU PAD	Prunus padus	O.G.	STD	8-10cm	9m	12m M
6No.	PRU AMA	Prunus "Amanogawa"	O.G.	STD	8-10cm	8m	6m M
4No.	QUE ROB	Quercus robur	C.G.	25L STD	10-12cm	25m	20m H
1No.	SAL ALB	Salix alba	O.G.	STD	8-10cm	30m	24m H
8No.	SOR AUC	Sorbus aucuparia	O.G.	STD	10-12cm	12m	15m M

HEAVY STANDARD TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX Ht	WD
3No.	FAG SYL	Fagus sylvatica	R.B.	HVYSTD	12-14cm	15m	20m M

EXTRA HEAVY STANDARD AND SEMI MATURE TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX Ht	WD
15No.	TIL COR	Tilia cordata	R.B	XHVYSTD	14-16cm	17m	22m M

CONIFEROUS TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX Ht	WD
9No.	Pin syl	Pinus sylvestris	R.B.	CON	250-300cm	7m	20m M

MULTI-STEM TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX Ht	WD
1No.	BET NIG	Betula nigra	R.B.	MUL	200-250cm	6m	13m L

ORNAMENTAL HEDGE PLANTING

QTY	CODE	PLANT NAME	STOCK	SPACING	SHC	DFB
192m		Hedge type 05 Single row				
576No.	Pru Ott	Prunus laurocerasus "Otto Luyken"	C.G	3L 3/m	B	
14m		Hedge type 08 Single row				
42No.	Euo Aur	Euonymus japonicus "Aureopictus"	C.G.	3L 3/m	C	
130m		Hedge type 16 Single row				
650No.	Euo Jea	Euonymus japonicus "Jean Hugues"	C.G.	2L 5/m	B	

NATIVE HEDGE MIXES

QTY	%	PLANT NAME	STOCK	SPACING	SIZE	DFB	MAX HT	W
36lm		Native hedge mix 01: double staggered row						
864No.	30%	Crataegus monogyna	O.G.	WHP	6/m	60-90cm	13m	10m H
443No.	20%	Corylus avellana	O.G.	WHP	6/m	60-90cm	4m	6m L
221No.	10%	Rosa canina	O.G.	WHP	6/m	60-90cm	2.3m	D M
443No.	20%	Viburnum opulus	O.G.	WHP	6/m	60-90cm	4m	5m M
221No.	10%	Cornus sanguinea	O.G.	WHP	6/m	60-90cm	2.5m	3m M
221No.	10%	Euonymus europaeus	O.G.	WHP	6/m	60-90cm	6m	8m M

PLANT MIXES

QTY	%	PLANT NAME	STOCK	SPACING	SIZE	DFB	MAX HT
117m2	GUND	COVERT MIX A (individual species to be planted in groups of approx 20)					
5No.	10%	Hebe rakaiensis	C.G.	3L	3/m2		
10No.	20%	Euonymus "Emerald & Gold"	C.G.	3L	3/m2		
15No.	30%	Lonicera "Maygreen"	C.G.	3L	3/m2		
20No.	40%	Rosa grouse	C.G.	3L	3/m2		
970m2	SUB CANOPY MIX B	(individual species to be planted in groups of 5-10)					
194No.	20%	Crataegus monogyna	O.G.	WHP	1/m2	60-90cm	13m 10m H
194No.	20%	Viburnum opulus	O.G.		1/m2	60-90cm	4m 5m M
97No.	10%	Rhamnus catharitica	O.G.		1/m2	60-90cm	4m 5m M
97No.	10%	Sambucus nigra	O.G.		1/m2	60-90cm	4.5m F
97No.	10%	Cornus sanguinea	O.G.		1/m2	60-90cm	2.5m 3m M
97No.	10%	Corylus avellana	O.G.		1/m2	60-90cm	4m 6m L
49No.	5%	Pyrus pyraster	O.G.	FTH	1/m2	125-150cm	8m 10m M
49No.	5%	Malus sylvestris	O.G.	FTH	1/m2	125-150cm	8m 10m M
49No.	5%	Prunus spinosa	O.G.	FTH	1/m2	125-150cm	6m 8m M
49No.	5%	Prunus cerasifera	O.G.	FTH	1/m2	125-150cm	6m 7m M

42m2 MARGINAL PLANTING MIX

50No.	20%	Mentha aquatica	plug 6/m2
50No.	20%	Filipendula ulmaria	plug 6/m2
25No.	10%	Myosotis palustris	plug 6/m2
25No.	10%	Cultha palustris	plug 6/m2
50No.	20%	Iris pseudocorus	plug 6/m2
25No.	10%	Centaura nigra	plug 6/m2
25No.	10%	Lythrum salicaria	plug 6/m2

31m2 EMERGENT PLANTING MIX

37No.	20%	Butomus umbellatus	plug 6/m2
37No.	20%	Filipendula ulmaria	plug 6/m2
37No.	20%	Persicaria amplexicaulis	plug 6/m2
37No.	20%	Lythrum salicaria	plug 6/m2
37No.	20%	Phalaris arundacea	plug 6/m2

SEED MIXES

AREA SEED MIX NAME

2319m2 Amenity grass mix ("EGG2" Mix by Emorsgate Seeds, refer to Measured Works schedule)

6061m2 Wildflower meadow mix ("EM2" Mix by Emorsgate Seeds, refer to Measured Works schedule)

419m2 Wet Wildflower mix ("EM9" Mix by Emorsgate Seeds, refer to Measured Works schedule)

1184m2 Area to be turfed ("Medallion" by Rowlawn Ltd, refer to Measured Works Schedule)

NOTES AND ABBREVIATIONS:

R.B. = Rootballed stock
C.G. = Container grown stock
O.G. = Open ground stock, to be planted Nov 1st - March 1st
HYH = Feathered tree
STD = Standard tree
HVYSTD = Heavy Standard tree
XHVYSTD = Extra Heavy standard tree
BLE = Broad Leaf Evergreen
CON = Conifer
L = Litre container
DFB = "Distance from Buildings" based on minimum building foundation depths
Max Ht = "Maximum Height" of tree
WD = "Water Demand" of tree
SHC = Shrub Height Classification
A = < 600mm max height
B = 600mm - 1.5m mature height
C = > 1.5m mature height with low water demand and slow growth
D = 1.0m - 3m mature height
E = 3m - 5m mature height
F = >5m mature hopes
Note