THE QUEEN'S AWARDS FOR ENTERPRISE: INNOVATION 2016

Ground Control
Caring for our Environment

**Ground Control Limited**
Kingfisher House
Radford Way, Billericay
Essex, CM12 0EQ

T: 01277 650 697
F: 01277 630 746
E: info@ground-control.co.uk
www.ground-control.co.uk

# Quotation

**Date**
**Our ref: 475089**

FAO: **Jessica Townsend**

Your ref: MA2106178
Keys Group
Postland House
Hulls Drove
PE6 0JU

Dear name,

## Quote specification and costing:

**Area 1: Ivy Control & Tree Works**

1. To supply a suitably competent and qualified team to undertake a programme of tree works and associated works as set out below.
2. T1 – Acer pseudoplatanus is growing within close proximity of the buildings roofline to the south west corner as marked on attached plan. This requires limb reduction works to cut away from the building and provide a minimum clearance of 3m. Cut material will be lowered to ground level using free fall techniques into a clearly defined drop exclusion zone. Works undertaken by climbing arborists using rope and harness climbing access.
3. T2 – Tilia cordata is out growing its location with the crown almost touching the building. Site manager Sally Jackson requested this to be felled to as close to ground level as possible rather than crown reduced due to its location with rear garden area. Team will sectionally dismantle the tree and apply eco plug stump treatment to remaining stump.
4. T3 – Robinia pseudoacacia to the south side of the site access has an extreme growth habit due to canopies of other trees and presents a hazard to the parking area due to its growth form. Recommend this is felled to ground level while arborists are on site.
5. Item E on plan – stumps from previous tree works to be cleared of regrowth, cut lower if possible and treated with eco plug stump treatment to control future regrowth.
6. Removal of all resultant green waste from site.


Simon Wiggins
Contracts Manager
07710 166746
simon.wiggins@ground-control.co.uk

**Enclosed**: Supporting evidence – map and site visit photographs
Qu

# Supporting evidence

**Map:**
I attach a site plan, taken from Google, with pins to mark the areas where each of the quoted works outlined will take place.

**T1, T2, T3 – tree works**
**A, B, C – Ivy**
**D – Strimming**
**E – Stump control**

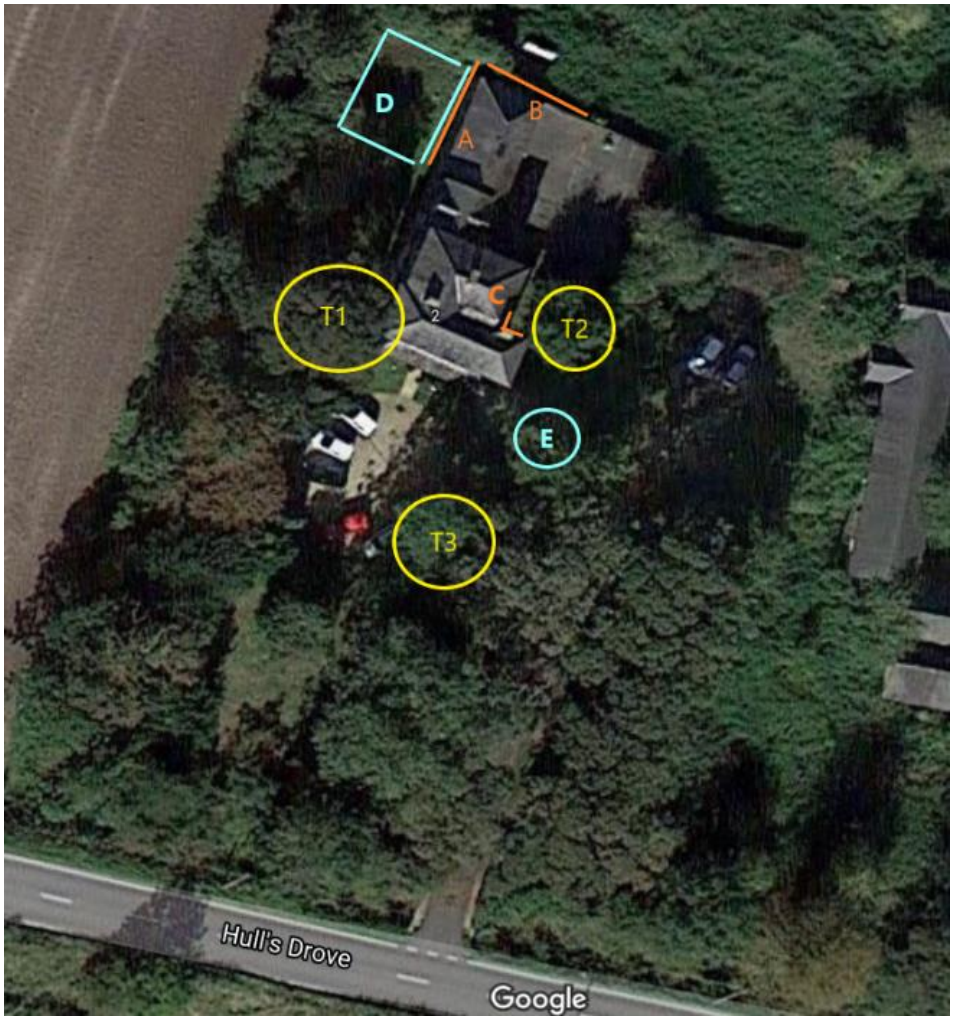

## Site visit photographs:

Photographs taken on my site visit are also attached below and refer to each area in turn.

**Area 1**

**T1 – Acer pseudoplatanus**





**T2 – Tilia cordata**



**T3 – Robinia pseudoacacia**



**Item E – stumps to clear regrowth, cut lower if possible & eco plug**

