
EnergyPlus Casement **window**

Outward opening, internally beaded*

Vertical Cross Section

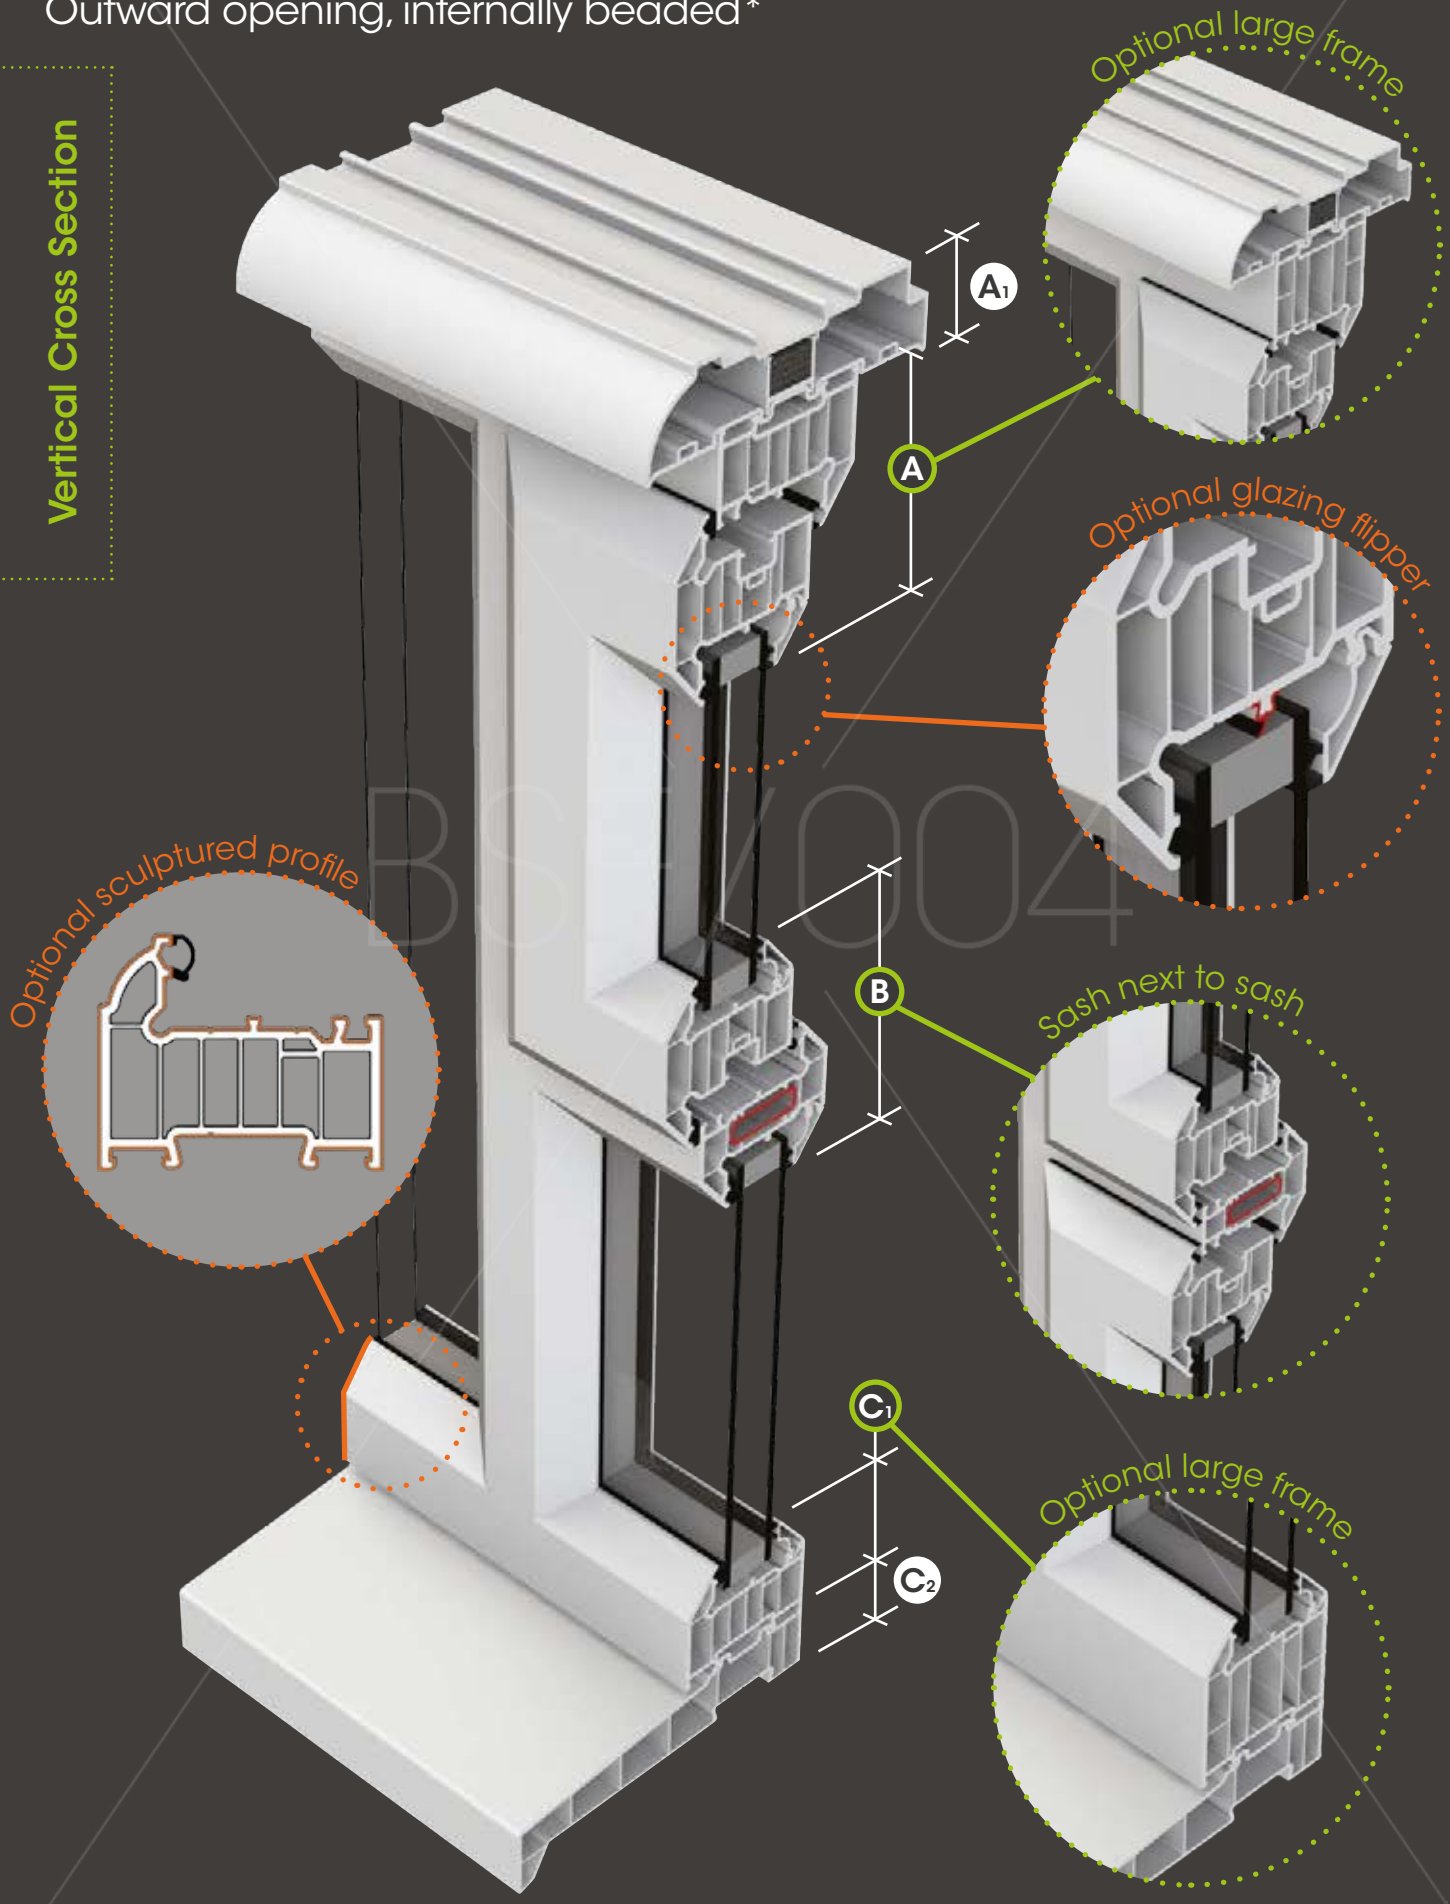

BOF004

** externally beaded options are also available and feature the same sightlines*

Technical information

EnergyPlus Casement window

- Sculptured and chamfered suites
- 28mm double and 36mm triple glazing
- Multi chambered EnergyPlus profiles
- U-values from 1.2 (DGU) and 0.8 (TGU)
- Patented co-ex gasket

Accreditations

Colour Options



Additional colours are available to order as specials.
The colours shown in this brochure give an indication only.



Product	Dim. A_1
Head vent LHV30 & LHV31	30mm
Optional for all Liniar products	

Product	Dim. A
Small frame & sash L#W012 & L#W033	104mm
Large frame & sash L#W017 & L#W033	124mm

Product	Dim. B
Transom & sash L#W022 & L#W033	114mm
Int. transom & sash L#W027 & L#W033	134mm
Transom & 2 x sash L#W021 & 2 x L#W033	161mm
Int. transom & 2 x sash L#W026 & 2 x L#W033	181mm

Product	Dim. C_1
Small frame L#W012	57mm
Large frame L#W017	77mm

Product	Dim. C_2
85, 150, 165, 180 cills LSL085, LSL150, LCL165, LSL180	30mm

 # Replace notation with (C) for Chamfered suite or (S) for Sculptured suite