
© COPYRIGHT DEREK MORRIS
do not scale this drawing



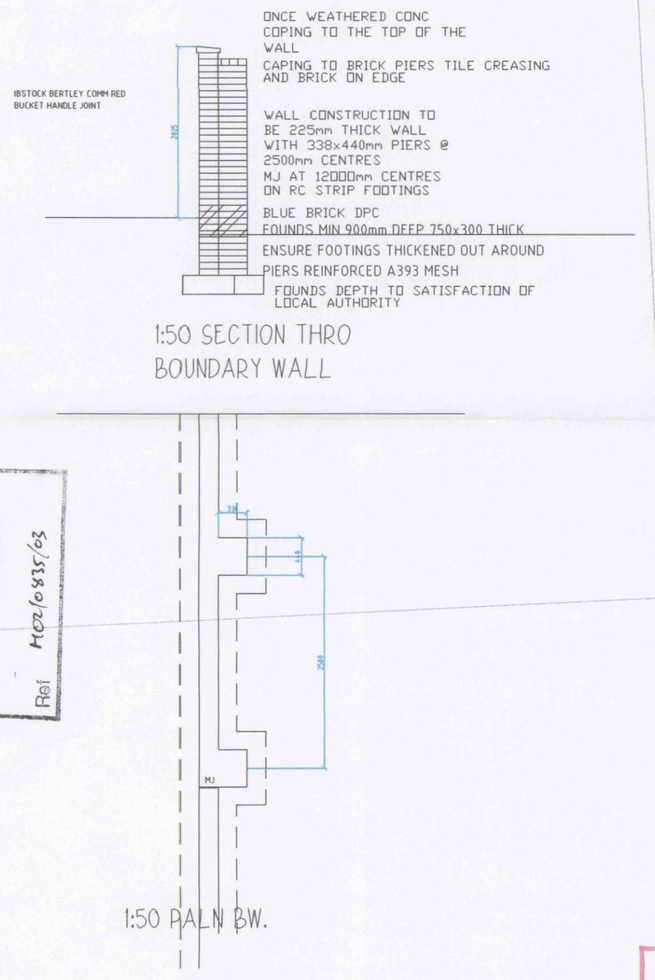

ONCE WEATHERED CONC COPING TO THE TOP OF THE WALL

CAPING TO BRICK PIERS TILE CREASING AND BRICK ON EDGE

WALL CONSTRUCTION TO BE 225mm THICK WALL WITH 338x440mm PIERS @ 2500mm CENTRES MJ AT 12000mm CENTRES ON RC STRIP FOOTINGS

BLUE BRICK DPC

FOUNDS MIN 900mm DEEP 750x300 THICK

ENSURE FOOTINGS THICKENED OUT AROUND PIERS REINFORCED A393 MESH

FOUNDS DEPTH TO SATISFACTION OF LOCAL AUTHORITY

1:50 SECTION THRO BOUNDARY WALL

1:50 PALN BW.

SHDC Planning & Development
- 8 SEP 2003
Ref H02/0835/03

DETERMINED PLAN

REVA 040903 BRIK AND JOINT NOTE ADDED

CLIENT + LCS PROPERTY LTD
PROJECT + CROWELAND
DRAWING + NEW GARDEN WALL PLANS ELES & SE(
JOB NUMBER + 2313 DRAWING NUMBER + 2313-06
SCALE + 1=100 REVISION + A

DEREK MORRIS + ARCHITECTS
7 MALT KILN ROAD + FENTON + LINCOLN + LN1 2EW
TELEPHONE + 01427-718910 FAX + 01427-718911