

© COPYRIGHT DEREK MORRIS
do not scale this drawing



TAKE DOWN EXTG TREE AND
REMOVE ROOTS AND BACKFILL
WITH EXTRACTED MATERIAL
TAKE DOWN AND REMOVE EXTG
TIMBER SHED.
REMOVE OLD DWARF GARDEN WALLS
TAKE UP EXTG PATH TO THE SIDE OF THE
HOUSE LAY NEW FOUL DRAIN RELAY
NEW 900mm x 600mmPRECAST CONC
PAVING SLABS TO CREAT A 900mm
WIDE PATH WTIH GRAVELINFILL TO
BOTH THE HOUSE SIDE AND BETWEEN
THE NEW WALL PIERS.
EXTG TIMBER GATE REMOVED AND REPLACED
BY CLIENT
EXTG BRICK PAVERS TO DRIVE TO REMAIN
AND MUST BE LEFT AS FOUND ANY
DAMAGED TO BE REPLACED AND ALL
TO BE LEFT CLEAN AND TIDY
REMOVE EXTG 150mm FOUL
DRAIN AND LAY NEW 150mm UPVC FOUL
DRAIN CONSRUCTING TWO NEW MANHOLES
THE SHALLOWER OF THE TWO CAN BE
A PLASTIC INSPECTION CHAMBER BASE
AND RISER WITH LIGHTWEIGHT COVER
THE DEEPER MANHOLE TO BE CONSTRUCTED
IN 215 mm CLASS 'B' SEMI ENGINEERING BRICK
MANHOLE FITTED WITH 450x600
HEAVY DUTY COVER
OUTFLOW TO CONNECT TO THE EXTG
OUTGOING DRAIN
ALL NEW PIPES TO BE FLEXIBLY JOINTED
AND BEDDED AND SURROUNDED IN PEA
GRAVEL.
FALL ON DRAIN 1:19

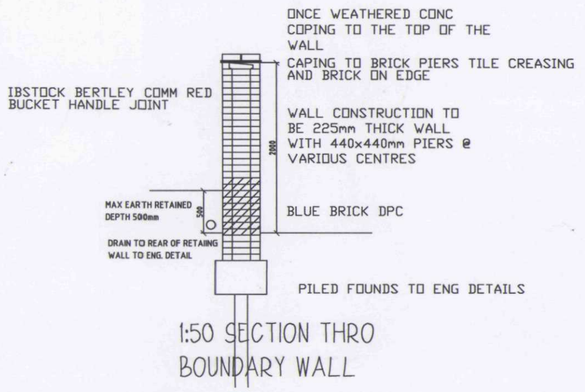

1:50 SECTION THRO
BOUNDARY WALL



REINFORCED 500mm WIDE
CONC. STRIP TO WALL ALL TO ENG DETAIL
MJ. TO ENG DETAIL

1:50 PLAN BW.

SHDC
Planning & Development
29 APR 2004
Ref: 0835/03

AMENDED PLAN
Ref. A2

CLIENT + LCS PROPERTY LTD
PROJECT + CROWELAND
DRAWING + NEW GARDEN WALL PLANS ELES & SEC
JOB NUMBER + 2313 DRAWING NUMBER + 2313-09
SCALE + 1=100 REVISION + A

DEREK MORRIS + ARCHITECTS
7 MALT KILN ROAD + FENTON + LINCOLN + LN1 2EW
TELEPHONE + 01427-718910 FAX + 01427-718911