
ECLIPSE
PVC-U WINDOW AND DOOR SYSTEMS

TYPICAL BAY ARRANGEMENTS


1. ANGLED BAY

24mm Sealed units shown.

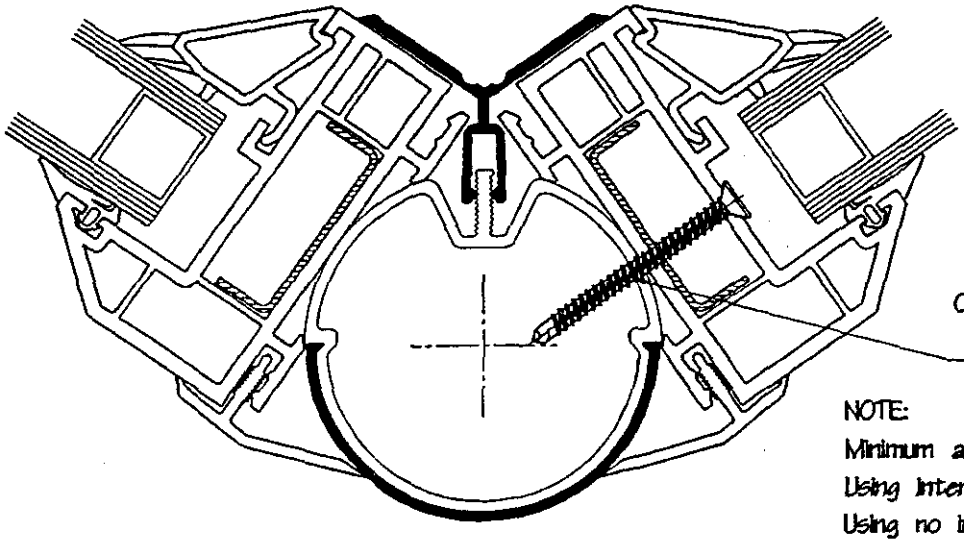

NOTE:
Minimum angles :-
Using internal bay cover = 112°
Using no internal cover = 103°

BAY POLE ARRANGEMENT
Vertical loading @ 1500mm high : 2.1 Tonnes

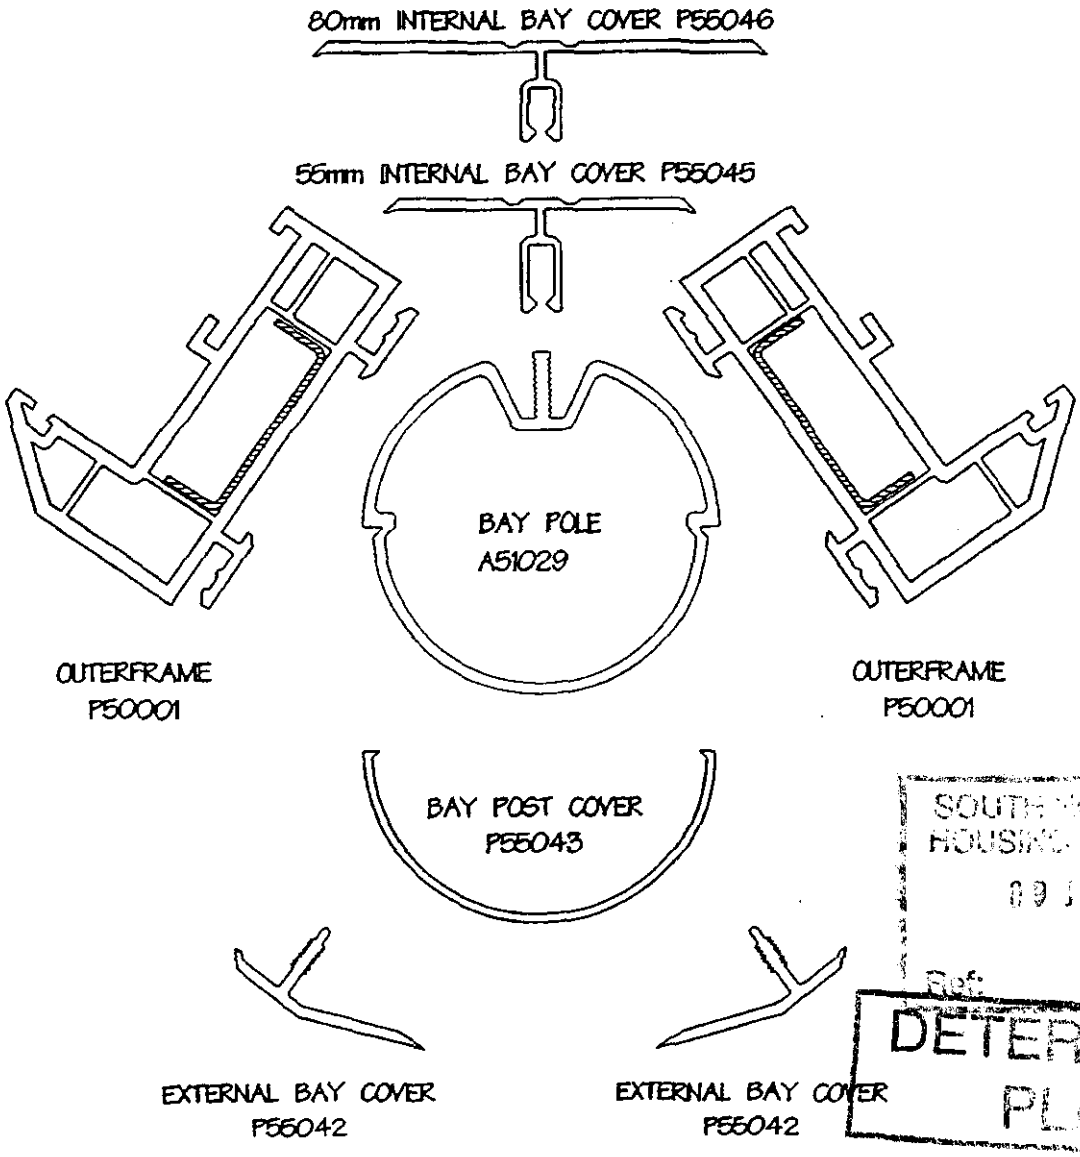


SOUTH [illegible] AND DC
HOUSING & PLANNING
09 JUN 1999
Ref.
DETERMINED
5.5.8.0896
PLAN

TYPICAL CASEMENT WINDOW ARRANGEMENTS

ECLIPSE
PVC-U WINDOW AND DOOR SYSTEMS

EXTERNAL BEADING :


GLAZING BEADS AND GASKETS TO SUIT 24mm UNITS

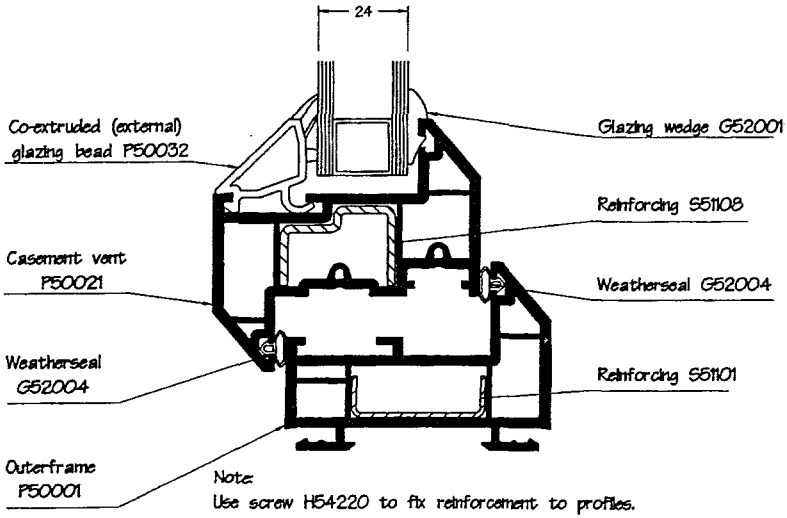

Note:
Use screw H54220 to fix reinforcement to profiles.

INTERNAL BEADING :

GLAZING BEADS AND GASKETS TO SUIT 24mm UNITS

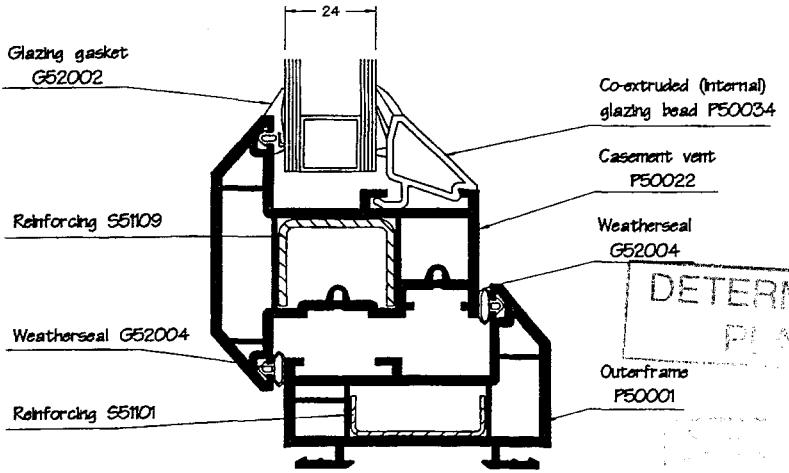

Note:
Use screw H54220 to fix reinforcement to profiles.


DETERMINED
PLAN

ECLIPSE


PVC-U WINDOW AND DOOR SYSTEMS

GENERAL ARRANGEMENT
CASEMENT WINDOWS (EXTERNALLY BEADED)

50mm OUTERFRAME

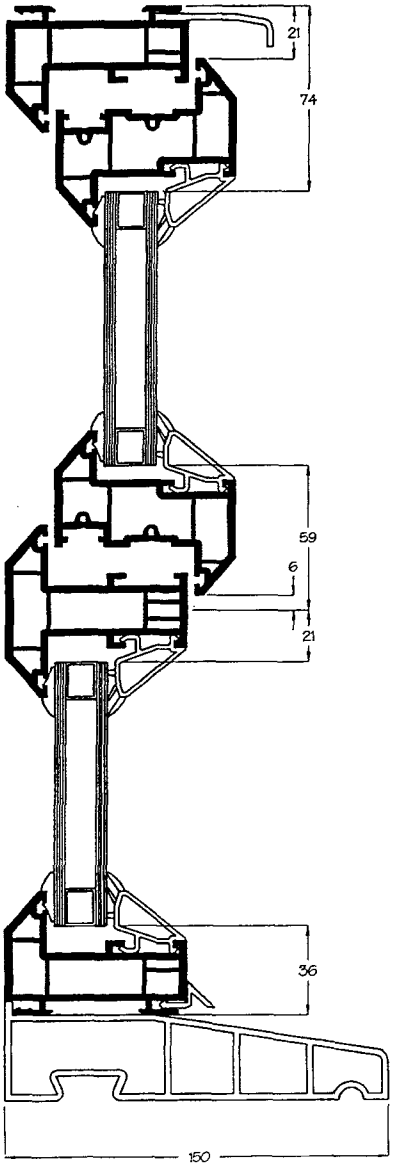

70mm OUTERFRAME

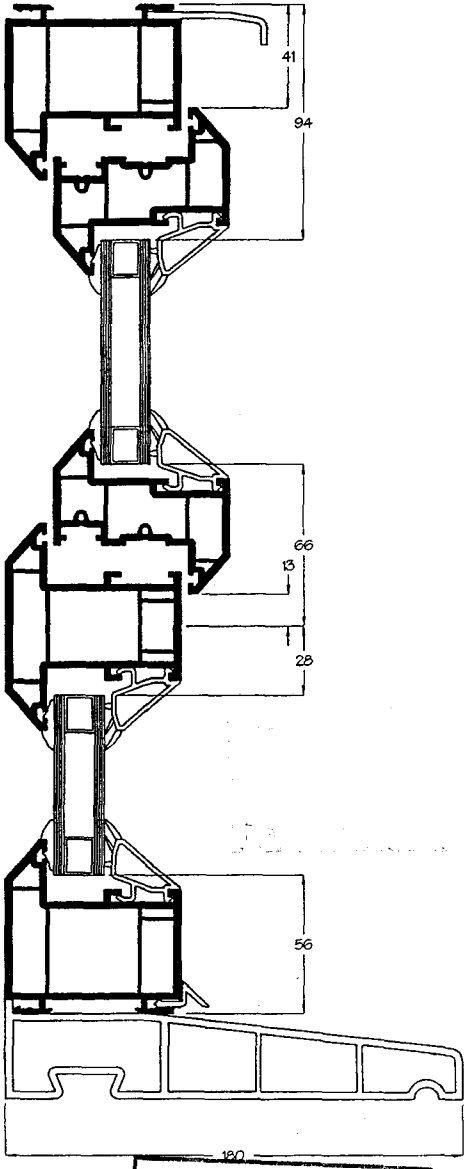

All dimensions are in mm.

DETERMINED
PLAN
A. 195