Conservation Roof Windows

For traditional buildings







CONSERVATION ROOF WINDOWS

When planning dictates that a window of traditional appearance is required, conservation roof windows should be considered. All of our conservation roof windows have the same superior technological features of a VELUX roof window but in a traditional black conservation style.

- Available in either Centre-Pivot or Top-Hung.
- Black external profiles and glazing bar. RAL colour 9005.
- Recessed installation for slate and tiled roofs.
- Top-Hung roof windows listed below are suitable for emergency escape.
- Other sizes and glazing options available – contact VELUX® for further information.

CENTRE-PIVOT




Recessed into slate	20°-90°
Plain tiles	25°-90°
Tiles	15°-90°
Recessed into tiles	20°-90°

TOP-HUNG



Recessed into slate	20°-55°
Plain tiles	25°-55°
Tiles	15°-55°
Recessed into tiles	20°-55°

For roof pitches of 55°-75°, please specify special springs when ordering.

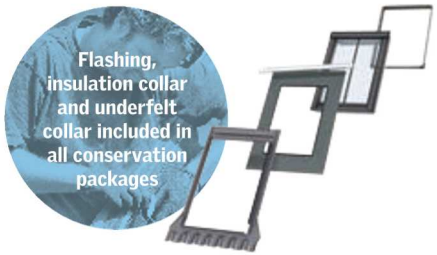

10 YEARS GUARANTEE

ON WINDOWS AND FLASHINGS

REGISTER AT WWW.VELUX.CO.UK/ GUARANTEE

Conservation Roof Windows

(Other sizes of conservation roof windows are available subject to lead times.)

External frame size (nominal w x h) cm		55x98	55x118	66x118	78x118	78x140	134x98
Code	**Description**	**CK04**	**CK06**	**FK06**	**MK06**	**MK08**	**UK04**
Packages include: GGL Centre-Pivot or GPL Top-Hung roof window with glazing bar, flashing, insulation collar (BDX) and underfelt collar (BFX).							
Centre-Pivot roof windows, pine. Toughened outer pane (--50). U-value 1.3 W/m²K.							
GGL SD5N1	GGL 3550 roof window + EDN recessed flashing for slate up to 8mm thick (min 20° roof pitch)	£426	£442	£483	£545	£586	£709
GGL SD5P1	GGL 3550 roof window + EDP flashing for plain tiles up to 14mm thick (min 25° roof pitch)	£383	£398	£435	£495	£533	£648
GGL SD5W1	GGL 3550 roof window + EDW flashing for tiles up to 120mm in profile (min 15° roof pitch)	£398	£414	£452	£512	£551	£670
GGL SD5J1	GGL 3550 roof window + EDJ recessed flashing for tiles up to 90mm in profile (min 20° roof pitch)	£426	£442	£483	£545	£586	£709
Top-Hung roof windows, pine. Toughened outer pane (--50). Suitable for emergency escape. U-value 1.3 W/m²K.							
GPL SD5N1	GPL 3550 roof window + EDN recessed flashing for slate up to 8mm thick (min 20° roof pitch)	-	-	-	-	£704	-
GPL SD5P1	GPL 3550 roof window + EDP flashing for plain tiles up to 14mm thick (min 25° roof pitch)	-	-	-	-	£651	-
GPL SD5W1	GPL 3550 roof window + EDW flashing for tiles up to 120mm in profile (min 15° roof pitch)	-	-	-	-	£669	-
GPL SD5J1	GPL 3550 roof window + EDJ recessed flashing for tiles up to 90mm in profile (min 20° roof pitch)	-	-	-	-	£704	-

Recessed Flashings

Recessed flashings provide a sleek, streamlined finish as the window is installed deeper into the roof structure (see image), meaning that less of the window protrudes above the roofline. The EDN and EDJ flashings also include a BDX insulation collar and BFX underfelt collar and are recommended by VELUX® for optimum energy efficiency.

Our full range of recessed flashings are available as part of our conservation roof window packages and help you to comply with local conservation requirements.



Grey glazing bars available for standard VELUX roof windows

Optional glazing bars for standard VELUX Roof Windows

The requirements from conservation officers throughout the country differ and the black finish featured on our conservation roof window packages may not be required in your area.

Consult your local conservation officer to see if you can create a traditional appearance by adding a glazing bar to a standard VELUX roof window with grey exterior. This will allow you to take advantage of more window styles and sizes available.

As with our standard conservation roof window, a more traditional appearance can also be achieved by installing the window deeper into the roofline with the use of VELUX recessed flashing kits (pages 38-41). Recessed flashing kits also have the advantage of providing a greater insulating value for a more energy efficient installation.



TO CREATE YOUR GREY CONSERVATION PACKAGE:

- Select your preferred VELUX roof window. This includes white polyurethane, pine and all operating methods (pages 18-23).
- Choose a flashing kit suitable for your specific roof pitch and roofing material – a recessed flashing kit is recommended (pages 38-41).
- Use VELUX installation products for optimum energy efficiency (pages 36-37).
- Add one or more conservation glazing bars in the corresponding size to your window.

Grey glazing bar to match grey exterior (nearest RAL 7043) finish of standard VELUX roof windows.

VELUX® recommend the use of two glazing bars for our wider windows such as SK06, UK04 and UK08.

	55x78	55x98	78x98	134x98	55x118	66x118	78x118	114x118	78x140	94x140	134x140	94x160
Optional glazing bars for standard windows	**CK02**	**CK04**	**MK04**	**UK04**	**CK06**	**FK06**	**MK06**	**SK06**	**MK08**	**PK08**	**UK08**	**PK10**
2 glazing bars for SK06, UK04 & UK08	ZGA WK02 0024 £20	ZGA WK04 0024 £22			ZGA WK06 0024 £24				ZGA WK08 0024 £26			ZGA WK10 0024 £28

- Glazing bars are not available for --66 and --62 glazing variants.
- All windows and glazing bars have a delivery time of 2 days.
- Delivery time is in working days from receipt of orders placed before 4pm.