



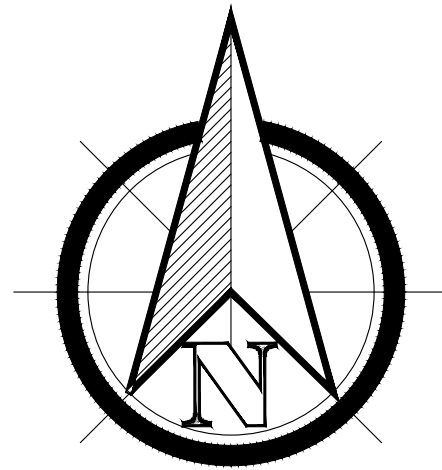


See Drawing 437.LD.01

See Drawing 437.LD.04


KEY




Existing tree/ landscaping to be retained




Proposed Tree




Proposed hedge




Proposed shrub planting




Specimen Shrub




600mm x 600mm buff riven paving slabs to rear




2 x 600mm x 600mm buff riven paving slabs to front




Patios




Light Grey Block Paving



Charcoal Block Paving



Bin 'laydown' Areas



Root protection barrier Refer to drawing 437-S11-SI-DR-C-8101 and 437-S11-SI-DR-C-9100

TREES

Species	Girth	Type	Overall Height	Root Condition	No.
MP Malus Profusion	12-14	BRx2	400-500	Bare Root	3
Phs Prunus hillien Spire	12-14	BRx2	400-500	Bare Root	8
Lo Liquidambar Orientalis	12-14	BRx2	400-500	Bare Root	4
QR Quercus Robur	12-14	BRx2	400-500	Bare Root	1

GENERAL PLANTING

Species	No. Breaks	Type	Overall Height	Root Condition	No.
HbWG Hebe brachysiphon 'White Gem'	5-7	3L	15-30	Container	12

Specification Notes:

1. General Notes

- All planting and seeding to be carried out to BS 3936.

2. Tree Planting

- Excavate tree pits to the following sizes:
 - Semi mature trees - 2100 x 2100 x 900mm depth
 - Extra heavy standard trees - 1500 x 1500 x 900mm depth
 - Heavy standard trees - 1500 x 1500 x 900mm depth
 - Standard trees - 900 x 900 x 900mm depth
- Retain topsoil for re-use and remove subsoil from site to designated subsoil heaps.
- Backfill trees with 80 litres of tree planting compost incorporated into topsoil.
- Tree support - Semi-mature, Extra heavy standard and Heavy standard trees to be supported by means of underground guying. Rootballed standard trees to be double staked and bareroot standard trees to be single staked. All trees to be secured to tree stakes with appropriate tree ties and spacers.
- Mulch trees to 75mm depth with 'Bark Nuggets' over area of tree pit.
- Check stakes, ties and spacers regularly to prevent damage to tree trunks and remove when trees are judged to be well established and self supporting.

3. Hedge Planting

- Cultivate 500mm wide strip 300mm deep and plant in a single row unless otherwise stated at the spacings specified in the plant schedule.

4. Groundcover and Shrub Planting

- Cultivate all shrub planting areas to a depth of 300mm and plant shrubs in positions shown.
- Mulch shrub beds with 75mm 'Bark Nuggets'.
- Maintain all planting areas in a weed free condition by appropriate herbicide treatment as necessary until ground is covered by new planting. Hand weed tall weeds as necessary and maintain a tidy appearance.

5. Grass Seeded Areas

- Cultivate to a depth of 150mm and prepare ground in accordance with specification. Sow seed mix Johnsons' 'J4' grass seed mix at a rate of 25g/sq.m.

F	28.07.2019	JMG	Landscaping amended at Client request subject to planning approval.
E	11.03.2019	JMG	Landscaping amended for technical approval.
D	18.11.2019	LR	Attenuation pond design amended to suit Civil Engineers design.
C	03.09.2019	LR	Plot 4P amended to Altwick House type.
B	22.07.2019	LR	Tree planting amended to include Quercus Robur
A	15.03.2019	LR	Chevelley house type and associated landscaping amended
REVISION	DATE	DRAWN	DESCRIPTION

THE BOATHOUSE, HARBOUR SQUARE,
NENE PARADE, WISBECH,
CAMBRIDGESHIRE. PE13 3BHT: 01945 467339
E: design@studio11architecture.co.uk
W: www.studio11architecture.co.uk

CLIENT Seagate Homes Ltd

PROJECT Proposed residential development at
Land off James Road, Crowland

DRAWING Landscaping Details 2 of 4

DRAWN LAR	PROJECT DESIGNER LAR	PROJECT DIRECTOR KB
DATE 17.12.2018	SCALE 1:200	PAPER SIZE A1

DRAWING NUMBER 437.LD.P.02

Working in partnership with Ralph Charman Associates & Eleven Consultants