
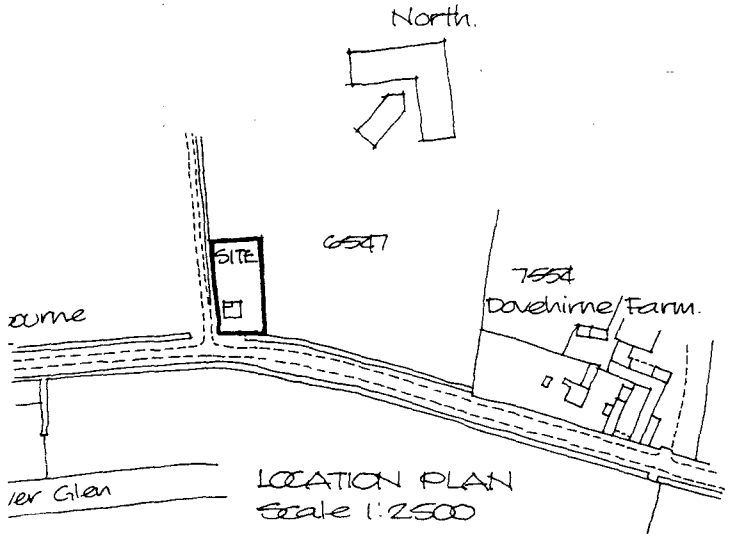


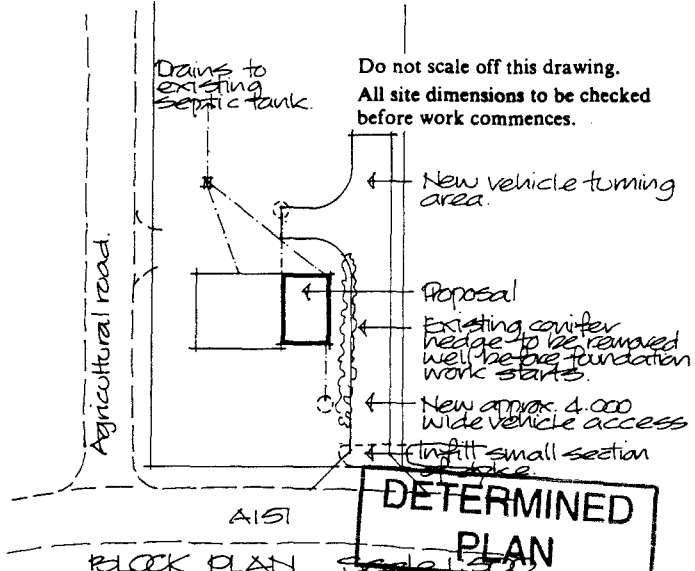

DETERMINED PLAN

AMENDED PLAN
Ref.

05/28/98

Ceilings:

First floor ceilings formed of 9.5mm plasterboard with all edges supported and Artex finish.
Ground floor ceilings formed of 12.5mm plasterboard with all edges supported and Artex finish.

Stud partitions:

New first floor stud partitions formed of 50X75 studs at 400mm ctrs. and 50X75 sole and head plates and noggings at max. 1.200 ctrs.
12.5mm plasterboard cladding to both sides with mineral wool packing between studs.

Open fire:

Install air vent adjacent to fireplace complete with hit and miss ventilator and flyscreen internally to provide adequate combustion air supply to open fire.
Install fireguard fixing points at each side of fireplace.
Chimney to fire to have clay flue liners to BS 1181 225mm dia. or 185mm square installed with sockets uppermost.
No insulation to be installed below hearth.

New walls to be bonded to existing using Furfix wall extension profiles.

EXTENT OF DRG NO 98/34/01A

Above ground drainage: