

Specification Notes:

1. Tree tie and irrigation supplier:
Green Blue Urban Ltd. Northpoint,
Compass Park, Junction Road, Bodiam
TN32 5BS. Tel. 01580 830 800.

2. Stain: Sadolin 'Superdec' Opaque,
Black. Crown Paints Ltd, Crown
House, Hollins Road, Darwen, Lancs
BB3 0BG. Tel. 0330 0240 298

Specimen Tree

Size and species as specified. Fitted with pest protection and strimmer guards where necessary. Refer to proposals.

Watering

RRMC1A: Root Rain Metro irrigation and aeration system with 95mm diameter; black metal cap and retainer chain set just proud of gravel level.

Ensure inlet is installed slightly proud of the final pit surround. (Maximum 50mm)

Tree Pit

Excavate tree pits to a minimum width of 2m x 2m (accommodating entire root mass). Fork sides and base thoroughly to achieve drainage and remove clay patches. Backfilled with tree planting compost and soil mixture. 750mm minimum depth.

Softworks treatment, refer to proposals.

Base of pit

Broken up thoroughly and sides of pit forked to assist root development and drainage. Perforated drainage pipe to be connected into surface water drainage system where necessary. Refer to Engineer's specification.



Double Stub Stake

Tree and rootball firmly fixed to crossbar with twin stake belt and large rubber flat back pad with buckle adjustment.

Crossbar: 100mm x 38mm timber section set 400mm above ground level (low for best stem growth) and firmly fixed to stakes, using 2nr. M8x75mm screws to each stake.

Stake: 75mm square section timber driven firmly into ground either side of the rootball.


All visible timber to be stained, two coats, black to achieve a neat finish.

Bark Mulch

As specified elsewhere, 75mm deep. In grassed areas note extent of mulched area (1500 diam circle) around plant stem.


Topsoil

Backfilled with tree planting compost and soil mixture. Suitable horticultural grade topsoil to be imported as per BS 3882:2015. Should consist of free draining loam - pH 6-7.5. Soils should be free from pernicious weeds, roots, clay lumps, non-soil material, brick and other building materials, foreign matter and chemical contamination.

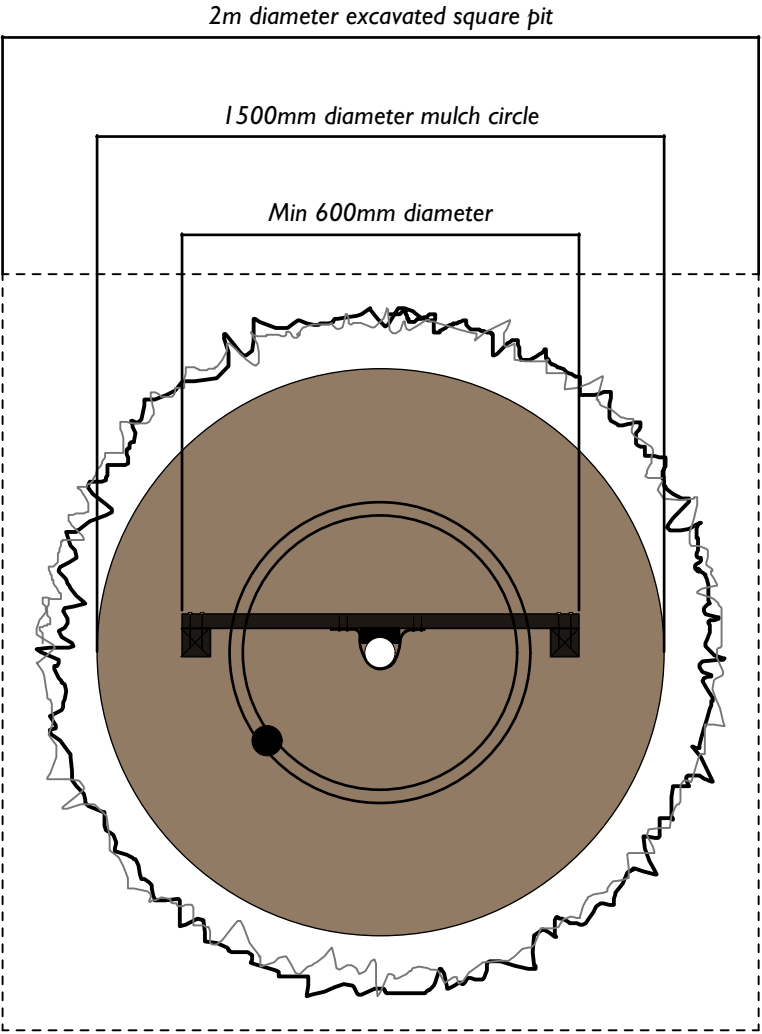

PLAN

SECTION

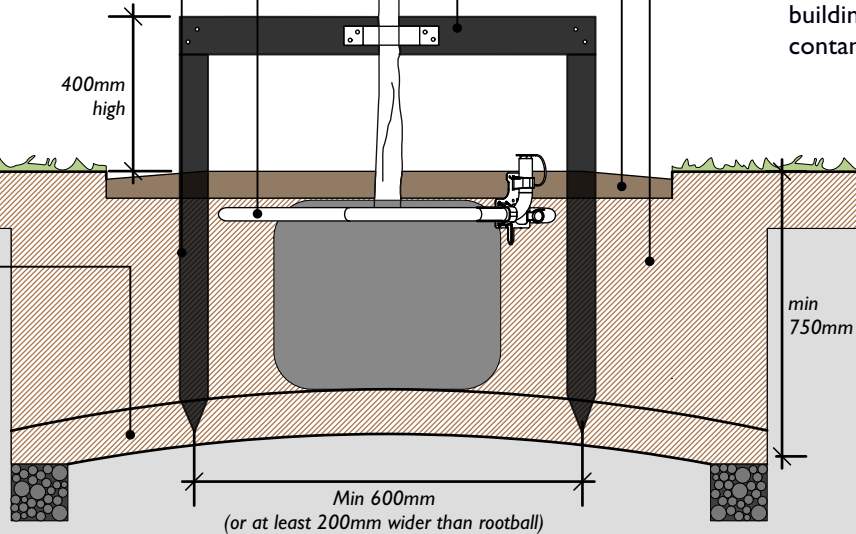

I209 401 -
TYPICAL TREE PIT - in SOFT

All softworks to be carried out in accordance with BS4428: 1989 'Code of practice for general landscape operations (excluding hard surfaces)' and BS 3936 'Recommendations for cultivations and planting in the Advanced Nursery Stock category'. Works should be carried out at the appropriate season and only in appropriate weather conditions.

THE FORMER
PLOUGH, MAIN
ROAD, PEI I 3EN

1:20@A3

REVISIONS:
- Initial Issue: 23rd June 2021.

NOTES:
1. To be read in conjunction with DSA plan drawings.

© DSA 2021 Do not scale the drawing.
Drawing for **PLANNING** purposes ONLY.
dsa-ed.co.uk 0115 981 8745

