

**PROPOSED CONVERSION OF AN EXISTING SHOWROOM TO
RESIDENTIAL AT FEN END LANE, SPALDING, PE12 6AZ**
FLOOD RISK ASSESSMENT



View of site from Fen End Lane

S M Hemmings B Sc C Eng MICE MIWEM,
40 Celta Road
Peterborough
PE2 9JD

This flood risk assessment has been prepared solely to support the planning application for a conversion of a building at Fen End Lane, Spalding. The author has made every effort to provide an accurate assessment of the flood risk but accepts no liability should the information be found to be incorrect or incomplete, or if it is used for any other purposes other than for which it was originally commissioned.

Introduction

A residential development is proposed with the conversion of an existing building presently used as a showroom into a single storey bungalow at the rear of Tidswell Tackle at Burr Lane, Spalding, PE12 6AZ. The site will be accessed from Fen End Lane, as shown on the block plan on page 12 of this report. The site is located on the southern side of Spalding approximately 1 km from the central area.

The site of the proposed development is within Flood Zone 3 as shown on the Environment Agency's Flood Zone map.

The Planning Application requires a flood risk assessment to be carried out as specified in the Practice Guidance to the National Planning Policy Framework Development and Flood Risk. The site is within a defended area as specified on the South Holland District Council's Strategic Flood Risk Assessment (SHDC SFRA) map and is located in the South Holland Internal Drainage Board District.

Environment Agency (EA) Flood Zones

The map below is taken from the Environment agency website and shows the flood zones in this area.



It can be seen that all of the site is in Flood Zone 3.

Application Site

The National Grid Reference of the site is 524255, 320500.

The position and extent of the site is shown on the plan at the end of this document.

Applying the flood risk vulnerability classification in Table 2 of the Guidance, a development consisting of a dwelling house is classified as “more vulnerable”.

As the site is within a defended area the proposed development can be designated to be within Flood Zone 3(a) “High Probability” as detailed on the Environment Agency’s flood zone maps without defences, as defined in Table 1 of the Technical Guidance.

Table 3 of the Guidance is shown on the next page:

<u>Flood Zones</u>	<u>Flood Risk Vulnerability Classification</u>				
	Essential infrastructure	Highly vulnerable	More vulnerable	Less vulnerable	Water compatible
Zone 1	✓	✓	✓	✓	✓
Zone 2	✓	Exception Test required	✓	✓	✓
Zone 3a †	Exception Test required †	X	Exception Test required	✓	✓
Zone 3b *	Exception Test required *	X	X	X	✓*

Therefore it can be seen that for “More vulnerable” development the sequential and the exception tests need to be applied to the development.

Sequential Test

The aim of the Sequential Test, as set out in the Planning Practice Guidance, is to ensure that a sequential approach is followed to steer new development to areas with the lowest probability of flooding. The flood zones as defined in the Strategic Flood Risk Assessment for the area provide the basis for applying the Test. The aim is to steer new development to Flood Zone 1 (areas with a low probability of river or sea flooding). Where there are no reasonably available sites in Flood Zone 1, local planning authorities in their decision making should take into account the flood risk vulnerability of land uses and consider reasonably available sites in Flood Zone 2 (areas with a medium probability of river or sea flooding), applying the Exception Test if required. Only where there are no reasonably available sites in Flood Zones 1 or 2 should the suitability of sites in Flood Zone 3 (areas with a high probability of river or sea flooding) be considered, taking into account the flood risk vulnerability of land uses and applying the Exception Test if required.

The western end of Burr Lane and Fen End Lane is higher than the areas at the eastern end of Burr Lane and can be considered to be at lower flood risk than other areas of Spalding and therefore an appropriate location for residential development.

As this is a conversion of an existing building it is not possible to locate the development at another location. The safety of the development will be delivered by demonstrating that the existing floor level of the building is above the predicted residual flood levels for this area.

The South Holland District Council Core Strategy states that there is a limited number of sites outside the town of Spalding available for residential development. The site of this development can be considered an ideal building for conversion within an existing residential area. There is a requirement for further buildings to be brought forward and used for residential development to enable the Council to meet the RSS and Structure Plan requirement for 2021.

Therefore I consider that the sequential test has been passed.

Strategic Flood Risk Assessment

Consultants have produced a Strategic Flood Risk Assessment (SFRA) for the South Holland District Council (SHDC). This document provides details of the flood risk in the Council's area. Reference to the maps in this document give the following information for the flood risk and hazard at the site.

The maps illustrate the actual flood hazard for the 1% fluvial event and 0.5% tidal event, and for the 0.1% event.

For the present day	Depth of flooding ... zero
	Extent of flooding .. Low or medium flood probability
	Peak Velocity Nil

For year 2115	Depth of flooding ... zero
	Extent of flooding.... Low or medium flood probability
	Peak Velocity Nil

The maps showing the residual flood hazard were revised in the 2016 update of the South Holland District Council Strategic Flood Risk Assessment which can be found on the website of the South East Lincolnshire Joint Planning Committee. The hazards are as follows for the 1% fluvial or 0.5% tidal event probability:

For the present day	Depth of flooding ...zero
	Extent of flooding .. Low
	Hazard rating..... zero.
	Peak Velocity .. zero

For the year 2115	Depth of flooding ... zero.
	Extent of flooding .. Low
	Hazard rating..... zero.
	Peak Velocity .. zero

The hazards are as follows for the 1% fluvial or 0.5% tidal event probability:

For the year 2115	Depth of flooding ... zero.
	Extent of flooding .. Low
	Hazard rating..... zero.
	Peak Velocity .. zero

Figure 16 of the general maps show that the site is not within the rapid inundation zone for the present day and 2115.

Maximum flood level and bank levels in the tidal section of the River Welland

Tables in the SFRA show the following details of the defence bank on the east side of the tidal section of the River Welland north of the A16 road bridge and 7.2km north of the development site, between chainage 19.8km and 20.8km.

	2007	2055	2115
Peak 1 in 200 year extreme tide level	5.98m OD	6.31m OD	7.12m OD
Peak 1 in 1,000 year extreme tide level	6.27m OD	6.60m OD	7.41m OD

With an average defence crest level between 7.80 and 7.90 m OD the freeboards are as follows:

	2007	2055	2115
Peak 1 in 200 year freeboard	1870mm	1540mm	730mm
Peak 1 in 1,000 year freeboard	1580mm	1250mm	440mm

Tables in the SFRA show the following details for the defence bank on the south side of the Coronation Channel between chainage 2.5 km and 3.2 km.

	2007	2115
Peak 1 in 100 year flood level	4.36m OD	4.69m OD
Peak 1 in 1,000 year flood level	4.38m OD	4.69m OD

The bank levels on this section vary between 5.35m OD and 5.9m OD. Therefore it can be seen there is a minimum freeboard of 650mm to the predicted design maximum levels in 2115.

Tables in the SFRA show the following details for the Barrier Bank which is the defence bank on the east side of the fluvial section of the River Welland between chainage 0 km and 1.0 km.

	2007	2115
Peak 1 in 100 year flood level	4.45m OD	4.67m OD
Peak 1 in 1,000 year flood level	4.48m OD	4.68m OD

The bank levels on this section are 6.0m OD. Therefore it can be seen there is a minimum freeboard of 1300mm to the predicted design maximum levels in 2115.

Existing Flood Alleviation Measures

The site is within a defended flood plain, as defined in Appendix 1 of the Environment Agency's "Policy and Practice for the Protection of Flood Plains", which is considered to be passive until such time that a flood greater than the defences can withstand

occurs. The likelihood of flooding occurring due to overtopping or failures of the defences is considered to be very low.

The site is located approximately 4.0 km south of the tidal section of the River Welland, which has a tidal defence bank which is maintained by the Environment Agency.


The site is located approximately 450 metres east of the fluvial section of the River Welland, which is maintained by the Environment Agency.

The site is located approximately 100 metres east of the Barrier Bank.

The site is located approximately 1.2 km from the south bank of the Coronation Channel which is maintained by the Environment Agency.

The internal watercourses in the area are maintained by South Holland IDB.

The section of the River Welland from south of Crowland to the southern outskirts of Spalding has two washlands located on the east side of the River, called Crowland Washlands and Cowbit Washlands. These areas are designed to alleviate very high flows in the River Welland. When the water level in the River Welland reaches a level of approximately 5.00m OD large syphons are activated which discharge excess water onto the Washes. The Barrier Bank is located on the east side of the Washes to contain the water in the Washlands and is the main flood defence bank on the east side of the river.

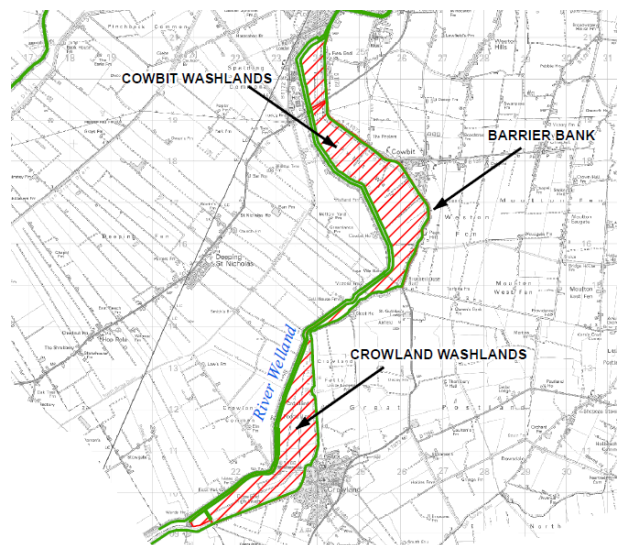

Existing Ground Levels

The level of Barrier Bank at the western end of Burr Lane is approximately 6.10 m OD and Burr Lane slopes eastwards down to a level of approximately 3.30m OD about 70 metres east of the site.

The level of the existing showroom is 3.75m OD, and there is a paved area around all the perimeter of the building at approximately 3.60m OD. The level of Burr Lane north of the bungalow and the showroom is 3.90m OD. The level of Fen End Lane west of the building is at a level of 4.30m OD, and the land between Fen End Lane and the

showroom is approximately 4.10m OD. The floor level of the bungalow is 3.66m OD and the area west of the building behind the bungalow is at approximately 3.40m OD, and slopes down westwards.

All of the levels taken in the survey are shown on the plan on page 12 of this report.

Potential Sources of Flooding

The potential sources of flooding to the site are:-

1. Failure or overtopping of tidal defences of the River Welland or the Wash
2. Failure or Overtopping of the Coronation Channel.
3. Failure or overtopping of the Barrier Bank.
4. High water levels in IDB drainage channels.
5. Localised flooding in the area.

1. Failure or overtopping of tidal defences of the River Welland or the Wash

The nearest tidal defences are the banks of the River Welland north of Spalding, which are 4.0km north of the site.

The SFRA maps indicate floodwater from a breach in the tidal bank in a 1 in 200 year event in 2115 would probably reach the A151 Spalding to Holbeach Road, but not spread any further south.

Therefore this source of flooding can be considered remote and will be adequately mitigated as the existing floor level of the building is 450mm above the estimated 1 in 1000 year flood level in 2115.

2. Failure or Overtopping of the Coronation Channel

The SFRA states that the maximum design level in the Coronation Channel is 4.69m OD. The minimum crest level of the south bank of the Channel is 5.35m OD, which gives a minimum freeboard of 650mm. However, generally there is a freeboard of at least 800mm along this bank of the Channel.

The SFRA does not predict any flooding at the location of the proposed development in a 1 in 1000 year event in 2115.

Therefore this source of flooding will be adequately mitigated as the existing floor level of the building is 450mm above the estimated 1 in 1000 year flood level in 2115.

3. Failure or overtopping of the Barrier Bank

The Barrier Bank is the eastern bank of the Cowbit Washes. The Washes are only flooded in extreme conditions (around 1 in 50 years) and are used the rest of the time as agricultural land. There are two syphons which operate automatically to allow water to flood on to the Washes and alleviate high water levels in the River Welland. When this occurs the level of water in the washes will quickly rise to probably around 4.70m OD.

As the road level on top of the bank is 6.0m OD, there is no possibility of the bank being overtopped along this length of Barrier Bank. The possibility of a breach

occurring in this section of bank is also remote as there is a very shallow back slope to the bank, and there is the road on the top of the bank. There is a greater chance of the bank breaching further south where the bank slopes are steeper.

The SFRA does not predict any flooding at the location of the proposed development in a 1 in 1000 year event in 2115.

Therefore this source of flooding will be adequately mitigated as the existing floor level of the building is 450mm above the estimated 1 in 1000 year flood level in 2115.

4. High Water Levels in IDB drains

Although the whole of this area is below high tide level and levels in the rivers, the retained water levels in the drainage channels ensure that the risk of flooding is extremely low. South Holland IDB maintains a system of sluices, pumping stations, and drainage channels which convey surface water into the River Welland, the Wash and the River Nene to control water levels throughout the South Holland IDB area.

South Holland IDB maintain drainage channels in this area. There is an IDB watercourse approximately 900 metres east of the development site which flows southwards alongside Drain Bank, under both the A16 Bypass and the A16 to Peterborough. It then flows eastwards along the Clowacre Drain to discharge into the Wheatmere Drain (B35) which flows southwards into the South Holland Main Drain (B30). The water level in the South Holland Main Drain is controlled by Wisemans Pumping Station.

Wisemans Pumping Station is operated and maintained in excellent condition by South Holland IDB and the likelihood of flooding due to this source is low. IDB systems are designed to provide a freeboard of between 600mm and 1000mm to all land in a 1 in 10 year return period rainfall event. South Holland IDB watercourses generally state that their watercourses provide a standard of 1 in 100 years with a freeboard of 300mm in urban areas. In an extreme event water levels will rise but this will be a slow process and it would be at least 24 hours before levels were high enough to begin to flood low land in the area, and after this the level of the flood water would need to rise another 1.0 metre before the development site would be affected.

The channels maintained by South Holland IDB in urban areas are classified as high priority watercourses and as such receive a higher maintenance priority.

There are possibilities of failure of outfall sluices, but these are mitigated by the high level of maintenance given to these structures by the IDB. If a failure did occur the IDB would immediately be warned of the problem by their telemetry system and take action to repair the fault or to bring in temporary pumps to reduce the risk of any flooding in the area. Similarly any failures of culverts or other blockages would be dealt with immediately.

Therefore this source of flooding can be considered low and will be adequately mitigated as the existing floor level of the building is 450mm above the estimated 1 in 1000 year flood level in 2115.

5. Localised Flooding in the area

There is an adequate surface water drainage system in Burr Lane and the road also slopes down eastwards and therefore the risk of accumulations of surface water on the site or in Burr Lane is very low.

Similarly Fen End Lane slopes southwards and it is unlikely that any large amounts of surface water would accumulate west of the existing building.

As long as it can be demonstrated that the surface water from the roofs is discharged into suitably designed soakaways then this risk will be adequately mitigated.

Extent of known Flooding

During the preparation of this assessment, no evidence was discovered of the existing house or garden or any of the adjoining properties having been flooded in the past.

Probabilities and Trends of Flooding

The probability of this building flooding from Environment Agency main river is very low. In an extreme event any effect on this location would not be sudden and there would be time for residents to take precautionary measures to limit the impact of any flooding that may occur.

Residual Risk – Extreme Events

The residual risk from extreme events is very low on this site. The major risk to the site is from a breach or overtopping of the tidal defences

The risk of this happening in this case is low and the hazard from any flooding is also low.

Climate Change

The recommendations for flood depths for this flood risk assessment use information mostly taken from the South Holland DC SFRA which was last updated in 2010. The EA have issued new guidance on recommended contingency allowances for predicted sea rises, fluvial flows and rainfall intensities which from 19th February 2016 needs to be considered in the FRA. The effects of these new recommendations are considered in Appendix A of this report (pages 14 to 17). It is concluded that no extra mitigation measures are necessary to comply with the new guidance on climate change.


South East Lincs Advice Matrix

Advice can be found on the recommended mitigation required by referring to a spreadsheet on the South East Lincolnshire website.


As the development is in flood zone 3 and there is no hazard where the new building will be located reference should be made to Category G8 which states that the Environment Agency has “No Comment”

Conclusions


The plan below of predicted residual depths of flooding in the recently updated SFRA do not predict any flooding on the site in a 1 in 100 year fluvial or 1 in 200 year tidal event in 2115.

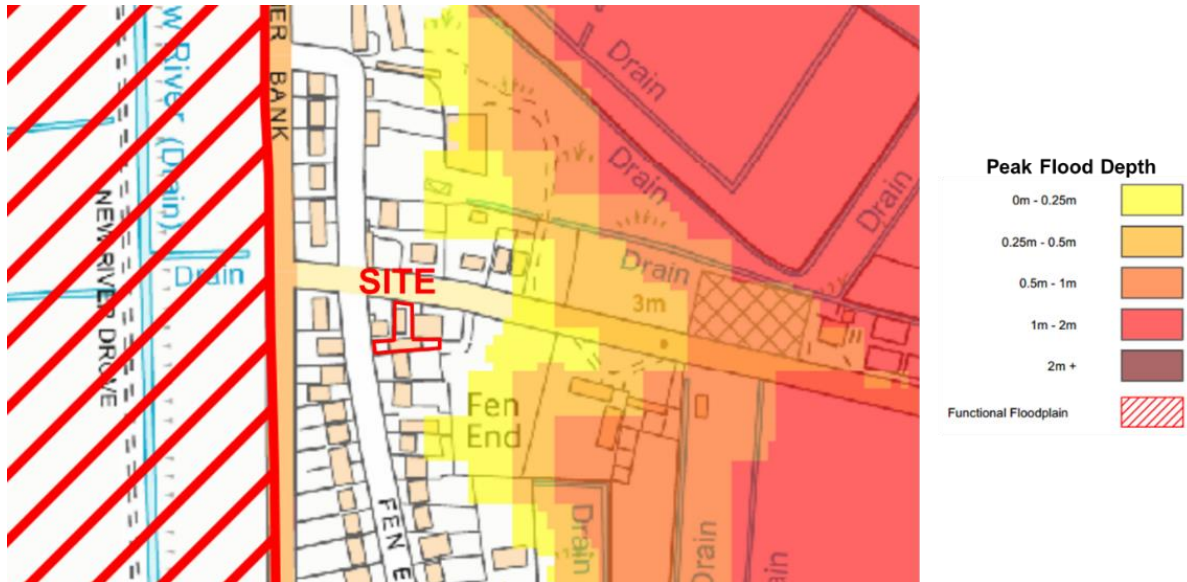

The plan (shown below) of predicted residual depths of flooding in the recently updated SFRA do not predict any flooding on the site in a 1 in 1000 year fluvial or tidal event in 2115.

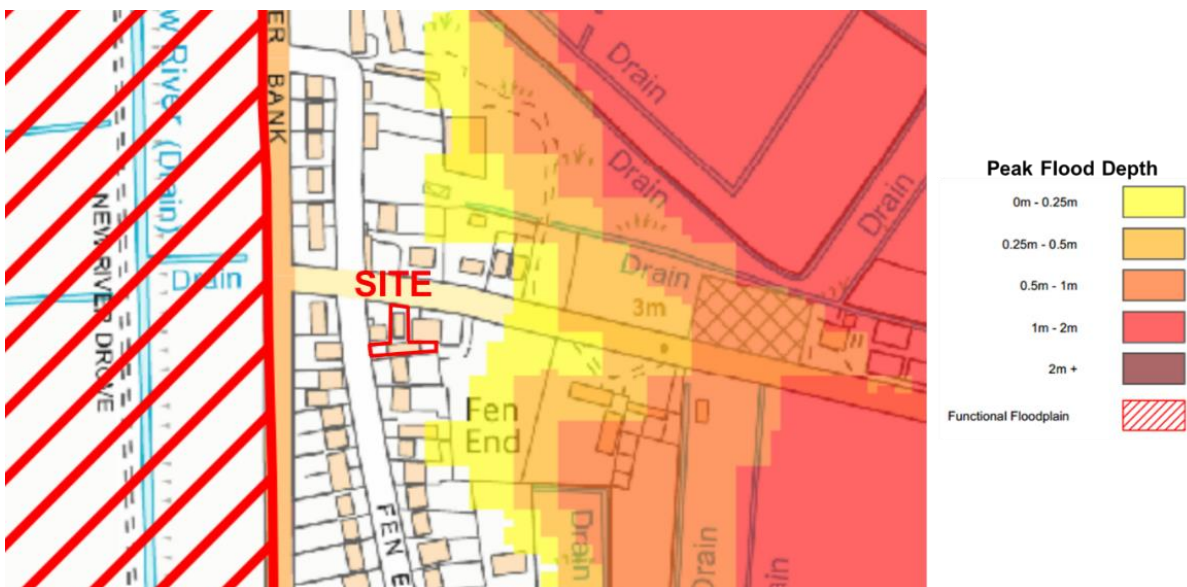

A cross section has been drawn west to east across the site and this is shown on the next page. This section shows how the land levels fall to the east and that the building is 450mm above the predicted 1 in 1000 year flood level in 2115.

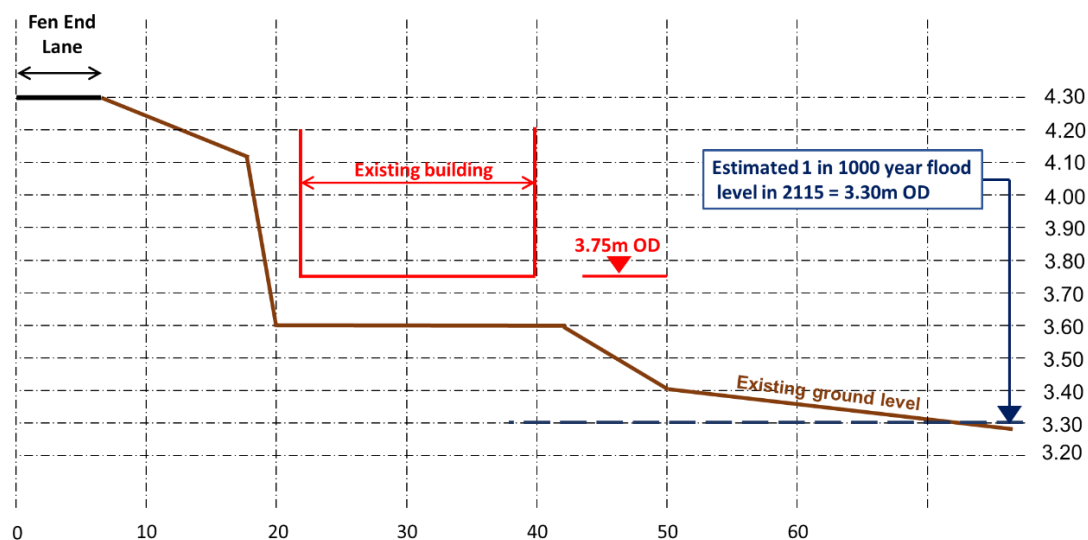

The risk of flooding to the building from IDB drains can be considered low, as the ground floor level of the building is 450mm above the lowest level shown on the section. Any flooding from a failure in the IDB system will flood lower land at 3.00m OD and below and will not affect the building.

The risk of surface water flooding needs to be considered, as the levels of Burr Lane and Fen End Lane near the property are higher than floor level of the building. However it can be seen from the section that if any surface water accumulated in the paved area around the perimeter of the building then this would flow eastwards into the area behind the existing building which is at least 200mm below the level the paved area around the perimeter of the building. Therefore this risk can be considered to be adequately mitigated.

The proposed development is not in a functional flood plain as defined by PPS 25.

Recommendations

In any area at risk of flooding it is preferable that new dwellings should be of two story construction with all bedrooms at first floor level. This is to provide a refuge for residents if the buildings were to become flooded after a major breach of the tidal bank, and ensure there is no danger to residents when they are asleep.

However as there is no predicted risk in a 1 in 1000 year event in 2115 then it is considered satisfactory to convert this building to a single storey dwelling with sleeping accommodation on the ground floor.

The developer should advise future owners and occupiers of the property to register with the Environment Agency's Floodline Warnings Direct Service.


The developer should check the existing soakaways to ensure they are adequate to dispose of the run-off from the roofs of the buildings.

S M HEMMINGS B Sc C Eng MICE MIWEM


stuart.hemmings@btinternet.com

3rd December 10th 2018


LOCATION PLAN

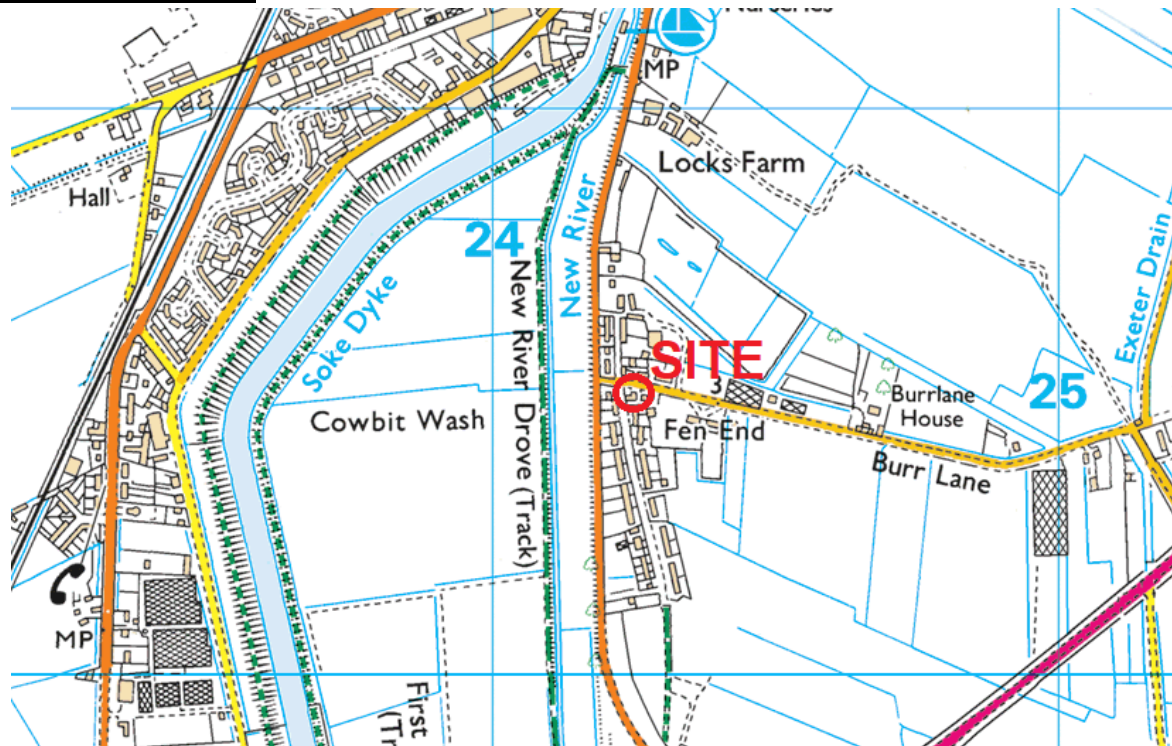


PLAN SHOWING SITE LEVELS

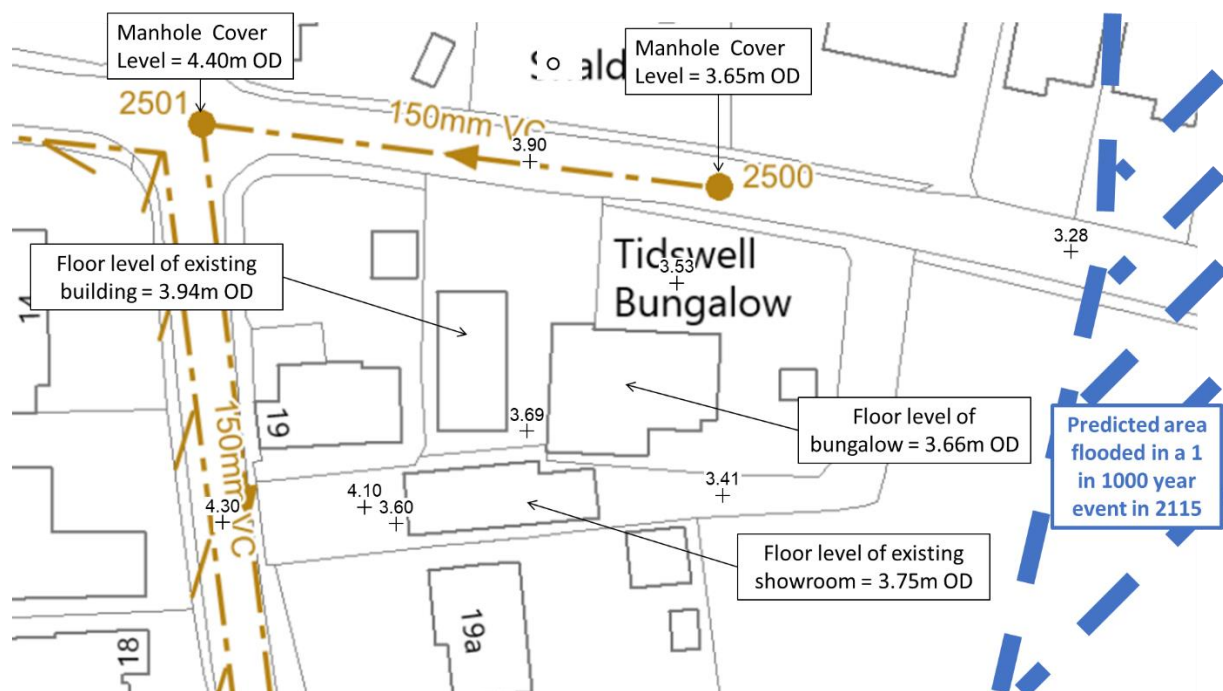

PLAN OF IDB DRAINS

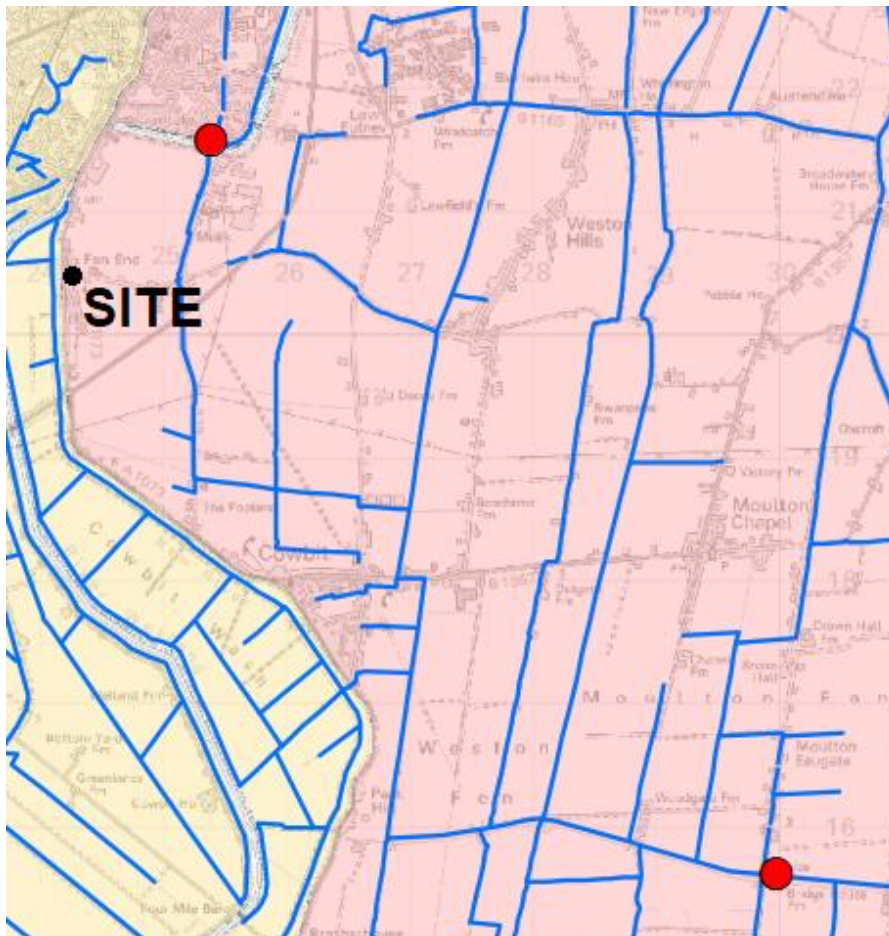

PLAN OF PROPOSED DEVELOPMENT

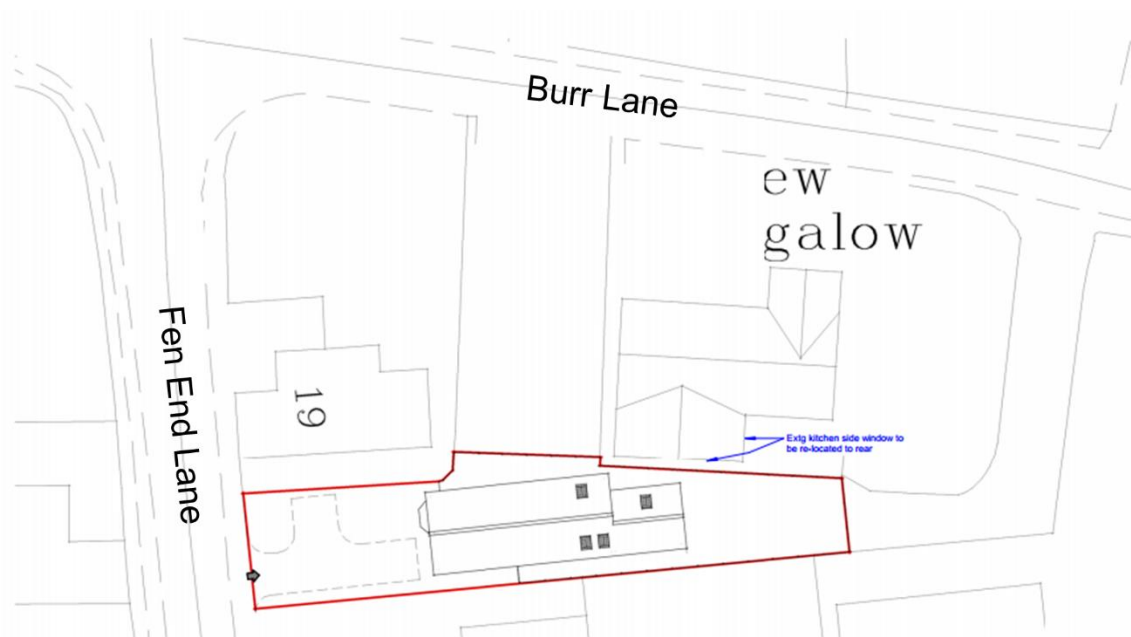

APPENDIX A CLIMATE CHANGE

The Environment Agency has issued revised guidance on climate change and have now stated that the new predictions should be considered and incorporated into all flood risk assessments produced after 19th February 2016.

Listed below are the climate change allowances in three documents:

- South Holland SFRA
- EA guidance (2013)
- Revised EA guidance

The recommendations in each document are shown below.

2010 South Holland DC SFRA

The SHDC SFRA states that the the following allowances have been made for climate change:

4.4 Climate Change

Scenarios for the years 2055 and 2115 include for climate change contingency allowances to the amount suggested by PPS25¹. These allowances are expressed in Table 2. Percentage increases are relative to the present-day.

Table 2 – Adopted Climate change contingency allowances

Parameter	Year 2055	Year 2115
Sea level rise (m)	+ 0.33	+ 1.14
Extreme wave height	+ 10%	+ 10%
Peak river flow and volume	+ 20%	+ 20%
Peak rainfall intensity	+ 20%	+30%

Where flows arise from pumping rather than natural run-off, notably in the Vernatt's Drain and for the Fenland subcatchments of the South Forty Foot Drain, peak flow rates for future eras have been taken as equal to current rates since this SFRA assumes all flood risk management measures will remain in their current state.

2013 Guidance to Planners

Guidance to planners was issued by EA in September 2013

Table 1: Recommended contingency allowances for net sea level rises (Net sea level rise (mm per year) relative to 1990)

	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
East of England, east midlands, London, south-east England (south of Flamborough Head)	4.0	8.5	12.0	15.0
South-west England	3.5	8.0	11.5	14.5
North-west England, north-east England (north of Flamborough Head)	2.5	7.0	10.0	13.0

Table 2: Recommended national precautionary sensitivity ranges for peak rainfall intensity, peak river flow, offshore wind speed and wave height

Parameter	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
Peak rainfall intensity	+5%	+10%	+20%	+30%
Peak river flow	+10%	+20%		
Offshore wind speed	+5%		+10%	
Extreme wave height	+5%		+10%	

Revised 2016 EA Guidance

Table 1 peak river flow allowances by river basin district (use 1961 to 1990 baseline)

River basin district	Allowance category	Total potential change anticipated for '2020s' (2015 to 39)	Total potential change anticipated for '2050s' (2040 to 2069)	Total potential change anticipated for '2080s' (2070 to 2115)
Anglian	Upper end	25%	35%	65%
	Higher central	15%	20%	35%
	Central	10%	15%	25%

For more vulnerable development in flood zone 3 the higher central and upper end should be used to assess the range of allowances.

Table 2 peak rainfall intensity allowance in small and urban catchments (use 1961 to 1990 baseline)

Applies across all of England	Total potential change anticipated for 2010 to 2039	Total potential change anticipated for 2040 to 2059	Total potential change anticipated for 2060 to 2115
Upper end	10%	20%	40%
Central	5%	10%	20%

Table 3 sea level allowance for each epoch in millimetres (mm) per year with cumulative sea level rise for each epoch in brackets (use 1990 baseline)

Area of England	1990 to 2025	2026 to 2050	2051 to 2080	2081 to 2115	Cumulative rise 1990 to 2115 / metres (m)
East, east midlands, London, south east	4 (140 mm)	8.5 (212.5 mm)	12 (360 mm)	15 (525 mm)	1.24 m

Table 4 offshore wind speed and extreme wave height allowance (use 1990 baseline)

Applies around all the English coast	1990 to 2050	2051 to 2115
Offshore wind speed allowance	+5%	+10%
Offshore wind speed sensitivity test	+10%	+10%
Extreme wave height allowance	+5%	+10%
Extreme wave height sensitivity test	+10%	+10%

Effects on Predictions of Flood Risk in FRA

1) Flooding from Tidal River Welland

The FRA has identified the first source of flooding where the new climate change recommendations could affect the predictions of flood levels in 2115 at the development site is flooding from the tidal River Welland.

The contingency allowance in metres for the years 2055 and 2115 using 1990 as a baseline in the SFRA compared with the guidelines is as follows

Year	SFRA	2013 guidance	Revised 2016 guidance
2055	0.33	0.395	0.412
2115	1.14	1.205	1.24

Therefore it can be seen that the revised guidance increases the maximum allowance for sea rise in 2115 by 100mm for the maps in the SFRA and 40mm for maps issued by the Environment Agency. The maps in the SFRA predict that no flooding will occur

on the development site in a 1 in 1000 year event in 2115. The small increase in maximum tide levels will not change the predictions of flood depth on this site.

2) Flooding from River Welland, Coronation Channel and the IDB drainage system

As the development is in flood zone 3 and is classed as more vulnerable, the central climate change allowance, which is 35%, should firstly be considered. After considering the effects of this increase the higher central, which is 65%, should be considered to assess the effect of this.

The EA have been using an allowance of 20% for climate change over the past few years in their assessments and modelling of their systems. The SHDC SFRA also has used this figure of 20%. The increase to 35% and 65% will not significantly change the conclusion in the SFRA of what might happen if a breach occurred in the bank of the Coronation Channel or the Barrier Bank. If there are additional flows along this part of the Coronation Channel and River Welland it will lead to the storage systems of the Cowbit and Crowland Washes operating and additional overtopping over lower banks rather than any significant increase in levels in the river.

IDB's have been using an allowance of 20% for climate change over the past few years in their assessments and modelling of their systems. Generally IDB's are happy that their systems provide a 1 in 100 year standard to most urban areas at the present time.

South Holland IDB, and all IDB's, are aware that climate change will affect the operations of pumping stations, sluices and drainage channels. Pumping stations and sluices only have a 30 year life and will need to be refurbished or rebuilt within this timespan. It is assumed that South Holland IDB will continue to review the modelling they have already carried out and when the Board consider these refurbishments adequate arrangements will be made to incorporate the latest climate change projections in order that the Board continues to provide the same standard of service as the present day.

Therefore it is considered that the conclusion that the risk of flooding is less than 1 in 1000 years in 2115 is not affected by any small increase in predicted flood level because of these new climate change predictions.