Existing Chapel to be converted into a dwelling in the manner shown.

Rear modern single storey section to be unaltered.

Existing external walls to main Chapel to be drylined internally.

Existing floor to main Chapel to be replaced with new insulated concrete floor.

Provide insulation to main chapel roof between roof trusses.

Heating to be by Air Source Heat Pump and Log Burner.

Provide First Floor areas to main Chapel as shown. For all structural support of new floor refer to Sidebottom Richardson Cheng structural calculations/details.

Provide and install 100mm stud walls to form Cupboard, En Suite and Bedrooms as shown.

Existing Windows to main Chapel to be replaced with new timber double glazed windows.

Connect foul drains to existing foul drainage system. Check for adequate depth if found inadequate to connect direct to existing cesspool.

First floor joists to be 225 x 50 SC3 grade at 400 centres.

Make good to all disturbed and affected areas.

Private Stairs
Stairwell formed by timber trimmers and load bearing walls (see plan). Provide timber balustrading to open side of stairs 900mm above pitch line and 1000mm high to stairwell opening to act as guarding and to be capable of resisting a horizontal force of 0.36 KN/m. Balustrading to be vertical type, not horizontal or ranch style. No parts of stairs to have any gaps greater than 99mm. Provide timber handrail to top of balustrading or independently 900mm above pitch line. Ensure minimum headroom above pitch line is 2000mm. Total rise: See plan. Maximum rise: 220mm. Minimum going: 220mm. Maximum pitch: 42°. Read in conjunction with Approved Document K.

Roof Ventilation to Sloping Ceiling
At eaves provide proprietary ventilation equivalent to a 25mm continuous gap along eaves. At ridge provide proprietary ventilation equivalent to a 5mm continuous gap.

Bathroom/En-Suite Ventilation
Provide proprietary mechanical extract ventilation unit capable of extracting 15lt/sec. System to offer intermittent operation.

Hot Water Storage
Provide system approved by BBA and installed by BBA approved installer. System to be vented and insulation in accordance with BS5615 1985. Provide thermostatic control.

Heating System
Provide room thermostat or thermostatic radiator valves or similar approved to control the output from the heating system.

Insulated Pipes and Ducts
All pipes, which do not contribute to the heating of the building, will be insulated to BS5422 1977.

Safety Glazing
Provide safety glass to BS6206 to all windows to a minimum height of 800mm above floor level plus doors to a minimum height of 1500mm above floor level. Side screens to be same as doors if within 300mm of doors.

Smoke Detection
Provide mains operated self-contained smoke alarms to BS5839 Part 6, 2006 in accordance with Approved Document B1.

Foul Water Drainage
Underground drainage to be proprietary 110mm diameter p.v.c. pipes flexible jointed to fall 1:70 bedded in 100mm pea gravel. Under building drains to be encased in 150mm pea gravel with lintel over pipes at wall abutments. Where drain passes through wall, provide suitable protection to prevent gas ingress to building. 110mm diameter soil and vent pipe to extend 900mm above window head and to terminate in balloon finial. Soil and vent pipe to be fitted with access plate at base. Provide suitably sized wastes from all appliances (in accordance with Approved Document H) complete with minimum 75mm deep sealed traps and rodding eye access points at every direction change. All above ground drainage to BS5582 and all underground drainage to BS8301. Provide seal plates both sides of pipe entry to avoid vermin entry.

Protection to Underground Pipes
Where pipes are not under road and have less than 600mm cover concrete paving slabs should be laid as bridging above the pipes on minimum 75mm pea gravel. If flexible pipes are under a road and have less than 900mm cover reinforced concrete bridging should be used instead of paving slabs. Provide compressible material below slab/concrete.

Inspection Chamber Construction
Proprietary polypropylene inspection chambers bedded on 150mm concrete. Form protective 255mm thick concrete collar around head of inspection chamber with 300mm projection from cover. Covers to be Grade C light duty unless inspection chambers are in driveways where Grade B medium duty covers are to be used.

First Floor Walling
Provide 50 x 75mm timber vertical studs at 400mm c/c to be constructed of 50 x 75mm timber head and sole plates. Provide 12.5mm Gyproc plasterboard of 10kg/m^3 density and skim finish to both sides. Provide to airspace proprietary acoustic insulation. Timber stud partitions running parallel to joist direction to be built off 2 no. floor joists fixed together. Provide 1 no. joist either end of stud partition joist beam to fix flooring.

First Floor Construction
19mm flooring grade moisture resistant decking on timber joists as stated on plan. To external walls joists to be supported on joist hangers (not built into wall). Provide 30mm x 5mm mild steel restraint straps to joists running parallel with wall securely fixed to walls and to span minimum 3 no. joists at maximum 1200mm c/c. At strap positions provide pack and noggin to joists. Solid strutting to be installed mid-span where span of joists between 2.5m and 4.5m. For spans in excess of 4.5m position of struts at 1/3 rd span. Double up floor joists locally under bath feet and hot water cylinder where applicable. All doubled up joists to be bolted together at 600mm centres.

Ceilings
To all insulated roof ceilings provide 12.5mm Gyproc Duplex plasterboard of 10kg/m^2 or similar and either 5mm skim or Artex finish. To remaining ceilings provide 12.5mm Gyproc plasterboard or similar with finishes as above.

Ground Floor Construction
65mm sand/cement screed on 100mm Celotex insulation with perimeter insulation to screed on 1200 gauge polythene d.p.m. on 100mm concrete oversite on minimum 150mm, maximum 600mm well blinded and compacted hardcore. Wall d.p.c. to lap floor d.p.m. by a minimum of 50mm.

External access door that serves as access to ground floor WC to have a minimum clear opening width of 775mm.

Ensure minimum 900mm corridor width, access to ground floor WC with no obstructions (radiators, etc.) to corridor area adjacent doors

Sockets, light switches, TV points, doorbells to habitable rooms to be positioned between 450mm and 1200mm above floor level.

Provide area within main driveway of hard surfacing (block paving, tarmac or similar) of adequate size to enable wheelchair access from parked vehicle direct to main access of dwelling. Footpath minimum 900mm wide to be directly linked to hard surfacing driveway.

Minimum width of corridors and passageways for a range of doorway widths

Doorway clear opening width (mm)	Corridor/Passageway width(mm)
750 or wider	900 (when approached head-on)
750	1200 (When approached not head-on)
775	1050 (when approached not head-on)
800	900 (when approached not head-on)

All windows to give minimum 1/20th of floor area as ventilation and to be double-glazed.

Glazing
All windows and doors to be double-glazed with Pilkington 'K' glass or similar approved, to achieve either WER Band C or a 'U' value of 1.6W/m^{2}K.

Commissioning of Heating and HWS Systems
A competent person, i.e. the main contractor or sub-contractor shall supply a Certificate of Satisfactory Compliance with Building Regulations Part L. A copy of which shall be made available to both the client and the Building Control body.

A suitable set of operating and maintenance instructions are to be made available to the client to explain to the householders how to operate the systems so that they can perform efficiently and what routine maintenance is advisable for the purpose of the conservation of fuel and power.

Internal Lighting
Provide energy efficient lights that only take lamps having a luminous efficiency greater than 45 lumens per circuit watt. Examples of lamps are fluorescent tubes and compact fluorescent lamps (note GLS tungsten lamps with bayonet cap or Edison screw bases).

Method of determining number of locations:

75% of all lighting to be energy efficient.

Excludes garages, lofts and outhouses.

Dry Lining
Dry line existing solid external walls with Celotex TUFF-R™ Zero GA3000Z system internally all in accordance with manufacturers specification.

Electrical Work
All electrical work required to meet the requirements of Part P (electrical safety) must be designed, installed, inspected and tested by a person competent to do so. Prior to completion of the works the council must be satisfied that either:-
a) an electrical installation certificate issued under a competent person's scheme has been issued
or
b) an appropriate electrical installation certificate has been issued for the work, and that it has been signed by a person competent to do so.

Stud Walls between Habitable Rooms
To have 15mm plasterboard finish to both sides of 50mm x 100mm studs with 100mm fibreglass between to reduce sound transmission

Purge ventilation to windows
For a hinged or pivot window that opens 30° or more the height and width should be at least 1/20th of the floor area of the room.
For a hinged or pivot window that opens less than 30° the height and width should be at least 1/10th of the floor area.

Dry Lining of Existing External Walls to Create New Dwelling
Dry line existing solid external walls with 55mm Celotex GA4000, joints taped to create VCL + air leakage barrier cavity (low emissivity) – 25 x 47mm battens at 600mm centres, 12.5mm Knauf wallboard, or similar approved. All to give "U" value of 0.28W/m^{2}K.

Roof Insulation to Sloping Ceiling
To ceiling slope provide 50mm Celotex GA4000 between rafters and 70mm Celotex CA4000 below rafters with joints taped to create VCL + air leakage barrier batten air space – low emissivity – 12.5mm Knauf wallboard, or similar approved. All to give 0.18W/m^{2}K.

The flow rates for the mechanical extractor must be tested and results given to Local Authority Building Control to show that the extraction rate is the same as that specified in 'Approved Document F – Means of Ventilation', no later than 5 working days after the final test.

Provide wholesome or softened wholesome water to any wash basin in or adjacent to any room containing a sanitary convenience and any wash basin, bidet, fixed bath and shower in a bathroom.

Provide heated wholesome water or heated softened wholesome water to any wash basin or bidet in or adjacent to a room containing a sanitary convenience and any wash basins, bidet, fixed bath or shower in a bathroom and any sink that is provided in an area where food is prepared.

The hot water supply to any fixed bath is to be designed and installed with measures to ensure that the temperature of the water that can be delivered to the bath cannot exceed 48°C.

All glazing to meet the requirements of 'Approved Document K – Safety Glazing' in relation to impact, opening and cleaning.

Water calculations are to be supplied to South Holland District Council Building Control showing how the water usage will be limited to 125 litres/per person/per day.

Due to a new fixed solid fuel appliance being installed, provide a carbon monoxide alarm.

Where a new or replacement fixed solid fuel appliance is installed in a dwelling, a carbon monoxide alarm should be provided in the room where the appliance is located and sited either on the ceiling or at least 300mm from any wall, on a wall as high up as possible above any doors and windows but not within 150mm of the ceiling and between 1m and 3m horizontally from the appliance.

Mechanical Ventilation
Mechanical ventilation systems are to be commissioned in accordance with Regulation 44 (where they can be tested and adjusted to provide adequate ventilation) and a copy of the commissioning notice is to be given to the local authority not more than 30 days after completion of the works.

If the log burner has an output over 5kw provide a permanently open air vent, all in accordance with manufacturer's recommendations.

Provide a suitable hearth for the log burner, all in accordance with manufacturer's recommendations.

Where the solid fuel appliance is installed provide a carbon monoxide alarm in accordance with Approved Document J.

Hot Water Temperature
Where the operating temperature of the hot water storage vessel is capable of reaching 80°C it should be fitted with a safety device to ensure the temperature distributed does not exceed 60°C. The safety device from the hot water supply should discharge to a place where it will not pose a danger to any person. The hot water supply to the bath should be controlled so that it does not exceed 48°C

All easily accessible doorsets (including garage doorsets and communal entrance doorsets) that provide access into a dwelling or into a building containing a dwelling should be secure doorsets to the following:
a Manufactured to a design that has been shown by test to meet the security requirement of British Standard publication PAS 24:2012 or
b Designed and manufactured in accordance with Approved Document Q appendix B.

Ground floor, basement and other easily accessible windows (including accessible rooflights) should be secure windows in accordance with Approved Document Q paragraphs 2.2 and 2.3, windows should be made to a design that has been shown to meet the security requirement of the British Standards publication PAS 24:2012.

Log Burner to be chosen by client and agreed with the Local Authority Building Inspector at a later date.

The building should have a provision that in the future copper or fibre-optic cables or wireless devices capable of delivering broadband speeds greater than 30 Mbps can be installed.

Consumer units should be mounted so that the switches are 1350 – 1450 mm above floor level.

Provide area for provision of solid waste storage (rubbish bins).

Provide a fibrous separating member between floor screed and insulation and provide chicken wire between insulation and screed.

First floor habitable rooms shall have means of escape windows with openings of at least 450mm wide x 450mm high and a minimum area of 0.33m^2. Escape windows to be within 1.1m of floor.

Smoke detectors to be to BS5839/6:2004, Grade D, Category LD3.

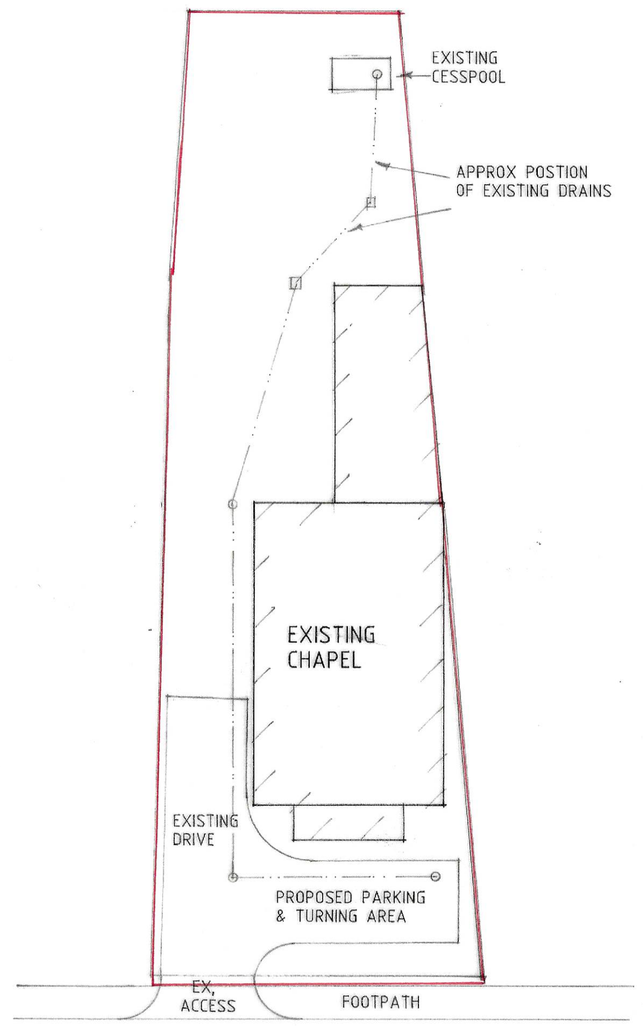

SITE PLAN

THIS DRG. TO BE READ IN CONJUNCTION WITH SD18-031/1, SD18-031/2, SD18-031/3, SD18-031/4

General Notes

Do not scale from this drawing

This drawing is copyright and may not be altered, traced, copied, photographed or used for any purpose other than that for which it is issued without written permission from Messrs Status Design.

The General Contractor is to check all dimensions on site and report discrepancies to the Architect

All details shown on this drawing are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions unless reported to the Architects so that design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken

Please note this drawing is not a conveyance drawing.

Proposed on-site roadways to be maintained by the owner for the life duration of the property.

This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning and Building Regulations approvals. This drawing must not be used as a contract document alone. The works will not be supervised or inspected by Status Design unless specifically contracted to do so. It is the client or their agent's responsibility to control workmanship, substitution of materials, adherence to specification, variations to contract, etc.

All materials to be new unless stated otherwise and all components and materials, etc. to be used, fitted and installed, etc. in strict accordance with manufacturers' instructions and relevant Code of Practice. Materials should conform to appropriate British Standard specifications or BBA Certificate or European Code equivalent.

The Employer/Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health and Safety Legislation for Building Sites and Work Places. The Employer/Client is advised that should the works need to comply with the Construction Design and Management Regulations 2015 (CDM) and Health and Safety at Work, etc., Act 1974 (HSW Act) an independent Planning Supervisor will be required, whom should be supplied with a set of all relevant drawings, etc.

The works shall comprise of all that shown on the drawings and information etc. Works that may not specifically be shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.

These notes relate to this drawing and all associated drawings.

It is the property/landowner's responsibility to be aware of the Party Wall, etc. Act 1996 when building or carrying out alterations in close proximity to adjoining neighbour's boundaries

Status DESIGN
CONSULTANTS IN ARCHITECTURE & PLANNING

PROPOSED CHANGE OF USE & CONVERSION OF CHAPEL TO A DWELLING AT LITTLEWORTH DROVE, HOP POLE FOR

MR. & MRS. D. BRENNAN.

SITE PLAN

1:200	SD18-031/5
AUG-18	B.GILHAM.

2 Edinburgh Walk, Holbeach,
Spalding, Lincs. PE12 7AP
Tel: 01406 424343 Fax: 01406 490702