
SOUTH HOLLAND D.C.
PLAN DEPT.
24 MAR 1995
REF H16/0330/95

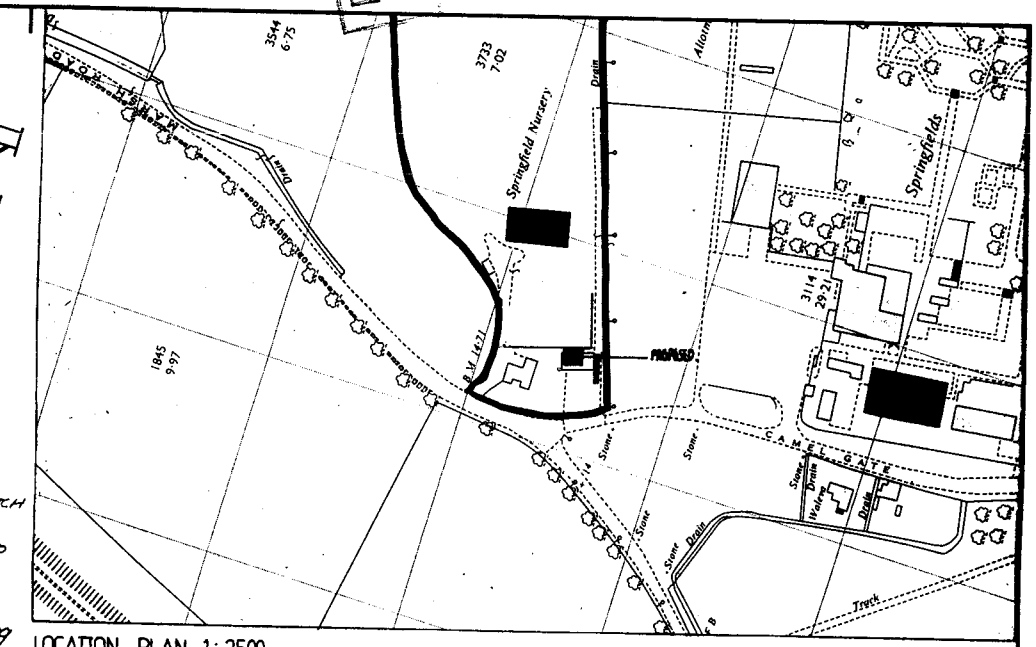

LOCATION PLAN 1:2500

...e opening lights to
...nt of 1/20th the floor
... to be fitted with hit
...rs to give min 4000msq
... ventilation per room.
...ve in addition to
...mounted mechanical
...xtract not less than
...d. Bathrooms to be as
...tract not less than 15

...CT VENTILATOR LIGHT SWITCH
... AND CEILING MOUNTED
...O EXTERNAL AIR VIA
... DUCTING CONNECTED TO
... TILE VENTILATOR
...NAL

extract ventilator to be capable of extracting at a rate not less than 3 air changes

E605/C