




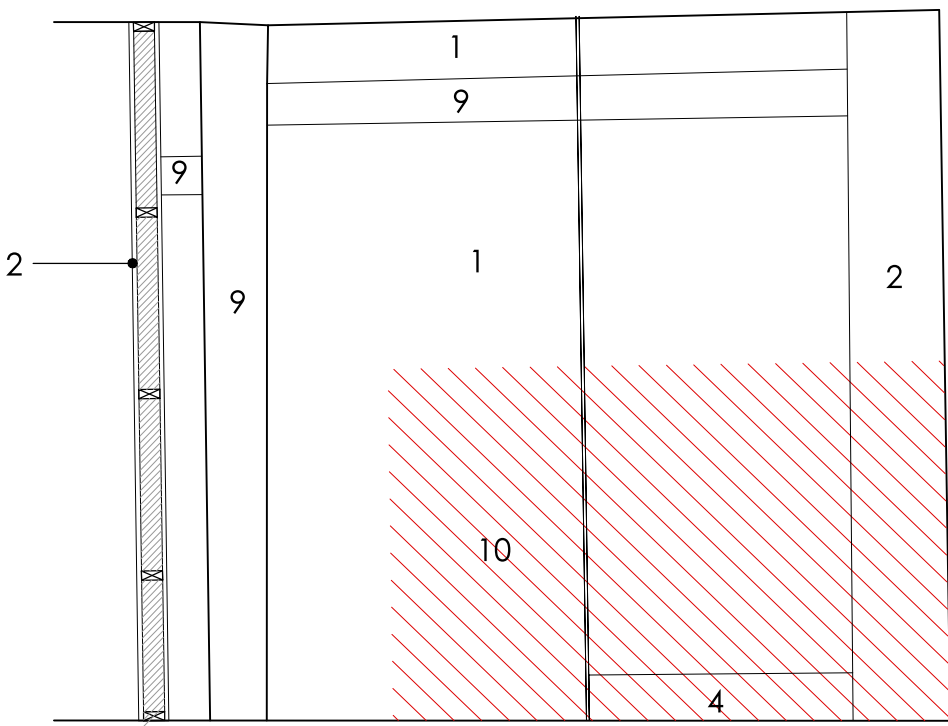


02 ELEVATION A

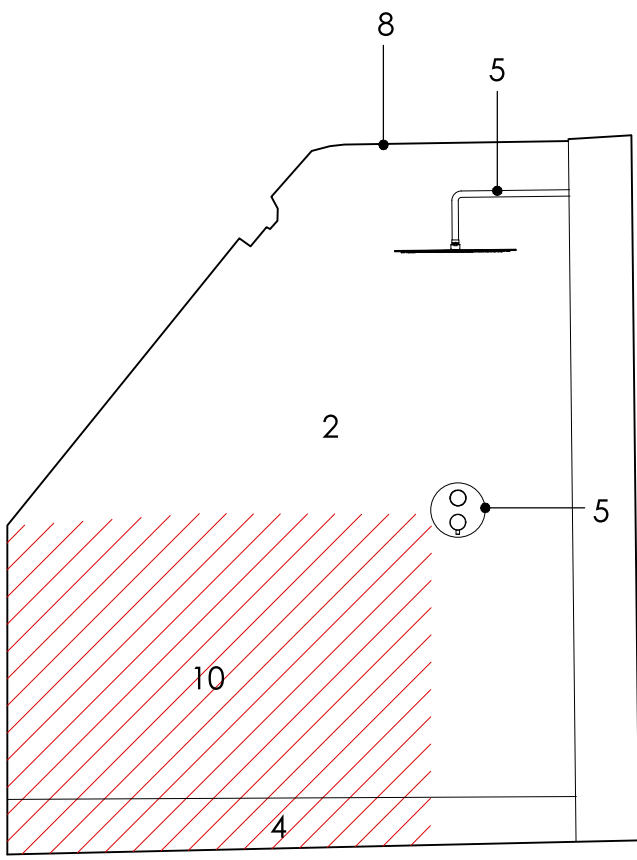


03 ELEVATION B

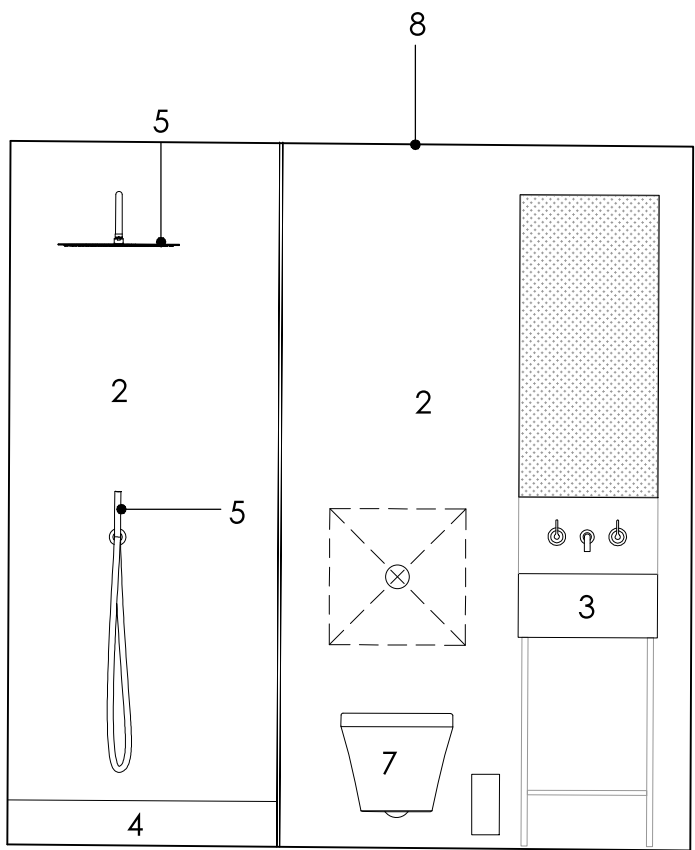

04 ELEVATION C

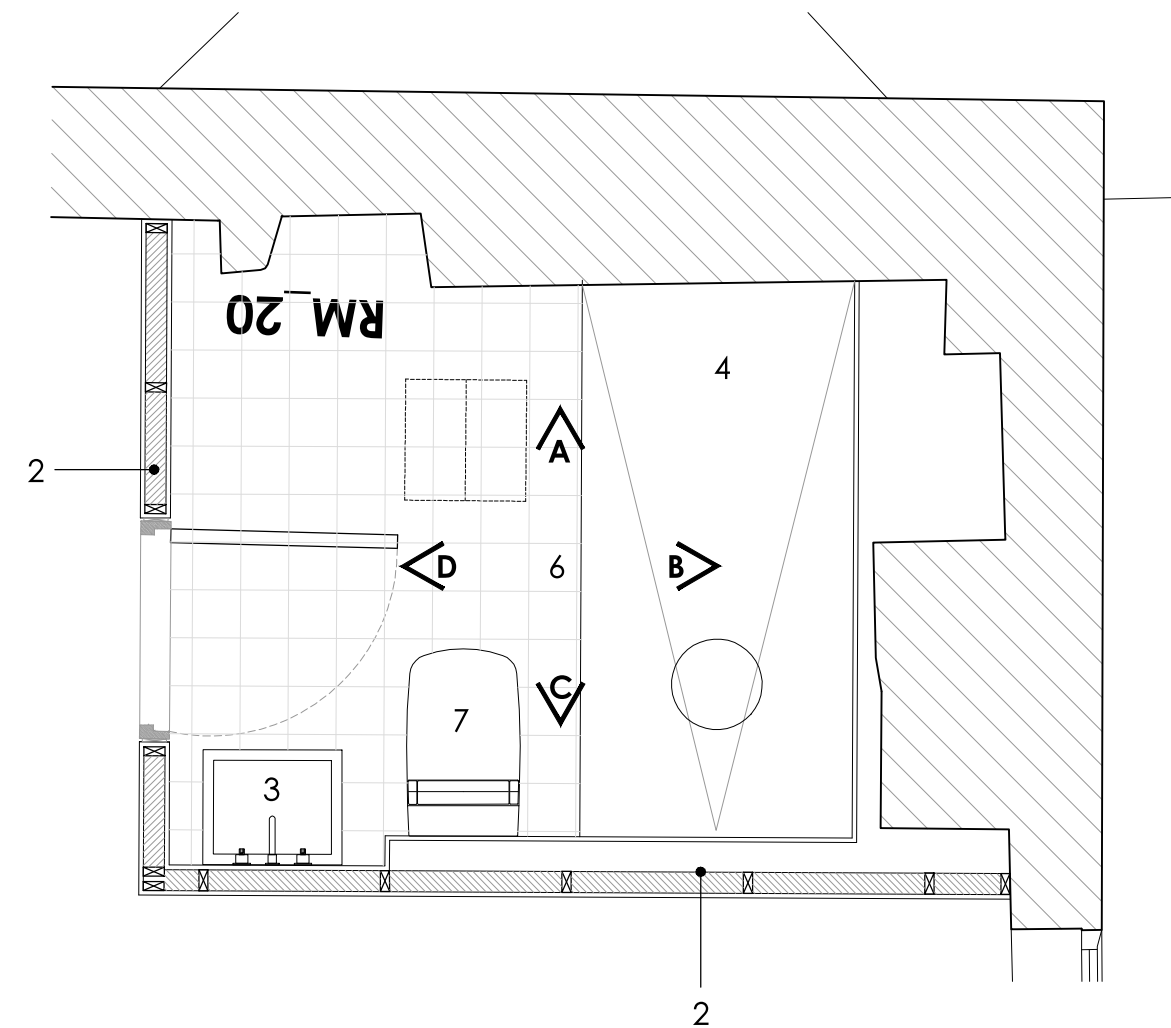

01 P L A N

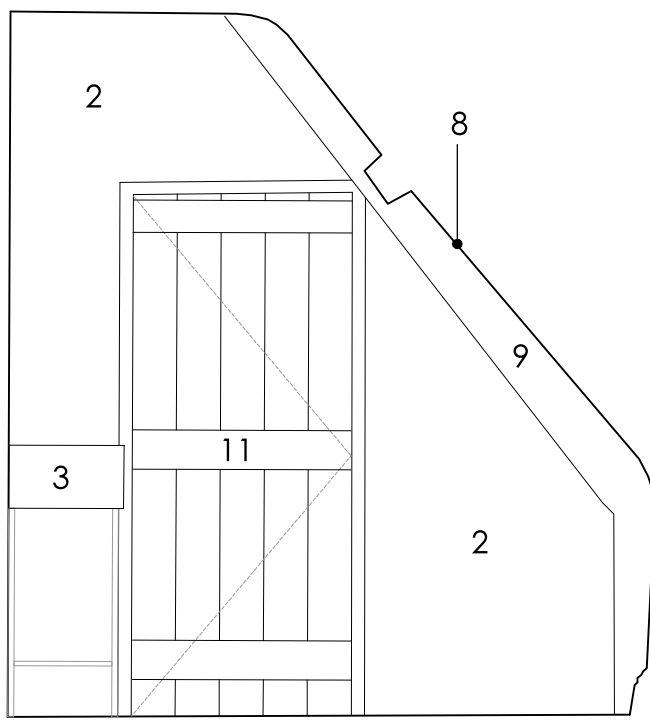

05 ELEVATION D

- Carefully repair existing wall finish and make good plaster where necessary - paint finish.
- Proposed stud wall and service void. Tile finish in shower and plaster and paint finish in en-suite area.
- Armitage Shanks Belfast sink or similar approved. - Taps and mixers stainless steel finish, manufacturer to be confirmed.
- Proposed raised shower to achieve fall for drainage.
- Shower head and controls stainless steel finish, manufacturer to be confirmed.
- Existing faux flooring to be carefully removed, Timber boards to be carefully stripped, repaired, re-laid, flooring to be tile finish.
- Wall hung toilet manufacturer to be confirmed - fitted onto a stud partition for services.
- Carefully repair ceiling, and make good existing plaster, paint finish.
- Exposed Timber beams to be cleaned and repaired, left exposed.
- Carefully remove timber board covering and remove contents. Existing pipe work outlets to be re-used. Walls to be repaired and made good, point finish.
- Proposed new door to match existing.

Note: Remedial works as per CARE Engineers drawings.