

M.D. FOULKES Building Design & Construction Services


Job Ref P.C. Drg. N° 6 scale 1:20 1:5

details of already fitted shop windows and details of proposed internal joinery

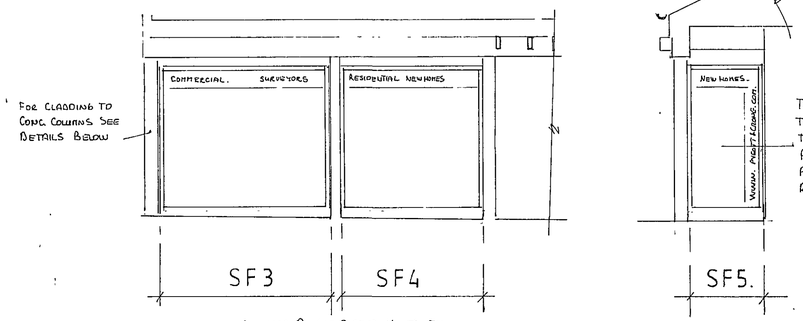



STANDARD DOUBLE GLAZED UNITS IN METAL FRAMES. LETTERING TO BE TRANSFERS APPLIED ON INSIDE.

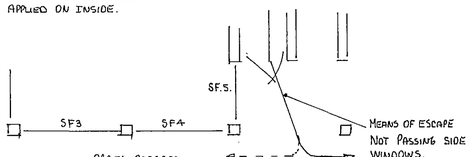

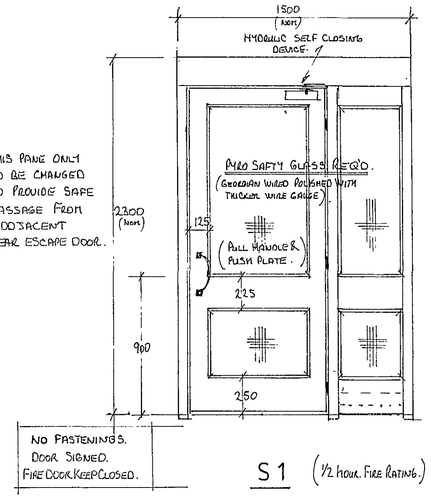


S1 (½ HOUR. FIRE RATING.)

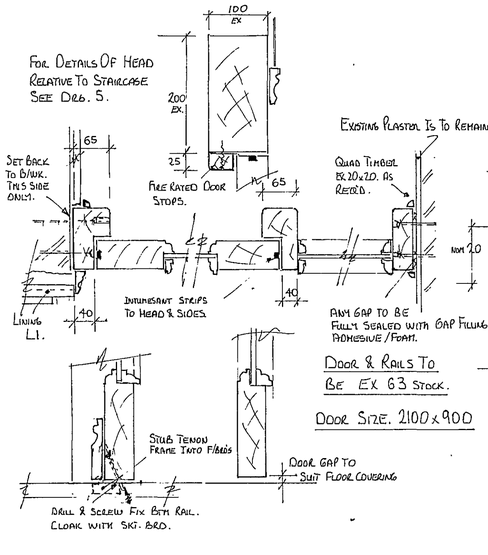

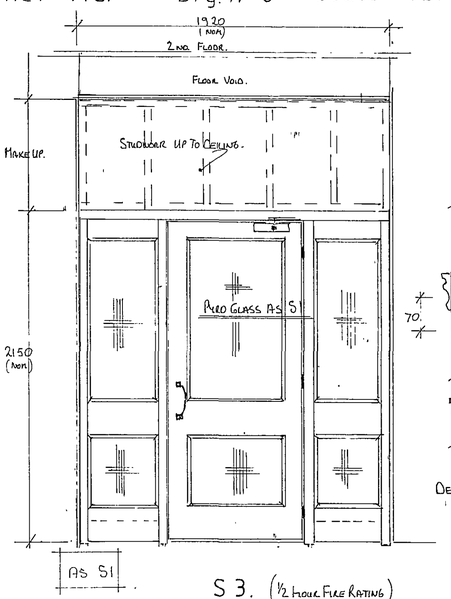


DETAILS GEN. AS. S1.


S3. (½ HOUR FIRE RATING)

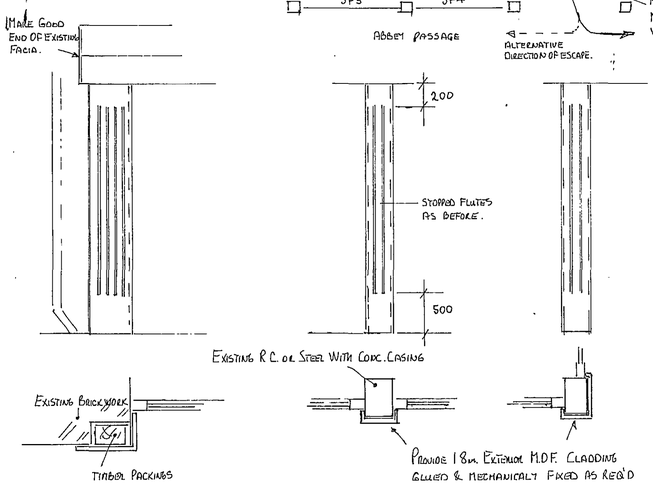


proposed decoration to existing columns

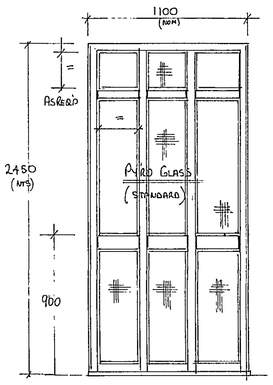


S2 (½ HOUR FIRE RATING)

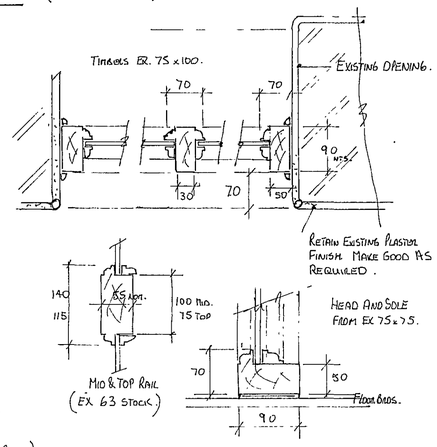

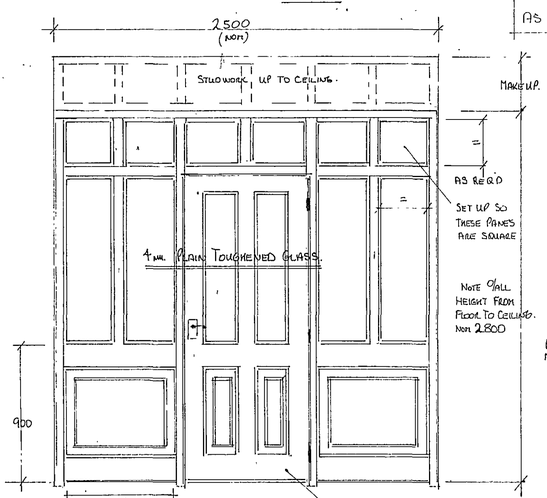



S4

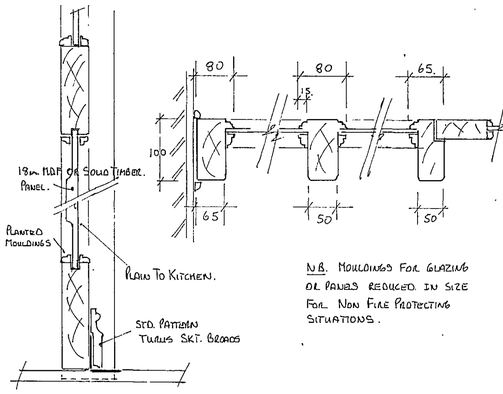


N.B. MOULDINGS FOR GLAZING OR PANELS REDUCED IN SIZE FOR NON FIRE PROTECTING SITUATIONS.


all doors and frames to be made using traditional mortice and tenon joints.

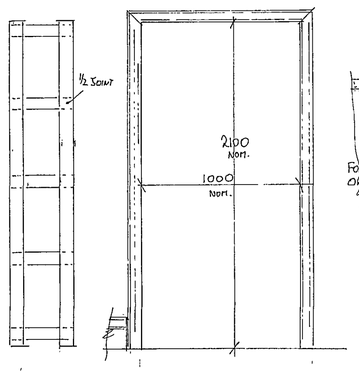

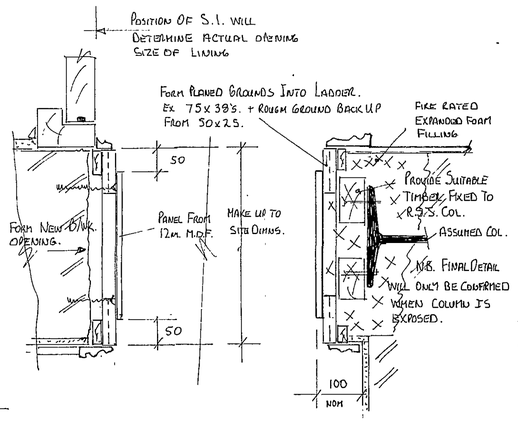


L1

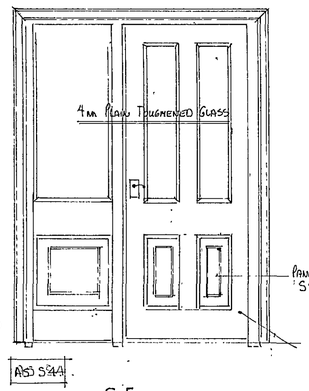

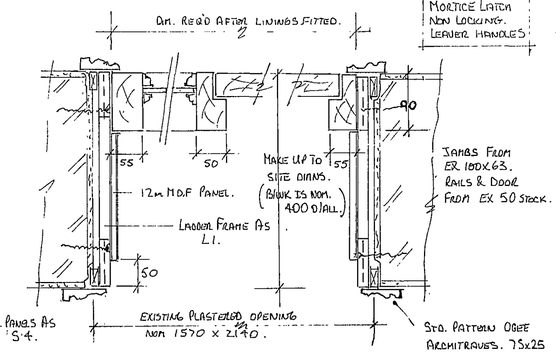


DOOR SIZE 5 NO 2040x826x44 THK.

S5

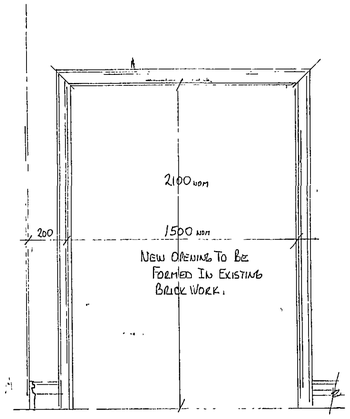

L2

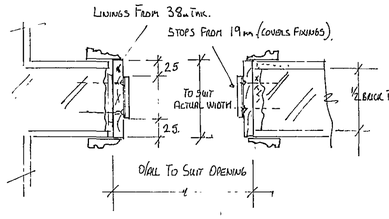

NOTES

SIZING OF TIMBER SECTIONS CAN BE VARIED BY MINOR AMOUNTS TO SUIT TIMBER STOCK.
ANY PROPOSED MAJOR CHANGES MUST BE APPROVED BY CONSERVATION OFFICER BEFORE FABRICATION.
WHERE POSSIBLE GLASS STOPS & DOOR STOPS TO BE MACHINED FROM SOLID STOCK.
ALL TIMBER TO BE SELECTED JOINERY QUALITY SOFT WOOD.
KNOT & PRIME FOR FINAL PAINTING IN-SITU.

GLASS TO BE BEDDED IN SUITABLE SILICON COMPOUNDS. BEADING RETAINING FIRE PROOFING GLASS TO BE DRILLED & SCREWED @ RECOMENDED SPACINGS.
FIXING OF FRAMES & LININGS USING SUITABLE "FISCHER" FIXINGS AND IN ADDITION SUITABLE GUN APPLIED ADHESIVES AND EXPANDING FOAM.
ALL DIMENSIONS OF FRAMES, LININGS ETC. MUST BE CHECKED BEFORE MANUFACTURING UNITS.

SHDC
Planning & Development
23 MAR 2007
Ref: 0378/07

DETERMINED PLAN