PIT OPTION

Pit must be central to lift position and up against any threshold face.
Must be smooth finish, flat and level to within +/-5mm.

SPECIAL REQUIREMENTS

1 Hour fire doors
Telephone (phone point by others)
External roof & battery maintained lights
Voice synthesiser and scrolling dot matrix

LIFT SPECIFICATION

Rated Load 400kg.
Lift colour :- Pearl Grey (BS4300 22B15)
Control box location must not exceed 5000mm from the lift.
Remote call stations at upper and lower levels.

ELECTRICAL DATA


Control logic Deadman, 24V DC control supply.
Powerpack motor size 0.75kw
Lighting electrical supply to be independent of lift power supply.

CONTROL BOX
Size 600mm High x 600mm Long x 350mm Deep
Weight Approximately 60kg
Colour Gey (RAL 7032)


CLIENT TO PROVIDE

Dedicated 240V 50Hz Single Phase Supply.
Adequate lighting for both landing entrances.
Landing entrances to be free from hazadous obstructions, plumb smooth and level surface and true to lift travel.
A smooth and level base for the lift to sit on.
If conduit is required to be recessed into the walls from the powerpack, the client must provide this, allowing for a ø50mm clear space and draw wires.


SHDC
Planning & Development
15 JUN 2011
Ref: 0455-11

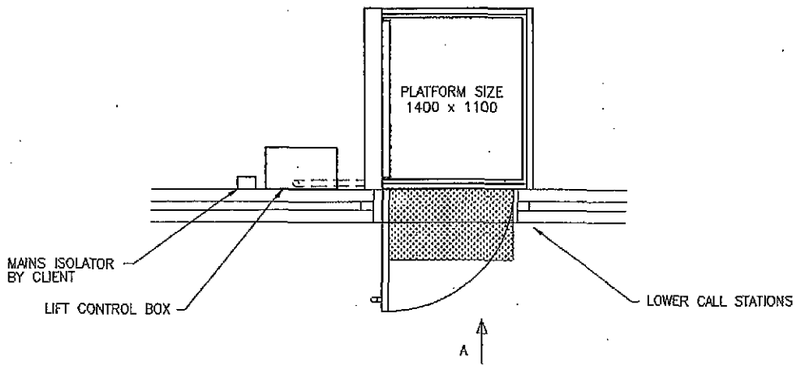


PART PLAN VIEW (LOWER LEVELS)

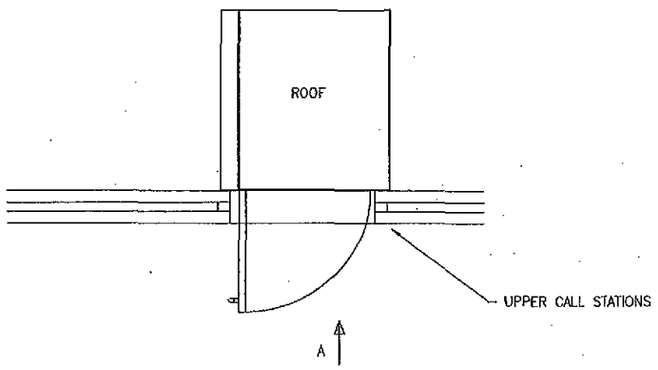


PART PLAN VIEW (UPPER LEVELS)

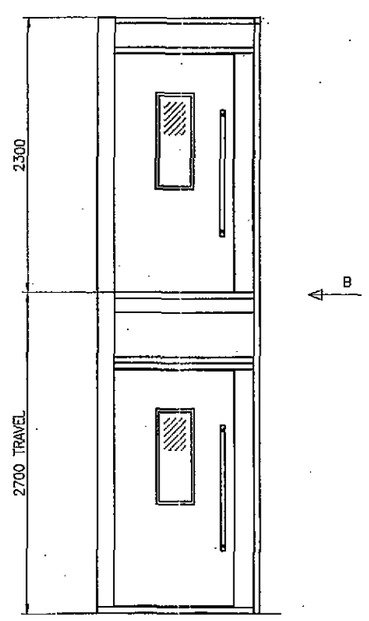

VIEW ON ARROW A

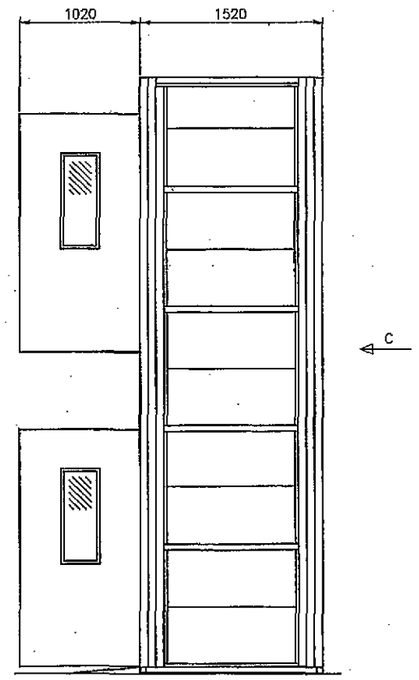

VIEW ON ARROW B

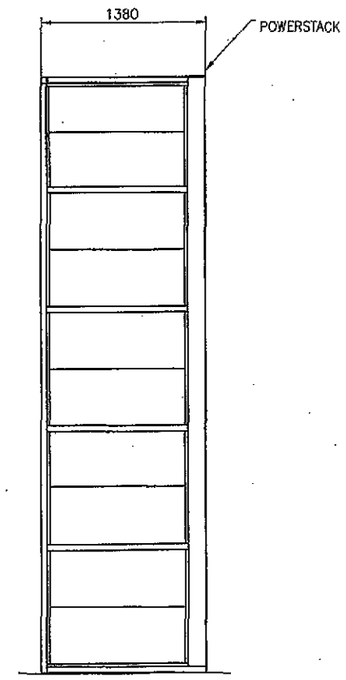

VIEW ON ARROW C

DJM	10.5.11	A	NEW DRAWING		
INITIAL	DATE	ISSUE	MODIFICATION	CHECKED	DATE

SITE ARRANGEMENT OF EXTERNAL
SAME FACE ACCESS COMPANION SE LIFT
AT NENE HOUSE, NENE COURT
SPALDING LINCOLNSHIRE

MOVEMENT MANAGEMENT. TEL: (0116) 2252 100

DRAWN	DJM	
CHECKED		
PART No.	CU2518	
ORDER No.		
SCALE	1:20 @ A2	

NC 7