

www.gbalarms.com

Why Choose GB Alarms?

Data Sheet GBA-G101-1

November 05

GB Alarms is the leading independant security company in Lincolnshire, with over 20 years experience.

Being a fully approved company with The National Security Inspectorate, we are accredited under the:

- NACOSS Gold scheme for design, installation and maintenance of electronic security systems, this includes; Intruder Alarms, Access Control Systems & CCTV Systems.
- NACOSS Guard Gold Scheme for the provision of manned security services, including, Uniformed Mobile & Static Guards, Keyholding and Alarm Response Services.
- NSI Fire Gold Scheme for the Design, Installation, Commissioning & Handover, Verification and Maintenance of fire alarm systems.



These industry schemes, recognised by insurers, indicate that our company will provide a service/ installation which fully complies with a standard and that our practices are supported by a BS EN ISO 9001.2000 management system. To ensure this, the NSI body, audits our systems twice a year.

As a member of the British Security Industry Association, we are able to influence and provide a service that is at the cutting edge of the industry. This allows the company to continuously evolve and adapt to the changes of equipment, installation standards (British and European), The Association of Chief Police Offices and industries directives.

As our offices/CCTV Monitoring Station/Manned Guard Control Room are manned 24 hours a day, you are guaranteed a response from our highly trained staff. Engineers are readily available to attend any emergency calls out of normal working hours.




As a company that invests heavily in our dedicated work force, providing a service that means you will have contact with the same friendly, efficient personnel year after year.

Our company group can provide a comprehensive security solution, a 'one stop shop' to you domestic and commercial/industrial needs.

GIVE US A CALL TODAY!

DETERMINED



GB Alarms - setting the standards



www.gbalarms.com

Day/Night Colour/Mono Camera

Data Sheet GBA-PR109-1 September 05

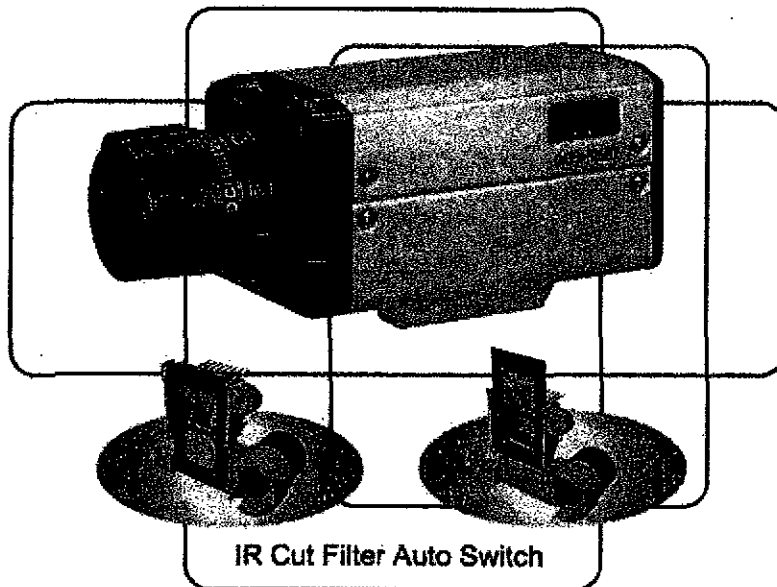

- 1/3" Sony Super HAD CCD
- IR Cut Filter mechanism, auto color & mono switching
 - Powerful white balance
- Built-in highly sensitive capacitive microphone
- Day & Night applications for 24hr surveillance
 - Internal / Line Lock selectable
- Accepts Video or DC Drive auto iris lens




G.B. Alarms - setting the standards



www.gbalarms.com

Digital Sprite 2

Data Sheet GBA-PR107-1 September 05

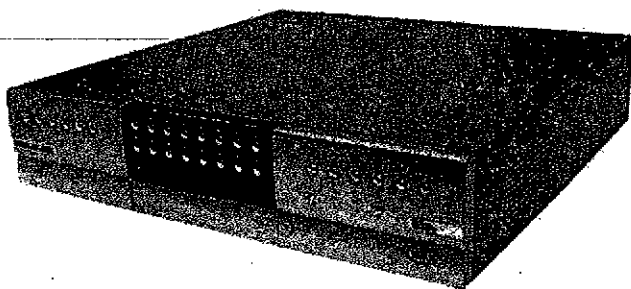

Professional CCTV Digital Video Recorder

The New Digital Sprite 2 provides true flexibility to any CCTV security solution. An intuitive interface allows easy local user operation whilst IP connectivity provides remote monitoring and system configuration via Dedicated Micros' 'NetVu Connected' software.

Internal hard disks provide more than 2 months high quality, continuous digital recording, with an option to record up to 100pps. Dedicated Micros RAID and JBOD units may be used to extend the storage solution.

High quality recordings are accessible locally to the user at the touch of a button or via powerful GOTO and event recall facilities. Remote operators can utilise the latest MPEG-4 compression technology to view images via NetVu Observer or embedded DV-IP Decoders.

The single box solution includes in-built co-axial & twisted pair telemetry that enhances the range of DS2 applications.

Variable alarm configuration allows remote notification of alarms from any single DS2 through a variety of communication channels. Pre-event alarm recording ensures images are captured before the incident occurs whilst on-site communication can be maintained through high quality bi-directional audio.


A built in DVD-R writer provides a quick and easy way of copying key events to DVD or CD on-site while FTP archiving allows evidence transfer over the network, automatically or on demand. Digital watermarking identifies and eliminates any tampering with recorded images.

The DS2 provides a self-contained local security solution whilst ensuring that the requirements of remote 24 hour surveillance are met through Dedicated Micros' professional 'NetVu Connected' solution deployed over new or existing IP enabled networks.

Features & Benefits

- » INSTANT ACCESS TO 2 MONTHS OF HIGH QUALITY RECORDINGS*
- » BUILT-IN INTERNAL DVD-R (DVD WRITER)
- » SIMULTANEOUS MPEG-4 TRANSMISSION AND JPEG RECORDING
- » COMPATIBLE WITH DEDICATED MICROs RAID AND JBOD DEVICES TO PROVIDE ADDITIONAL STORAGE
- » DESIGNED FOR BS8418 COMPLIANCE
- » SIMULTANEOUS RECORD, PLAYBACK, LIVE VIEWING, ARCHIVING AND MULTIPLE USER NETWORK VIEWING WITH NO LOSS OF RECORDING PERFORMANCE
- » VARIABLE RECORD RATES PER CAMERA UP TO 100PPS
- » RAM PRE-ALARM RECORDING TO CAPTURE EVIDENCE BEFORE ALARMS ARE TRIGGERED
- » INSTANT REMOTE ALARM MONITORING USING ETHERNET OR PPP MODEM LINK
- » DIAL-OUT ON ALARM AND ALTERNATIVE SIGNALLING PATH
- » INTEGRATED PSU
- » NETVU CONNECTED
- » ALARM NOTIFICATION VIA E-MAIL AND SMS
- » IMMEDIATE ACCESS TO ANY TIME/DATE VIA INSTANT GOTO CAPABILITY
- » IP CONNECTIVITY AND REMOTE MONITORING FUNCTIONALITY
- » VIDEO MOTION SEARCH ALLOWS SEARCH BACK THROUGH RECORDINGS FOR MOVEMENT IN A SPECIFIC AREA OF THE IMAGE
- » WEB BASED CONFIGURATION ALLOWS REMOTE SYSTEM ADJUSTMENTS NEGATING THE NEED FOR SITE VISITS.
- » MULTIWAY DUOVIEW FOR LIVE AND RECORDED VIEWING SIMULTANEOUSLY
- *Applies to 600GB models recording at factory default setting of 6PPS with 18KB file size



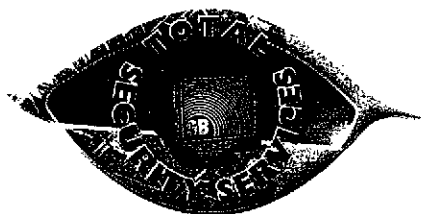


www.gbalarms.com

KBS3A Remote Keyboard

Data Sheet GBA-PR108

September 05

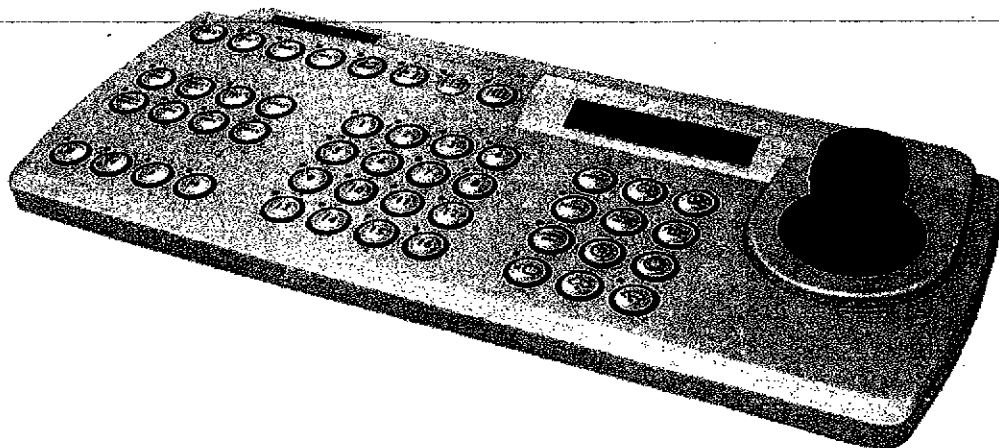

TELEMETRY DATA

Built-in RS485/Twisted pair protocols provide direct control of the following domes:

- Dedicated Micros Dennard 2040 to Dennard 2060
- JVC TK-C675BE, TK-C676 & TK-C553E
- Ultrak Ultradome™ KD6
- Ademco Orbiter & Jupiter Microspheres™
- GE CyberDome™
- BBV RS485 StarCard
- Bosch/Philips G3
- Ernitec
- Mark Mercer
- Panasonic WV-CS850A, WV-CS854, WV-CW860 external
- Sensormatic SpeedDome™ IV & SpeedDome™ V (with 4-wire RS-422 support)
- Pelco P Spectra II, Spectra III
- Samsung SCC-641
- Vista Power Dome
- Vantage Juno Dome

COAX TELEMETRY

- BBV
 - BBV RX100
- (protocol converter for control of major manufacturer's domes)
- Pelco Spectra II & III
- (Please note that patrol modes are not available)

REMOTE KEYBOARD OPTION


Keyboard features include:

- Joystick control of telemetry camera with twist zoom facility
- Wash/wipe, focus, iris, lamps, preset, patrol and auto-pan keys
- Up to 16 DS2 units can be controlled from one keyboard – up to 16 keyboards can be connected to the 485 BUS providing a flexible configuration e.g.: 1 unit can be connected to 16 keyboards
- Onboard LCD identifying connected unit name and number
- May be connected directly or remotely via 485 BUS cabling (please note maximum cabling distance is 1500 meters)

IR REMOTE CONTROL

Provides operator with remote front panel control of single or multiple racked units including:

- The ability to change cameras and camera views
- Search using the GOTO function and review of the event list
- Playback of images from the hard disk

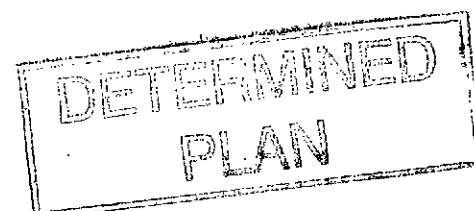

G.B. Alarms - setting the standards