


IGNIS

- Choice of front frame styles
- Robust die cast aluminium construction
- IP65 dust tight and water jet proof
- Low glare 45° louvre grille options
- Tough and vandal resistant
- Tamper resistant fixings

The functional and attractive Ignis range of wall mounted luminaires provides efficient illumination in numerous applications. Constructed from vandal resistant die cast aluminium and with tamper resistant fixings, the range is particularly suited to public areas. Louvre grille front panel versions offer safe, yet discreet illumination of steps, stairs and pathways, with the robust grille providing excellent protection from knocks and foot damage. The IP65 rating ensures there is no water penetration when these areas are hosed clean. Ignis is stylish as well as functional and can be usefully employed to illuminate doorbells and door entry systems. Frosted glass versions offer increased illumination for pedestrian areas and gardens.

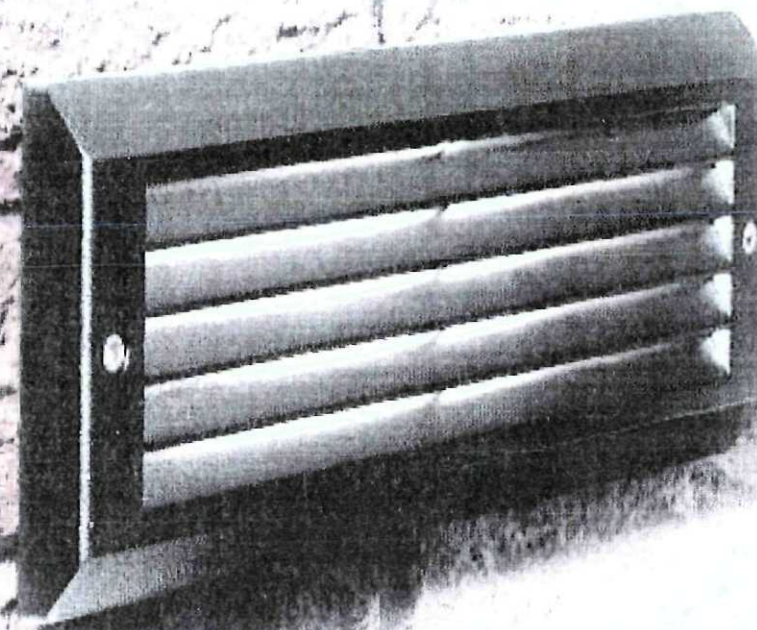

WHERE TO USE IGNIS

- Wall wash
- Path and permeability
- Stairs
- Public areas
- Street lighting
- Entrances
- Entrances and exits
- Entrances and exits
- Entrances and exits



April 07/06.

DETERMINED
PLAN

IP65



LAMP OPTIONS

- 18W TCU compact fluorescent 3500°K - 2G11 base
- 26W TCU compact fluorescent 3500°K - G24q3 base




MATERIALS

- Body: anodized cast aluminium, anodizing chromate pre-treatment, powder coated in black finish
- Frame: pressure die cast aluminium, anodizing chromate pre-treatment, powder coated in black finish
- Reflector: anodized aluminium
- Lens: high impact polycarbonate with horizontal lines profile
- Broom/brush: polypropylene with coloured white

INSTALLATION NOTES

- Suitable for wall mounting
- recessed into wall with recessing plate (order separately)
- Slows to be cast into cavity, cut out 31/2 x 1 1/2 x 1 1/2 in.
- Body screw fixed to clear
- Removable entry
- 3 way 1x2, 3mm terminal block
- Frame is retained by allen key screws
- Supplied complete with lamp

DIMENSIONS



Description	L (mm)	W (mm)	D1 (mm)	D2 (mm)
Body only	440	170	40	40
Body + reflector	440	170	40	40



fits with glass panel


OPTIONS

- Switch start control gear is standard

SPECIFICATION

The range offers die cast aluminium wall mounted recessed luminaires with choice of frosted high impact glass lens with linear prism horizontal louvre die cast aluminium grille - vertical frame - choice of anodized grille from panel - recessed for lamp socket - after 1000 hours of light and water proof to IP65 - with 1 pin 1 pin range - price on request


PHOTOMETRIC DATA

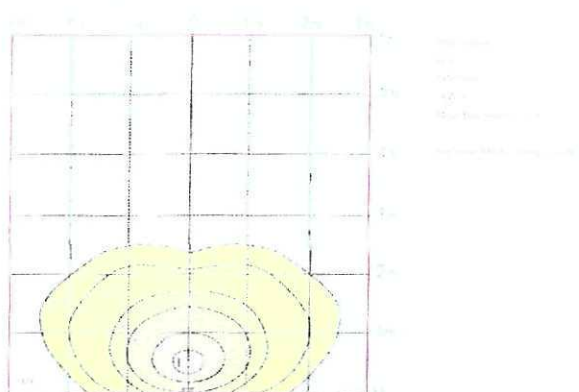

CATALOGUE NUMBERS

Description	1 x 18W TC-U	1 x 26W TC-D	Weight (kg)
Body only	80718CT	80726CT	0.15
Wall lamp and frame	80718CT	80726CT	0.15
Wall mounted frame	80718CT	80726CT	0.15

Description	Cat. No.	Weight (kg)
Recessing device	80718CT	0.15

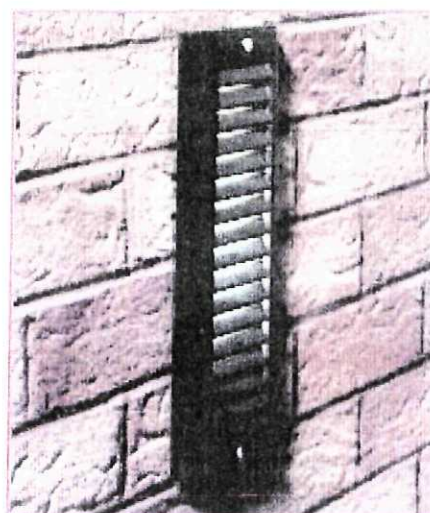

fits with vertical louvre

Exterior

DETERMINED
PLAN