SPALDING PRIVATE PRACTICE

V-SHAPED ROADSIDE SIGN - PLANNING APPLICATION



FRONT ELEVATION (EACH FACE)



ARTWORK DETAIL (EACH FACE)



LIGHTING DETAIL-OPTION 1 (EXTERNAL DOWN LIGHTING)




- DISCRETE, TOP-MOUNTED LED DOWN LIGHTING ON EACH FACE.
- LIGHT SOURCE CONCEALED WITHIN SLIM ALUMINUM HOOD.
- WARM WHITE LIGHT (2700K-3000K).
- DOWNWARD DIRECTED AND SHIELDED TO PREVENT GLARE AND LIGHT SPILL.
- OPERATED VIA DUSK-TO-DAWN SENSOR.
- LOW ENERGY, LONG LIFE LED.

SIDE VIEW (SINGLE POST)

SCALE 1:20 @A3

TOTAL DEPTH

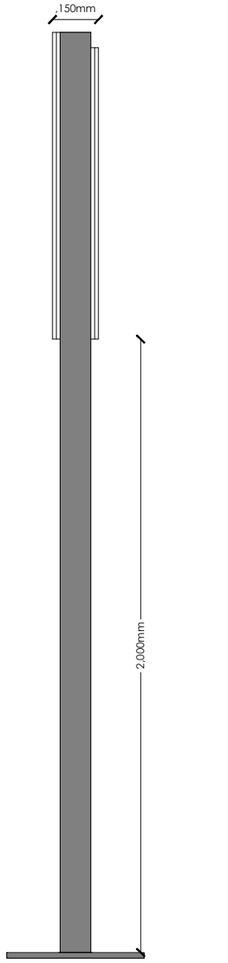

2000mm ABOVE GROUND TO BOTTOM OF SIGN

SPECIFICATION

SIGN TYPE:	V-SHAPED DOUBLE SIDED ROADSIDE SIGN
OVERALL PANEL SIZE (EACH FACE):	2000MM (W) X 1000MM (H)
VISIBLE FACE AREA (EACH SIDE):	2.0M WIDE X 1M HIGH
OVERALL HEIGHT ABOVE GROUND:	2000MM TO BOTTOM OF SIGN
POSTS:	1000MM X 100MM STEEL POSTS
MATERIAL:	ALUMINUM COMPOSITE PANEL
FINISH:	MATT
COLOR SCHEME:	SAGE GREEN AND WHITE
ILLUMINATION:	EXTERNAL TOP-MOUNTED LED DOWN LIGHTING (OPTION-1)
FIXINGS:	PANELS FIXED TO STEEL FRAME WITH CONCEALED FIXINGS

COLOR & MATERIALS

PANEL BACKGROUND	TEXT & LOGO	POSTS & FRAME
WHITE (MAT) RAL 9016	SAGE GREEN RAL 6021	SAGE GREEN RAL 6021

NOTES:

- SIGN TO BE POSITIONED WITHIN THE SITE BOUNDARY WITH ADEQUATE VISIBILITY TO THE ROADSIDE.
- NON-ILLUMINATED TO REDUCE LIGHT POLLUTION.
- ALL MATERIALS TO BE DURABLE AND WEATHER RESISTANT.
- SIGN TO COMPLY WITH LOCAL PLANNING REQUIREMENTS.

LIGHTING SPECIFICATION (OPTION 1)

LIGHTING TYPE:	EXTERNAL LED DOWN LIGHTING
POSITION:	TOP EDGE OF EACH SIGN FACE
COLOR TEMPERATURE:	2700K-3000K (WARM WHITE)
LUMINANCE:	LOW LEVEL (NON-DAZZLING)
DIRECTION:	DOWNWARD ONLY
SHIELDING:	FULLY SHIELDED - NO UPWARD LIGHT
OPERATION:	DUSK-TO-DAWN SENSOR
ENERGY SOURCE:	MAINS POWERED
COMPLIANCE:	DESIGNED TO MINIMIZE IMPACT ON NEIGHBORS AND HIGHWAY USERS, IN ACCORDANCE WITH ILP GUIDANCE NOTES FOR THE REDUCTION OF OBTRUSIVE LIGHT (GN01/21).

NOTE: ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE STATED. DRAWINGS ARE FOR PLANNING PURPOSES ONLY AND NOT FOR CONSTRUCTION.