

# SHARP

ND-RxxxA5 (60 cells)

xxx = 250|245|240|235|230 W

Polycrystalline silicon photovoltaic modules

Sharp is a pioneer in photovoltaics /This is Why Sharp solar modules have set standards for over 50 years.



### Innovations from a photovoltaic pioneer

As a solar specialist with more than 50 years of experience in photovoltaics (PV), Sharp makes significant contributions to groundbreaking progress in solar technology. Sharp photovoltaic modules in the ND series are designed for applications with high power requirements. All Sharp ND series modules offer system integration which is optimal both technically and economically, and are suitable for installations in on- and off-grid PV systems.



AWARDS FOR BRAND AWARENESS, BRAND EVALUATION, INSTALLERS' CHOICE AND DISTRIBUTION.

### Certificates and approvals

All modules are tested and certified according to

- IEC/EN 61215 und IEC/EN 61730, Anwendungsklasse A
- Schutzklasse II/CE
- MCS accredited product (MCS PV0007)

Sharp is certified based on

- ISO 9001:2008 und ISO 14001:2004


### Product features

- High-performance photovoltaic modules made of polycrystalline (156.5 mm)<sup>2</sup> silicon solar cells with module efficiencies of up to 15.2%.
- 3 busbar technology for enhancing the power output.
- Anti-reflex coating to increase light absorption.
- Production controlled positive power tolerance from 0 to +5%. Only modules will be delivered that have the specified power or more for high energy yield.
- Delivery of modules in 5-watt intervals.
- Improved temperature coefficient to reduce power losses at higher temperatures.
- High power performance even at lower irradiances.

### Quality from Sharp

Continual checks guarantee a consistently high level of quality. Every module undergoes visual, mechanical, and electrical inspection. This is recognisable by means of the original Sharp label, the serial number, and the Sharp guarantee:

- 10-year product guarantee
- 25-year linear performance guarantee
  - Minimum 96% of the specified minimum power output during the first year
  - Maximum 0.667% annual reduction of the power output for following 24 years

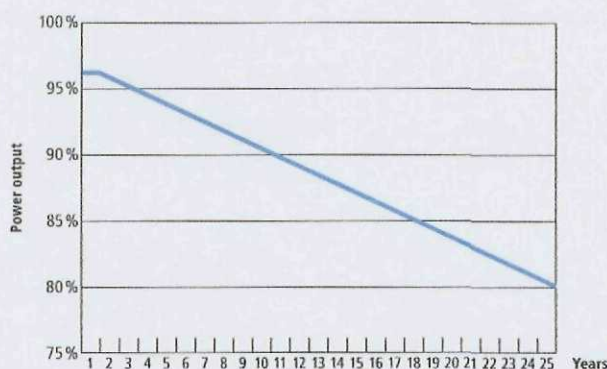

Passed DLG  
resistance-to-  
ammonia test



Passed salt mist  
corrosion test  
(IEC 61701)

## ELECTRICAL DATA (AT STC)

|                                   |           | ND-R250A5 | ND-R245A5 | ND-R240A5 | ND-R235A5 | ND-R230A5 |       |
|-----------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-------|
| Maximum power                     | $P_{max}$ | 250       | 245       | 240       | 235       | 230       | $W_p$ |
| Open-circuit voltage              | $V_{oc}$  | 37.6      | 37.3      | 37.2      | 36.8      | 36.4      | V     |
| Short-circuit current             | $I_{sc}$  | 8.68      | 8.62      | 8.57      | 8.49      | 8.41      | A     |
| Voltage at point of maximum power | $V_{mpp}$ | 30.9      | 30.7      | 30.4      | 30.3      | 30.3      | V     |
| Current at point of maximum power | $I_{mpp}$ | 8.10      | 7.99      | 7.90      | 7.76      | 7.61      | A     |
| Module efficiency                 | $\eta_m$  | 15.2      | 14.9      | 14.6      | 14.3      | 14.0      | %     |

STC = Standard Test Conditions: irradiance 1,000 W/m<sup>2</sup>, AM 1.5, cell temperature 25 °C.

Rated electrical characteristics are within ±10% of the indicated values of  $I_{sc}$ ,  $V_{oc}$  and 0 to +5% of  $P_{max}$  (power measurement tolerance ±3%).

## ELECTRICAL DATA (AT NOCT)

|                                    |           | ND-R250A5 | ND-R245A5 | ND-R240A5 | ND-R235A5 | ND-R230A5 |       |
|------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-------|
| Maximum power                      | $P_{max}$ | 180.2     | 176.6     | 173.0     | 169.3     | 165.7     | $W_p$ |
| Open-circuit voltage               | $V_{oc}$  | 36.7      | 36.4      | 36.4      | 36.0      | 35.6      | V     |
| Short-circuit current              | $I_{sc}$  | 7.0       | 6.96      | 6.92      | 6.85      | 6.79      | A     |
| Voltage at point of maximum power  | $V_{mpp}$ | 27.7      | 27.5      | 27.2      | 27.1      | 27.1      | V     |
| Nominal Operating Cell Temperature | NOCT      | 47.5      | 47.5      | 47.5      | 47.5      | 47.5      | °C    |

NOCT: Module operating temperature at 800 W/m<sup>2</sup> irradiance, air temperature of 20 °C, wind speed of 1 m/s.

## LIMIT VALUES

|                         |                        |
|-------------------------|------------------------|
| Maximum system voltage  | 1,000 V DC             |
| Over-current protection | 15 A                   |
| Temperature range       | -40 bis +90 °C         |
| Maximum mechanical load | 2,400 N/m <sup>2</sup> |

## MECHANICAL DATA


|        |                      |
|--------|----------------------|
| Length | 1,652 mm (+/-3.0 mm) |
| Width  | 994 mm (+/-2.0 mm)   |
| Depth  | 46 mm (+/-0.8 mm)    |
| Weight | 19 kg                |

## TEMPERATURE COEFFICIENT


|           |               |
|-----------|---------------|
| $P_{max}$ | -0.440 % / °C |
| $V_{oc}$  | -0.329 % / °C |
| $I_{sc}$  | +0.038 % / °C |

## CHARACTERISTIC CURVES ND-R250A5

Characteristic curves: current/power vs. voltage (cell temperature: 25 °C)

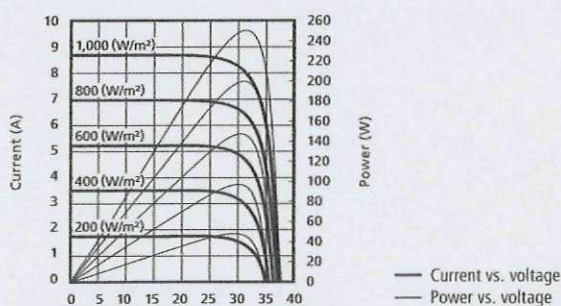

## REAR VIEW

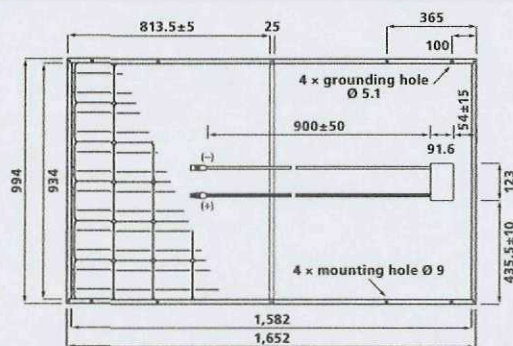

## GENERAL DATA

|                |                                                                                                                                                                                                                                    |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cells          | polycrystalline, 156.5 mm × 156.5 mm, 60 cells in series                                                                                                                                                                           |
| Front glass    | low iron tempered glass, 3 mm                                                                                                                                                                                                      |
| Frame          | anodized aluminium alloy, silver                                                                                                                                                                                                   |
| Connection box | PPE/PPO resin, IP65 rating, 58 × 125 × 15 mm, 3 bypass diodes                                                                                                                                                                      |
| Cable          | 4 mm <sup>2</sup> , length 900 mm                                                                                                                                                                                                  |
| Connector      | SMK (MC4 compatible), Type CCT9901-2361F/2451F (Catalogue no. P51-7H/R51-7), IP67 rating<br>To extend the module connection leads, only use SMK connector from the same series or MultiContactAG MC4 connector (PV-KST04/PV-KBT04) |

## REGISTRATION

Sharp Solar guarantees the safety, quality and value of your product over many years – the only thing we ask you to do is to register your modules with the serial number, so that we can send you the guarantee certificate. Register your modules quickly and easily at [www.brandaddedvalue.net](http://www.brandaddedvalue.net).

Sharp Energy Solution Europe · a division of Sharp Electronics (Europe) GmbH · Sonninstrasse 3, 20097 Hamburg, Germany · Tel: +49(0)40/23 76-0 · Fax: +49(0)40/23 76-2193

[www.sharp.eu/solar](http://www.sharp.eu/solar)

**SHARP**

Local responsibility:

Austria SolarInfo.at@sharp.eu  
Benelux SolarInfo.seb@sharp.eu  
Central & Eastern Europe SolarInfo.scee@sharp.eu  
Denmark SolarInfo.dk@sharp.eu  
France SolarInfo.fr@sharp.eu

Germany SolarInfo.de@sharp.eu  
Scandinavia SolarInfo.sen@sharp.eu  
Spain & Portugal SolarInfo.es@sharp.eu  
Switzerland SolarInfo.ch@sharp.eu  
United Kingdom SolarInfo.uk@sharp.eu

The reference image on the front page shows a 13 kWp system in Northern Germany. Note: Technical data is subject to change without prior notice. Before using Sharp products, please request the latest data sheets from Sharp. Sharp accepts no responsibility for damage to devices which have been equipped with Sharp products on the basis of unverified information. The specifications may deviate slightly and are not guaranteed. Installation and operating instructions are to be found in the corresponding handbooks, or can be downloaded from [www.sharp.eu/solar](http://www.sharp.eu/solar). This module should not be directly connected to a load.

SolarND\_60A5\_E0412