6.0 Attract

6.15 Projecting Signs


a. Standard Projecting sign – illuminated – Preferred option


Size: 650mm Diameter

Construction: Bracket constructed from 10mm mild steel with 3mm thick ring, welded to bracket. Face panels are 3mm thick moulded 050 opal acrylic face decorated with red and black vinyl. An even and bright level of illumination needs to be achieved.

Application: Sign is to be installed on a prepared fascia on external elevations of the branch. The sign weighs approximately 12kg. The quantity and type of fixings used should be appropriate for the building material facade to ensure the sign is secure and also that a level sign is achieved.

Artwork ref: RLT – (original artwork only to be used)

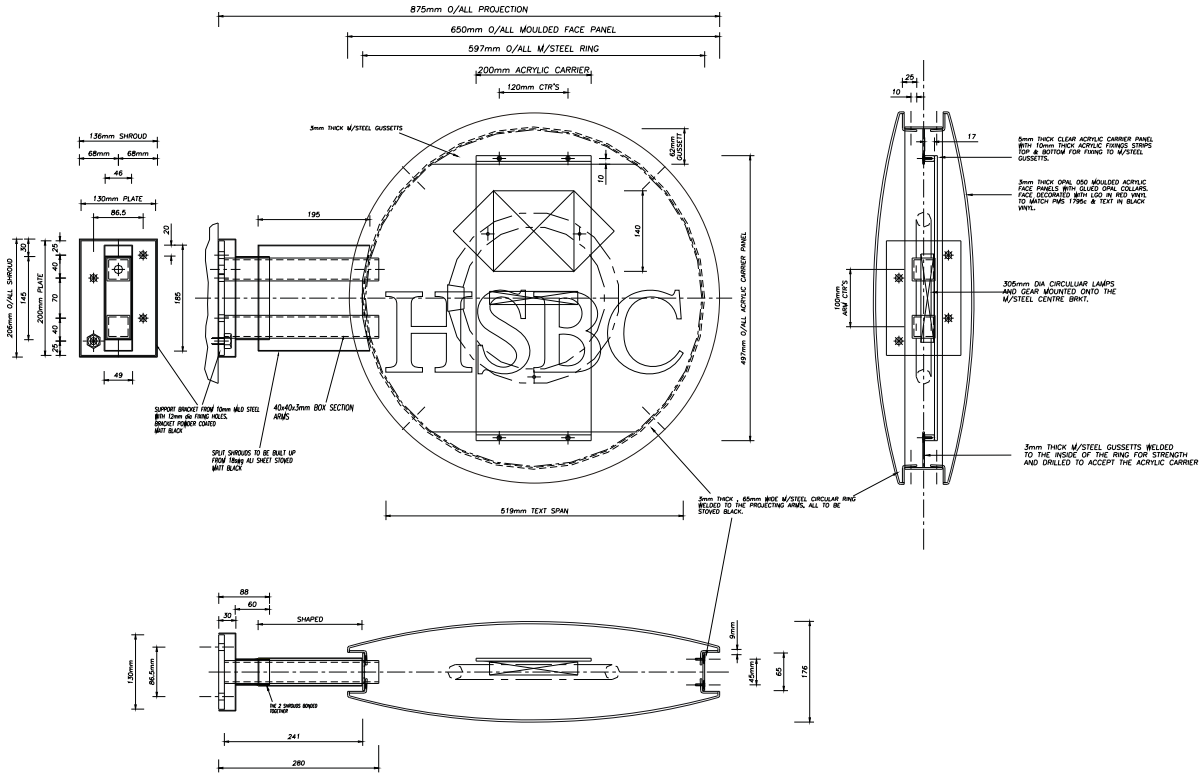

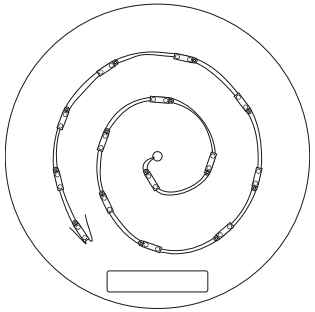

Typical position of the LEDs
on a clear acrylic panel 3.5 metres per side

