




ground floor layout

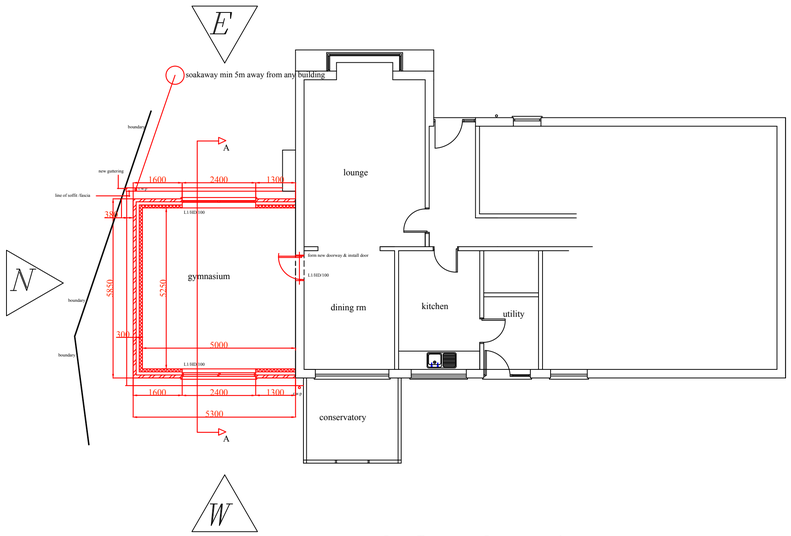


east elevation

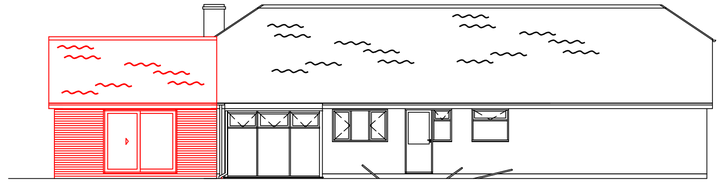

west elevation

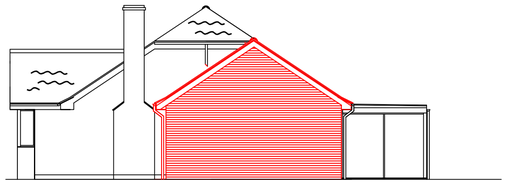

north elevation




ROOF FINISH
Clay pan tiles on battens
Kingspan Nilvent or similar
Trussed Rafters to span 5127.5mm (check on site).
100mm mineral fibre insulation betweeen ceiling joists.
170mm mineral fibre insulation laid across and the over the top of ceiling joists
Plasterboard + skim

FOUNDATIONS
600mm x 250mm concrete foundations
to cavity walls (Concrete grade ST/2)

GROUND FLOOR
65mm sand/cement screed on 100mm over site concrete on
85mm Kingspan Kooltherm K3 Floorboard
Insulation boards should be overlaid with polythene vapour layer linked into horizontal DPC on
150mm sand blinded consolidated hardcore.


section A–A

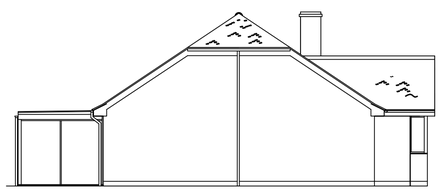

south elevation

DO NOT SCALE THIS DRAWING. THE CONTRACTOR IS DEEMED TO HAVE CHECKED ALL DIMENSIONS

ANY DIMENSIONS NOT SHOWN ARE TO BE CHECKED



scale

Notes

Revision	Notes	Date	Signed	Checked

3 Saxony Way
Donington,
PE11 4AY

Approvals:

Building Control: 20.03.2019
Planning: 21.05.2019

APPROVED

Project:

Proposed Extension
to form Gymnasium

Drawing Title:

Proposed Layout/ Elevations

Date:		Scale:	
Feb 2019		1:00 @ A1	
Drawn by: N.A.O	Date: Feb 2019	Checked by:	Date:

Drawing Number: 19/SW/04

Rev:

Project Number: