



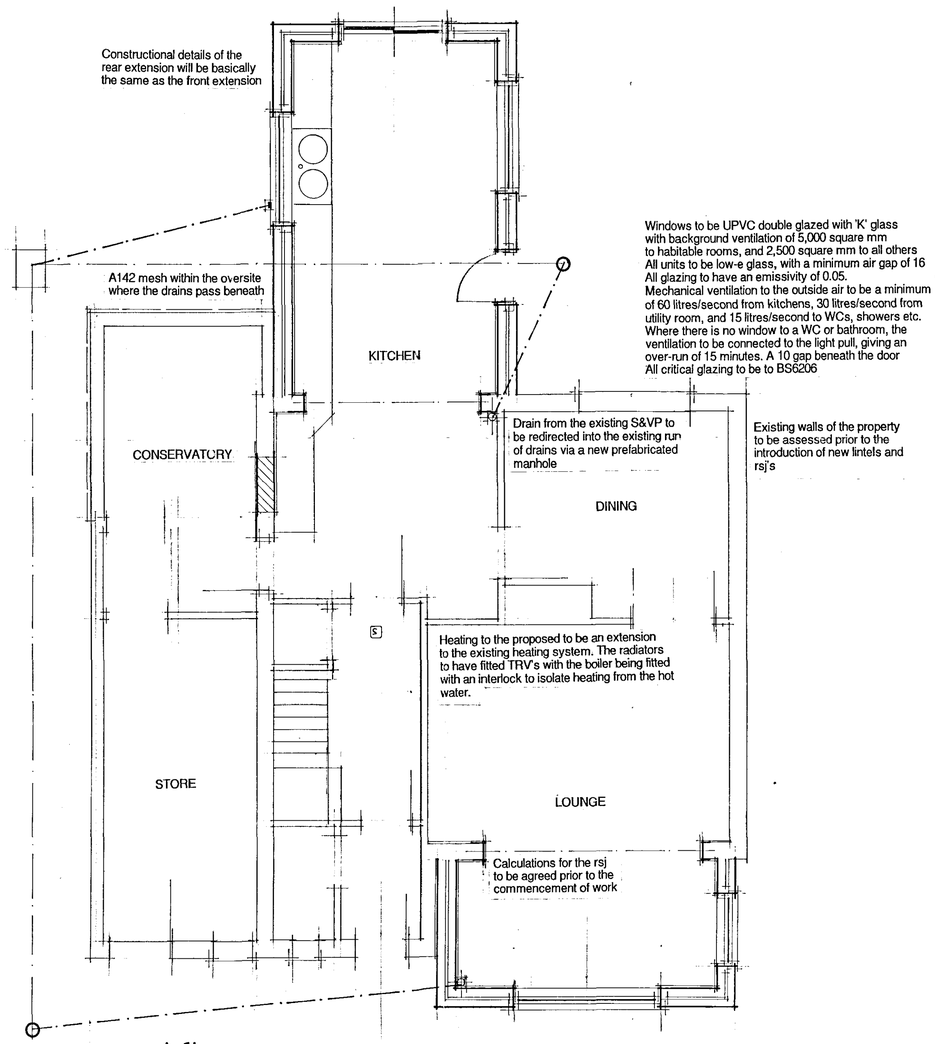

ground floor

Drains from the extension to be taken into the existing drain run. The drains will be laid to suitable falls, in peastone with flexible joints. Prefabricated manholes and rodding eyes as indicated, with all the drains being to BS 4660 & 5481
Drains taken into existing septic tank

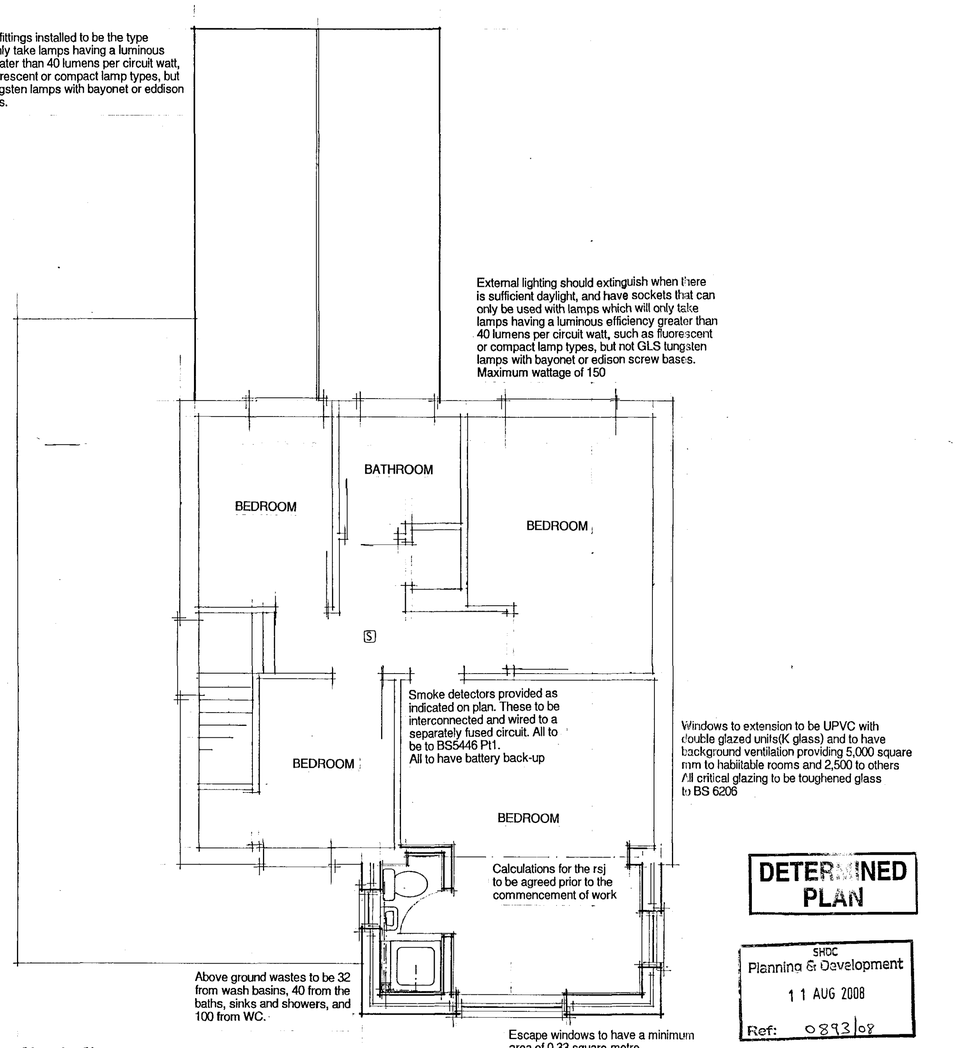

first floor

Windows to extension to be UPVC with double glazed units(K glass) and to have background ventilation providing 5,000 square mm to habitable rooms and 2,500 to others
All critical glazing to be toughened glass to BS 6206

DETERMINED PLAN

SHDC
Planning & Development
11 AUG 2008
Ref: 0893/08

All electrial work is required to meet the requirements of Part P (Electrical Safety)
It must be designed, installed inspected and tested by a person who is competent to do so.
Prior to the completion of the work, the Council should be satisfied the Part P has been complied with fully.
This may require an appropriate BS7671 electrical installation certificate to be issued for the work, by a person competent to do so

NOTES:

All dimensions must be checked on site and not scaled from this drawing.

© pyright

is drawing is the copyright of Stephen Bush
d can only be reproduced with his written
rmission.

Client
MR & MRS T.BROCKLEHURST

Job title
MALLARD HURN FARMHOUSE
MALLARD HURN
DONINGTON

EXTENSIONS TO FRONT & REAR

Stephen A C Bush
Architectural and Property Consultant
Bramble Lodge
Brick Kiln Road
Hevingham
Norfolk NR10 5NL
Tel/Fax: (01603) 754556

Scale 1.50 1.100

Date AUGUST 08 | Drawn by SACB

Drg. No. TB-01-1 | Rev.

H&K 124

594 x 841mm A1