

JC39202SS

NiteLED™ Dome

NiteLED™ Mains IP44 Medium Louvred Bollard Unlamped E27 St/St

Features & Benefits

- E27 lamp holder
- Root mount kit available
- Suitable for LED lamps
- Suitable for halogen lamps



WARRANTY



CLASS I



RATING

General Information

Mounting

Environment

Product Group

Product Range

Trade Name

Color Finish

Product Shape

Product Weight(kg)

Light Source

Luminaire Accessories

Recommended Product Location

Method Of Fix

IP Rating

Warranty

Surface Mounted

Outdoor

Bollard

NiteLED™

NiteLED™

Stainless Steel

Cylinder

7.35

E27 Lamp

Root Mounting kit (JC39224)

External Use, Walkways, Drive Ways etc.

Fix Using Anchor Bolts (Supplied)

IP44

2 year standard warranty (See Website for terms and conditions)

Lighting Product Type 1

Exit Lighting

Electrical

Voltage Rating

220-240

Operating Frequency Hz

50/60Hz

Luminaire Circuit Wattage

25W LED max or 70W Halogen max

Class

I

Input Electrical Connections

Live, Earth, Neutral

Dimmable

No

Lampholder

E27

Thermals

Operating Temperature Range °C

0 to +26

Performance Data

Energy Rating

This product can contain a suitable light source of energy efficiency class from A to G

Actual Lumen Output

Depending on lamp

Construction

Primary Material

Stainless Steel

Lens

Opal polycarbonate

Packaging

Product Bar Code EAN-13 Number

5052544017537

Standards & Approvals

Manufactured In Accordance To

BS EN 60598-2-1

UKCA Marked

Yes

Date code/Purchase order No.

Yes

WEEE Symbol



Yes

Certificate Of Conformity

Available on request

Accredited Members

LIA, ISO9001-2015, ISO14001-2015

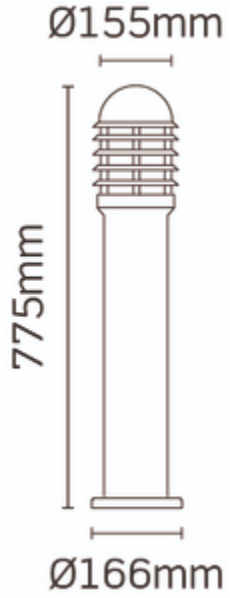

JCC Lighting LTD Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex PO22 9TS
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 58 [01 Nov 2021]