
H.M. LAND REGISTRY


LL 152987

ORDNANCE SURVEY PLAN REFERENCE	TF 3612	Scale 1/2500
COUNTY LINCOLNSHIRE	DISTRICT SOUTH HOLLAND	© Crown copyright

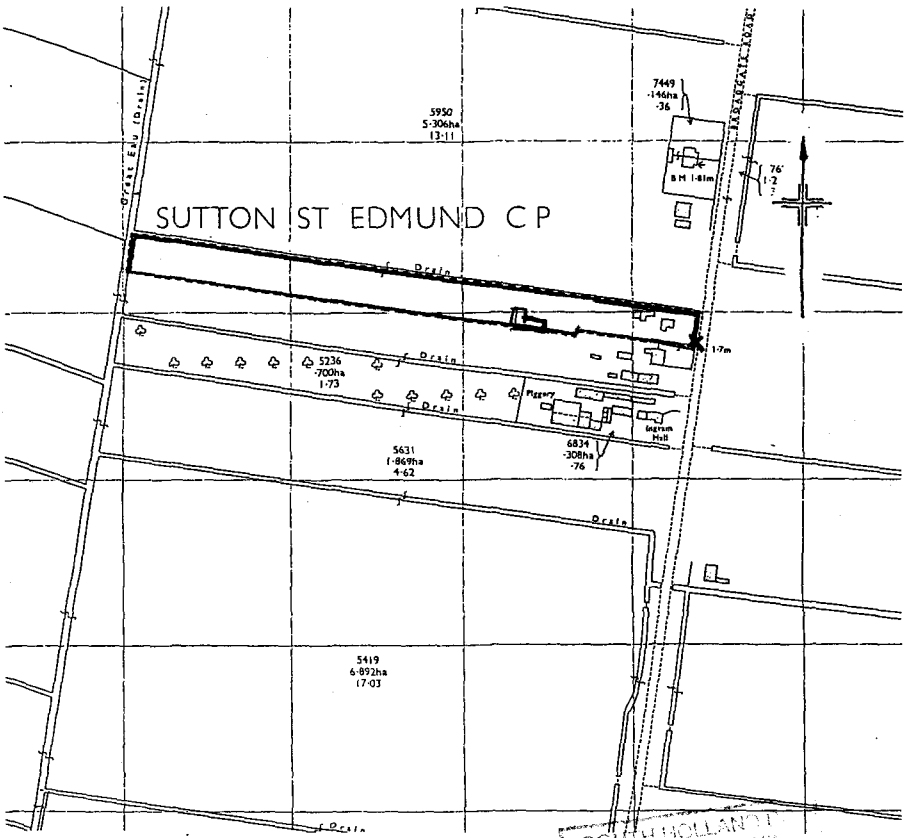


SOUTH HOLLAND DISTRICT COUNCIL
HOUSING & PLANNING
28 MAR 2005
0336/00

DETERMINED PLAN

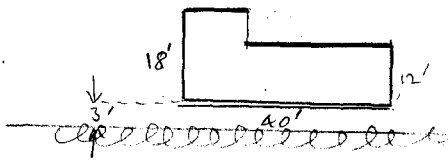


CERTIFIED TO BE A TRUE COPY OF THE FILED PLAN
H.M. LAND REGISTRY
4/98

INGS BY PASSMORES

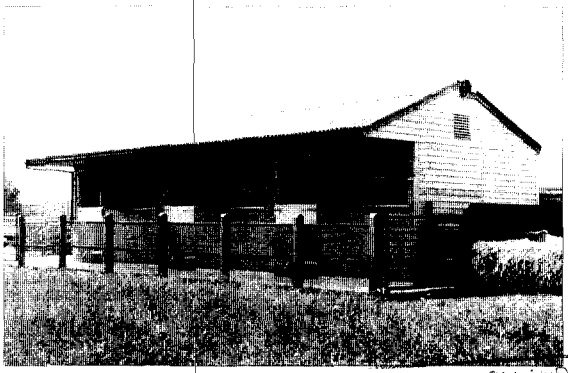


▲ 3 3.6m x 3.6m loose boxes. Onduline roof.


SOUTH HOLLAND DC
HOUSING & PLANNING
20 MAR 2000
Ref: 0336/00

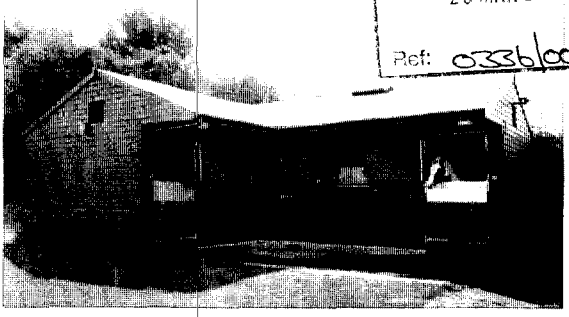

▲ 'L' shaped block. 3.6m x 3.6m loose box, 3.0m x 3.6m loose box and 4.8m x 3.6m corner store. Extra treatment in Sadolins Teak.




◀ On larger configurations a walk through provides an escape route and improved access around the building.

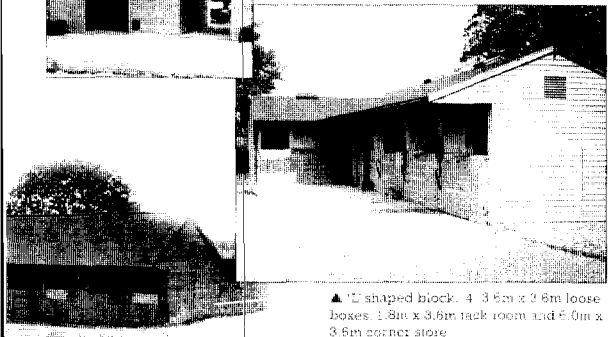

▲ 'L' shaped block. 4 3.6m x 3.6m loose boxes. 1.8m x 3.6m tack room and 6.0m x 3.6m corner store.


FEATURES




Loose box door.

- 1.20m width.
- 22mm Tanalised t&g cladding.
- 1.0mm galvanised anti-bite protection.
- 0.6m galvanised hinges.

Opening Window.
1.06m x 0.87m opening window with galvanised welded steel grill.






Exterior Cladding.
19mm x 139mm Passmore pattern (deep rebate) planed redwood shiplap with lifetime pressure preservative treatment in eco-friendly Tanalith E. (Free from chrome and arsenic ingredients).

TANALITH E


Kicking Boards.
15mm exterior grade OSB (oriented strand board) kicking boards to 1.22m height. Sturdy and safe. Can be pressure cleaned.





◀ Gable end & ridge ventilators.


Ventilation.
Upward opening windows promote a draft free flow of fresh air. Stale air warmed by the horse rises to the roof to escape through the ventilators carrying away dust and other pollutants.




H.M. LAND REGISTRY

LL 152987


ORDNANCE SURVEY PLAN REFERENCE	TF 3612	Scale 1/2500
COUNTY LINCOLNSHIRE	DISTRICT SOUTH HOLLAND	© Crown copyright

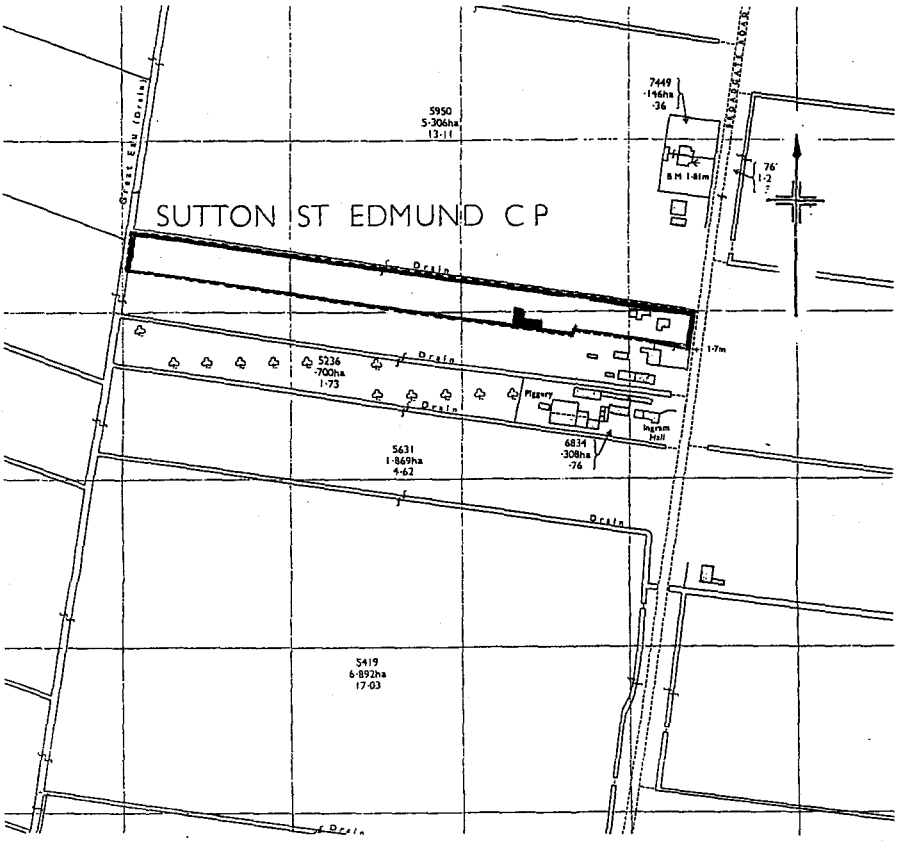

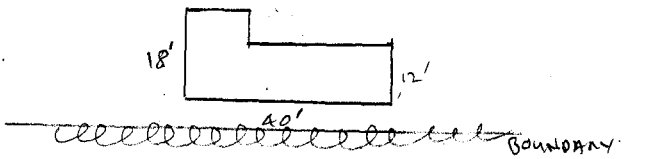


CERTIFICATE COPY OF FILED PLAN
H.M. LAND REGISTRY
M.O.R.
4/98


INGS BY PASSMORES

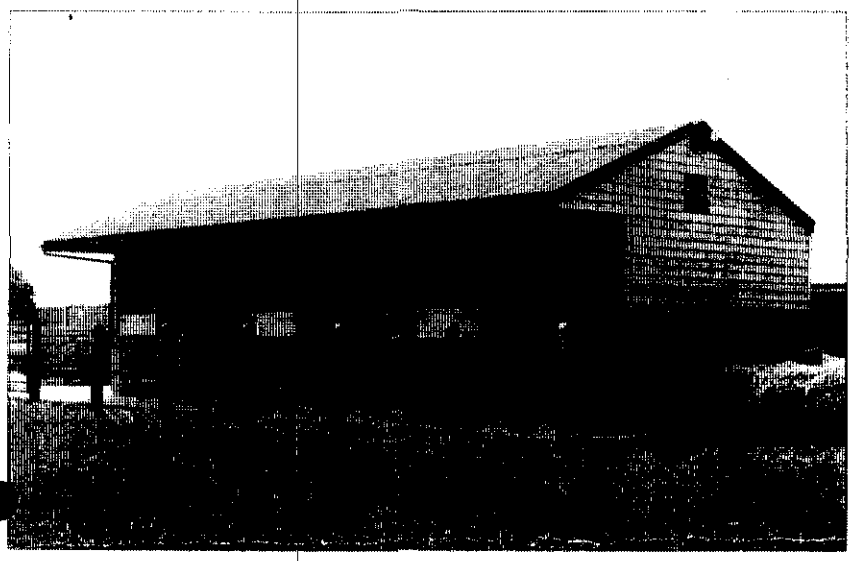


▲ 3 3.6m x 3.6m loose boxes. Onduline roof.

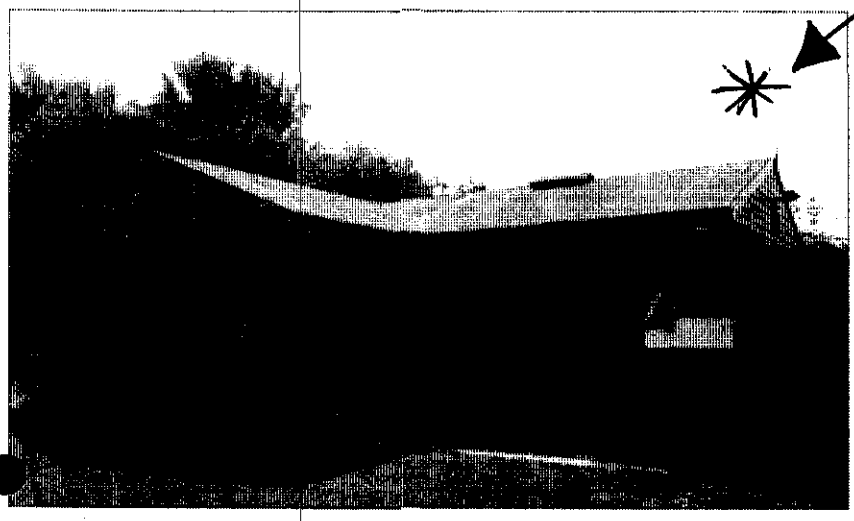

▲ 'L' shaped block. 3.6m x 3.6m loose box, 3.0m x 3.6m loose box and 4.8m x 3.6m corner store. Extra treatment in Sadolins Teak.




◀ On larger configurations a walk-through provides an escape route and improved access around the building.

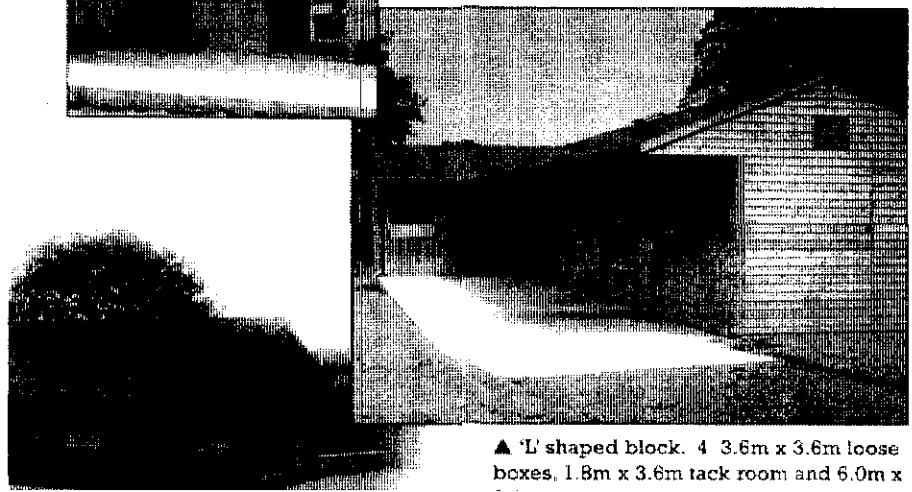

▲ 'L' shaped block. 4 3.6m x 3.6m loose boxes, 1.8m x 3.6m tack room and 6.0m x

FEATURES




Loose box door.

- 1.20m width,
- 22mm Tanalised t&g cladding,
- 1.0mm galvanised anti-bite protection,
- 0.6m galvanised hinges.

Opening Window.
1.06m x 0.87m opening window with galvanised welded steel grill.





Exterior Cladding.
19mm x 125mm Passmore pattern (deep rebate) planed redwood shiplap with lifetime pressure preservative treatment in eco-friendly Tanalith E. (Free from chrome and arsenic ingredients).

TANALITH E

Kicking Boards.
15mm exterior grade OSB (oriented strand board) kicking boards to 1.22m height. Sturdy and safe. Can be pressure cleaned.





◀ Gable end & ridge ventilators.

Ventilation.
Inward opening windows promote a draft free flow of fresh air. Stale air warmed by the horse rises to the roof to escape through the ventilators, carrying

