

SIDE ELEVATION

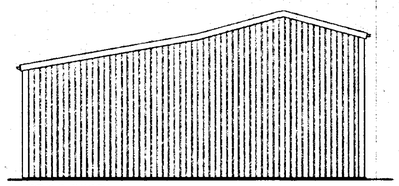

FRONT ELEVATION

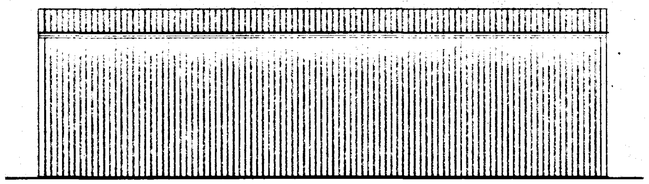

SIDE ELEVATION

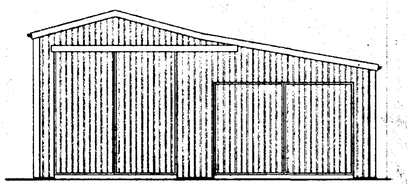

FRONT ELEVATION

CLADDING
Form all vertical cladding of 0.9mm thick Plastisol coated trapezoidal profile galvanised steel Cladding system fixed to "Ward Building Components Ltd." or similar galvanised steel purlins spaced to Structural Engineer recomendations. All fixed in accordance with manufacturers instructions.

SURFACE WATER DRAINAGE.
110mm dia. half round rainwater gutters to 75mm dia. rainwater pipes 110mm dia. underground pipes flexibly jointed to a fall of 1:70 pipes bedded and surrounded in pea gravel and discharge to 1.2m dia. soakaway min. 9.0m to edge from dwelling.

PITCHED ROOF
Form pitched roof covering of 0.7mm thick Plastisol coated trapezoidal profile galvanised steel Cladding system fixed to "Ward Building Components Ltd." or similar galvanised steel purlins spaced to Structural Engineers recomendations. All fixed in accordance with manufacturers instructions

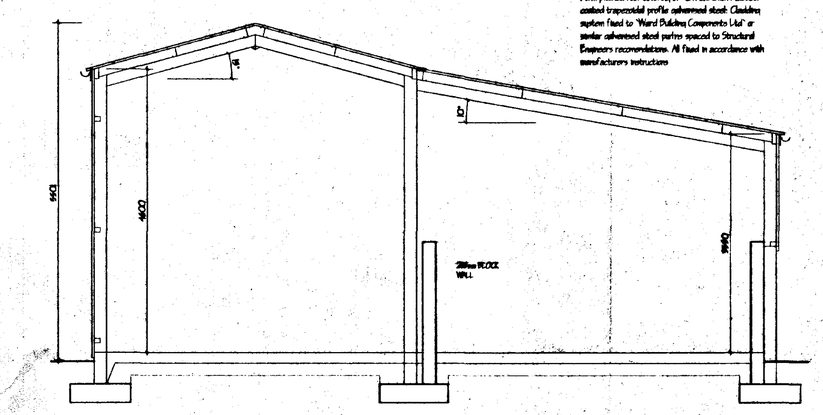

SECTION

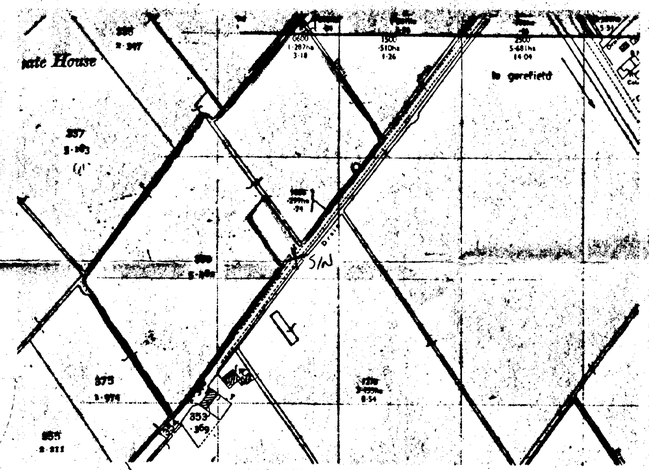
Gate House
Bungalow
Bungalow
Bungalow