
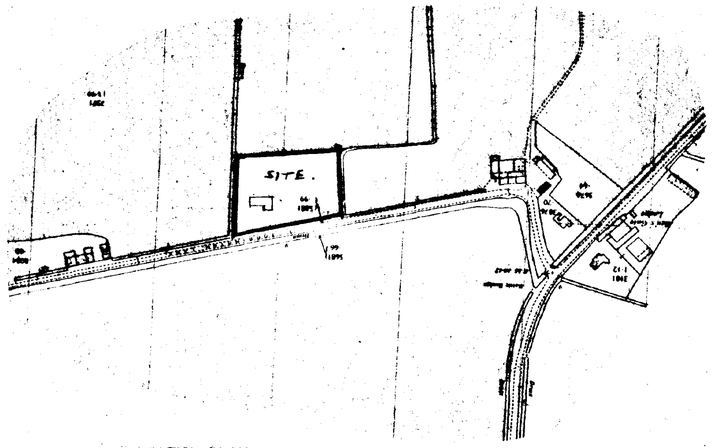


LOCATION PLAN

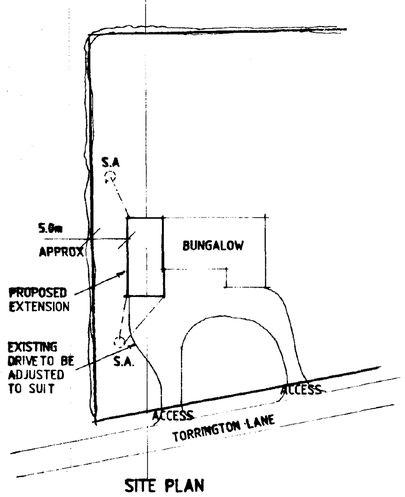

SITE PLAN

ROOF CONSTRUCTION
Concrete interlocking roof tiles (see site plan) on 38 x 25 softwood treated timber battens on underfelt to BS747 (Type 1F) lapped 150mm horizontally and 100mm vertically. Prefabricated roof trusses at 600mm c/c and pitch as stated in accordance with BS5268 Part 3, 1985. Provide 25 x 100mm timber bracing and fix in accordance with truss manufacturers instructions. All trusses and gable ladders (if any) to be strapped to 50 x 100mm timber wallplate, the gable wall at verges and ceiling level with 30 x 5mm mild steel anchor and lateral restraint straps to span minimum 3 no. trusses at a maximum of 1200mm c/c. At strap positions provide pack and noggins to trusses. Main contractor to supply local authority building control with roof truss calculations 28 days prior to erection on site.

ROOF VENTILATION
At eaves provide proprietary ventilation equivalent to a 10mm continuous gap along eave.

ROOF INTERSECTIONS
If compound truss used, where main trusses fix to compound truss provide proprietary truss connectors. Provide 32 x 175mm valley lay boards and fix reducing trusses over to complete roof intersection. Fix in accordance with roof truss manufacturers instructions.

FASCIA AND BARGEBOARDS
To be 25 x 175mm PSE with 6mm groove to accept 6mm thick exterior grade plywood soffit.

ROOF INSULATION
To roof spaces provide proprietary 200mm thick insulation laid as 100mm between joists and 100mm across joists. Ensure a gap of 50mm between roof underfelt and quilt at all times.

VALLEYS
Use proprietary fibreglass valleys or provide Code 4 lead to valleys to make completely watertight.

CEILINGS
To all insulated roof ceilings provide 12.5mm Gyproc Duplex plasterboard or similar and either 5mm skim or Artex finish. To remaining ceilings provide 12.5mm Gyproc plasterboard or similar with finishes as above

GROUND FLOOR CONSTRUCTION
65mm sand/cement screed on proprietary 50mm thick floor insulation with perimiter insulation to screed on 1200 gauge polythene d.p.m. on 100mm concrete oversite on minimum 150mm, maximum 600mm well blinded and compacted hardcore. Wall d.p.c. to lap floor d.p.m. by a minimum of 50mm.

REVEALS
Ensure the path through all window and door reveals, including lintels, is limited to a minimum 'U' value of 1.2W/m²K. also at every closure of cavity provide d.p.c.

WALL CONSTRUCTION
275mm cavity walls to consist of:-
100mm face brickwork (see site plan for details), 75mm cavity to be filled with Crown Dritherm full fill insulation in accordance with BBA Certificate No. 86/1678 or similar approved, 100mm internal skin of Tarmac Hemelite blockwork. Cavity walls tied together using galvanised iron or plastic twist ties spaced 900mm horizontally and 450mm vertically to BS1243, 1978. Internal blockwork walls to receive 10mm sand/cement render and skim finish.

IRRITTABLE ROOM TRICKLE VENTILATION
Provide proprietary trickle ventilators to head of windows giving,a total opening area of not less than 8000mm²

LINTELS
All coded lintels as stated in Schedule or marked on plan to be by
to be installed in strict accordance with manufacturers instructions. Form d.p.c. cavity tray above all lintels. To all exposed lintels i.e. not sheltered from overhanging eaves, etc. to have proprietary weepholes to joints of brickwork at approx. 450mm c/c.

GARAGE FLOOR CONSTRUCTION
100mm concrete oversite on 1200 gauge polythene d.p.m. on minimum 150mm, maximum 600mm well blinded and compacted hardcore.
If garage is integral to house finished floor level to be 100mm below that of house. Wall d.p.c. to lap floor d.p.m. by a minimum of 50mm.

NEW/OLD WALLING
Where new walling meets old provide proprietary vertical flexible wall starters.

BATHROOM VENTILATION
Provide proprietary mechanical extract ventilation unit capable of extracting 15lts/second. System to offer intermittent operation.

FOUL WATER DRAINAGE
Underground drainage to be proprietary 110mm diameter P.V.C. pipes flexible jointed to fall 1:70 bedded in 100mm pea gravel. Under building drains to be encased in 150mm pea gravel with lintel over pipes at wall abutments. Surround pipes at wall abutments with 50mm compressible material. 110mm diameter soil and vent pipe to extend 900mm above window head and to terminate in balloon finial. Soil and vent pipe to be fitted with access plate at base. Provide suitably sized wastes from all appliances (in accordance with Approved Document H) complete with minimum 75mm deep sealed traps and rodding eye access points at every direction change. All above ground drainage to BS5572 and all underground drainage to BS8301.

SURFACE WATER DRAINAGE
To be proprietary 110mm diameter P.V.C. pipes flexible jointed to fall 1:70 bedded in 100mm pea gravel. Pipes to discharge into 1200mm diameter soakaways sited 5000mm away from buildings.

PROTECTION TO UNDERGROUND PIPES
Where pipes are not under road and have less than 600mm cover concrete paving slabs should be laid as bridging above the pipes on minimum 75 pea gravel. If flexible pipes are under a road and have less than 900mm cover reinforced concrete bridging should be used instead of paving slabs.

INSPECTION CHAMBER CONSTRUCTION
Proprietary polypropylene inspection chambers bedded on 150mm concrete. Form protective 255mm thick concrete collar around head of inspection chamber with 300mm projection from cover. Covers to be Grade C light duty unless inspection chambers are in driveways where Grade B medium duty covers are to be used.


SAFETY GLAZING
Provide safety glass to BS6206 to all windows to a minimum height of 800mm above floor level plus doors to a minimum height of 1500mm above floor level. Side screens to be same as doors if within 300mm of doors.

SMOKE DETECTION
Provide mains operated self-contained smoke alarms to BS5446 Part 1 in accordance with Approved Document B1


RAINWATER GOODS
P.V.C. rainwater goods 110 half round gutters and 68mm diameter downpipes.

SUBSTRUCTURE WALLING
100mm Class A dense concrete blocks. Bitumen felt d.p.c. to external walls 150mm above ground level. Weak mix infill to base of cavities to terminate 225mm below lowest d.p.c. level.

FOUNDATIONS
As indicated on plan provide concrete strip foundations. To cavity walls provide 700mm wide x 225mm thick and to 100mm walls provide 450mm wide x 225mm thick, unless noted otherwise. To non-loadbearing internal walls thicken out ground floor oversite concrete to 450mm wide x 200mm thick. Widen foundations at chimney breast accordingly and make 300mm thick. Foundations to taken down to an approved firm base, subject to local authority specifications. Concrete to be ST3 grade unless noted otherwise.

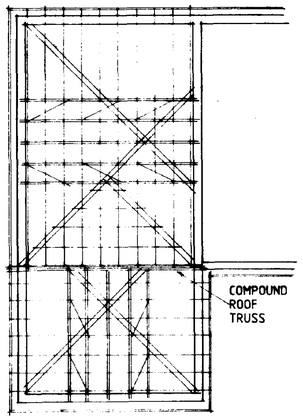


ROOF PLAN

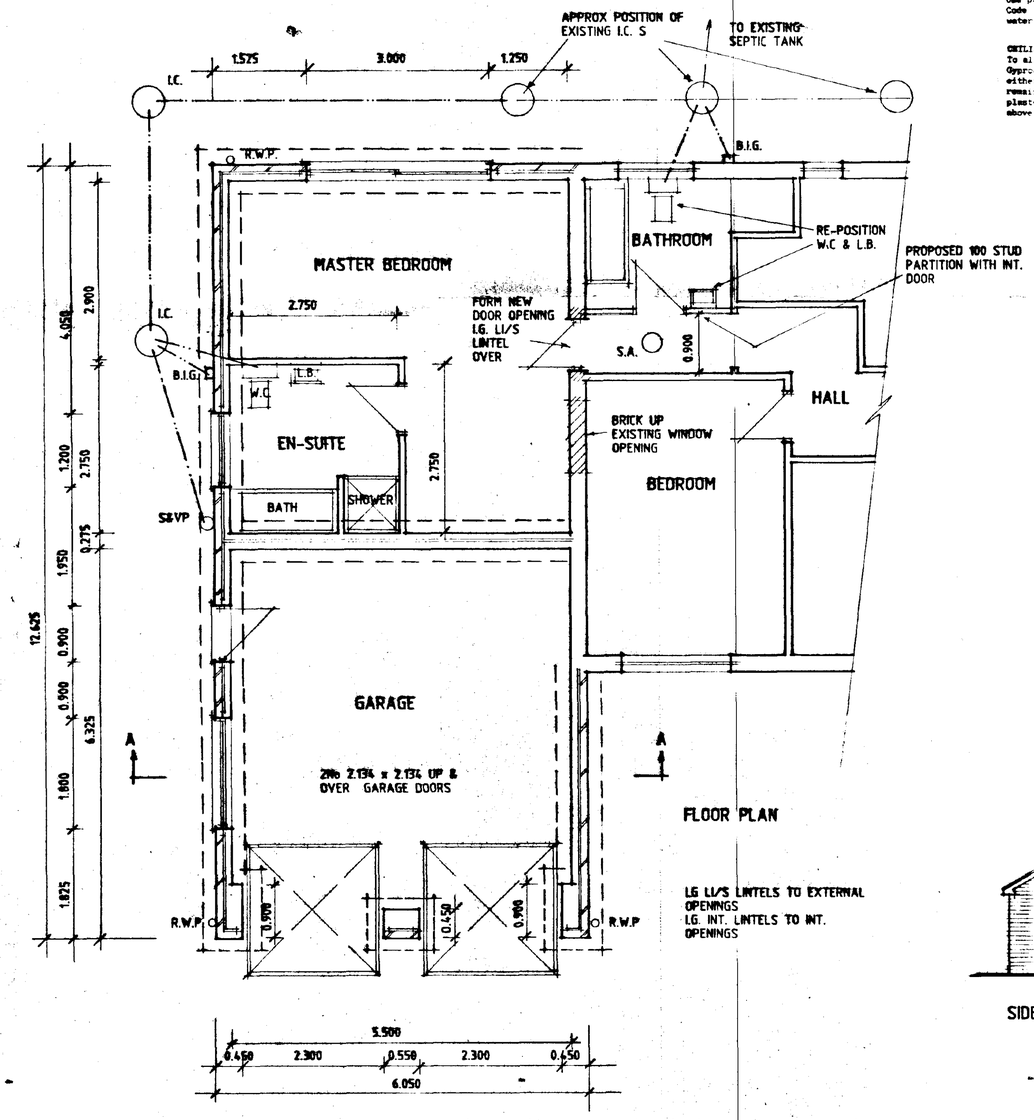

FLOOR PLAN


LG LI/S LINTELS TO EXTERNAL OPENINGS
I.G. INT. LINTELS TO INT. OPENINGS

SECTIONA-A




SIDE

WINDOWS & SIDE DOOR TO BE DOUBLE GLAZED BROWN UPVC

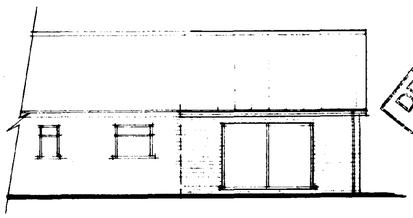


REAR

EXTERNAL ROOF TILES & FACING BRICKS TO MATCH EXISTING

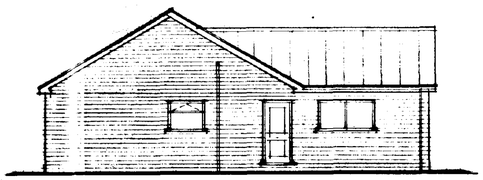

SIDE

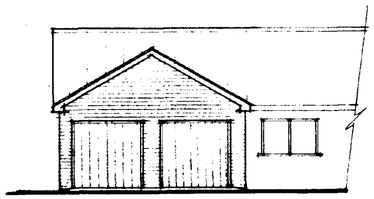

FRONT

DETERMINED PLAN

ND DC
PLANNING
14 MAY 1996
Ref: 0443/96.

DESIGN Status
CONSULTANTS IN ARCHITECTURE & PLANNING

PROPOSED EXTENSION TO BUNGALOW AT TORRINGTON LODGE, TORRINGTON LANE, FLEET CHURCH END FOR

MR. W. E. DAVIES

1:500	1:2500	771900/1
1:50	1:100	
MAY-96		B.GILHAM.

Status House, 4 Princes Street,
Holbeach, Lincs. PE12 7BB
Tel: 01406 424343 Fax: 01406 490702