

**FLOOD RISK ASSESSMENT
FOR PROPOSED
RESIDENTIAL DEVELOPMENT
AT CROWN FARM, 4 STOCKWELL GATE WEST,
WHAPLODE, SPALDING, Lincs.**

FINAL REPORT

GEOFF BEEL CONSULTANCY

JANUARY 2018

GCB/MERCHANT

DISCLAIMER

This document has been prepared solely as a Flood Risk Assessment in support of a planning application for proposed Residential Development at Crown Farm, 4 Stockwell Gate West, Whaplode, Spalding, Lincolnshire. "Geoff Beel Consultancy" accepts no responsibility or liability whatsoever for any use made of this document other than by the client "F Dring & Sons Ltd" for the purposes it was originally commissioned and prepared. All comments and opinions made are based upon information available to "Geoff Beel Consultancy" during the necessary investigative process, and the conclusions and recommendations could therefore, differ in the event of material subsequently being found erroneous, incomplete or misleading. "Geoff Beel Consultancy" therefore, accepts no liability should this prove to be the case.

CONTENTS

- 1.0 INTRODUCTION
- 2.0 LOCATION
- 3.0 THE SITE AND SEQUENTIAL TEST
- 4.0 EXISTING FLOOD ALLEVIATION MEASURES
- 5.0 POTENTIAL SOURCE OF FLOODING
- 6.0 EXTENT OF KNOWN FLOODING
- 7.0 PROBABILITIES AND TRENDS OF FLOODING
- 8.0 IMPACTS OF FLOODING
- 9.0 RESIDUAL RISKS – EXTREME EVENTS
- 10.0 CONCLUSIONS AND RECOMMENDATIONS

- Fig 1 - Location & Site Layout Plans – Existing –
G R Merchant drg. no. 3018-16-02
- Fig 2 - Location & Site Layout Plans – Proposed –
G R Merchant drg. no. 3018-16-20
- Fig 3 - Environment Agency Flood Map for Planning
- Fig 4 - South Holland Updated Strategic Flood Risk Assessment
Map – Residual Flood Depths (2116)
- Fig 5 - Environment Agency Tidal Hazard Mapping –
Depth, Hazard & Velocity of 1 in 200 & 1 in 1000 year
events in 2115; CCN-2016-22462
- Fig 6 - South Holland Internal Drainage Board district plan

1.0 INTRODUCTION

- 1.1 An outline planning application is to be submitted by G R Merchant Ltd on behalf of F Dring & Sons Ltd for proposed residential development at Crown Farm, 4 Stockwell Gate West, Whaplode, Spalding, Lincs.
- 1.2 A Flood Risk Assessment is required to accompany the planning application and meet the requirements and general principles contained in the Planning Practice Guidance to the National Planning Policy Framework (NPPF) and for approval by the Environment Agency.

The site, as situated, is located within Flood Zone 3 of the Environment Agency's Flood Zone Maps. The latest Agency Flood Maps have been created as a tool to raise awareness of flood risk with the public and our partner organisations, such as Local Authorities, Emergency Services and Drainage Authorities. The Maps do not take into account any flood defences.

The site is also shown in Flood Zone 1 of the South Holland District Council's Updated Strategic Flood Risk Assessment Residual Depths Map.(2016)

The site is also located in the South Holland IDB drainage district.

- 1.3 Geoff Beel Consultancy was appointed on 10th November 2017 to undertake a Flood Risk Assessment.

2.0 LOCATION

- 2.1 The development site is located at Crown Farm, 4 Stockwell Gate West, Whaplode. The National Grid Reference of the central point of the development is TF 33102505.
- 2.2 The position and extent of the site is shown on Fig 1 – Location & Site Layout Plans – Existing at the end of the document.
- 2.3 The site, located within the South Holland Internal Drainage Board district is shown within Flood Zone 3 as detailed on the Environment Agency Flood Zone Map but in Flood Zone 1 of the Council's Updated Strategic Flood Risk Assessment Residual Depths Map (2016).

3.0 THE SITE AND SEQUENTIAL TEST

- 3.1 The site is currently open land.
- 3.2 The area of development is approximately 0.09 hectare.
- 3.3 The proposed site layout consists the construction of a new two-storey dwelling. Existing land levels are generally at 3.00m aOD.
- 3.4 The Sequential Test and Exception Test will require to be applied by the Local Planning Authority but the development may be permitted as the site is protected against both the 1 in 200 year return period tidal event and the 1 in 100 year return period fluvial event.

The Sequential Test is met as the site is located in Flood Zone 1 of the Council's Updated Strategic Flood Risk Assessment Residual Depth Map.

4.0 EXISTING FLOOD ALLEVIATION MEASURES

- 4.1 The site is within a defended floodplain, as defined in Appendix 1 of the Environment Agency's 'Policy for the Protection of Floodplains' and is considered to be passive until such time as a flood greater than that for which the defences were designed occurs. The likelihood of flooding due to overtopping or failure of a flood defence embankment is considered to be small.

The development site within the South Holland Internal Drainage Board is protected by the River Welland tidal defences between Spalding and Fosdyke Bridge with embankment levels of a minimum of 7.00m aOD.

- 4.2 The site and the surrounding land drains by gravity to the nearby Whaplode River main drain immediately west of the site and in a northerly direction to the Holbeach River Outfall Sluice and hence to the tidal River Welland.
- 4.3 The existing standard of drainage for the South Holland Internal Drainage Board is 1 in 50 years return period, compatible with the Department of the Environment, Food and Rural Affairs target level of service for rural drainage and flood defence works. Freeboard of 900mm is provided to the lowest land levels.
- 4.4 Current maintenance standards within the South Holland Internal Drainage Board and of the Environment Agency defences are generally very good.

During the operation and maintenance of its pumping stations, associated structures and channel systems, particularly those that could affect property, the Board seeks to maintain a general standard capable of providing flood protection to its district. A routine maintenance programme is in place to ensure that the Boards assets are commensurate with the standard of protection that is sought. However, bank slips, blocked culverts etc may occur from time to time and these matters are usually dealt with promptly.

5.0 POTENTIAL SOURCES OF FLOODING

5.1 Five potential sources of flooding have been identified as a result of this assessment:

- a) local blockages to soakaways
- b) local blockages to IDB main drain system.
- c) storm return period of 1 in 50 years being exceeded
- d) failure of the Holbeach River Outfall Sluice
- e) overtopping and breaching of defences of the tidal River Welland

5.2 The probability of flooding from source a) is low due to the maintenance standards by the future owner and the design requirements of BRE36.

The probability of flooding from b) is also low due to the South Holland IDB main drain design standard incorporating a minimum 900mm freeboard to the lowest land level which provides adequate storage in events greater than 1 in 50 years.

Previous historic rainfall events of 1968 and 1978, estimated to be greater than 1 in 100 year events, caused no flooding to any residential properties at the time and the Boards policy is to provide a standard of drainage which satisfies NPPF requirements of a 1 in 100 year return period for fluvial protection inclusive of the effects of climate change and developments to the arterial system enables a flexible approach to be adopted and meet the criteria for “sustainable urban drainage”.

5.3 Failure of the Holbeach River Outfall Sluice may occur due to long term mechanical breakdown or power supply being disrupted. However, in these circumstances, if conditions were such to put properties and land at risk of flooding, the Internal Drainage Board would take emergency action to maintain the drainage level of service by utilising temporary pumping equipment. The probability of such an occurrence is also considered to be low.

5.4 The flood embankments to the tidal River Welland provide a 1 in 200 year return period level of protection.

The 1 in 200 year River Welland tidal event at Fosdyke Bridge in 2069 is estimated to be 6.41m aOD as against existing embankment levels of a minimum of 7.00m aOD.

There is a low risk during such an event for wave and wind action to cause overtopping and/or breaching of the first line defences parallel with the River Welland. However, the site is located 6.25kms from the River Welland defences and any overtopping/breaching would be minimal.

The development site has existing land levels generally at 3.00m aOD which are compatible with surrounding land levels between the site and the river defences.

- 5.5 The South Holland Updated Strategic SFRA Residual Depth map shows the site could be affected by floodwaters as a result of a breach to the River Welland tidal defences. The Environment Agency Tidal Hazard Mapping similarly shows the site as affected by between 0.00-0.25m depth of water as a result of a breach.

It is necessary to mitigate against this remote risk of flooding and finished floor levels have been raised 300mm above existing ground level at a minimum of 3.30m aOD with 300mm of flood resilient construction above finished floor level.

- 5.6 Surface water drainage from the development site will be to soakaways to BRE365 design requirements and Building Regulations approval.

6.0 EXTENT OF KNOWN FLOODING

- 6.1 During the preparation of this assessment, no evidence was discovered of the site being flooded or of any adjoining properties.

7.0 PROBABILITIES AND TRENDS OF FLOODING

- 7.1 The probability of this development flooding from localised drainage systems is very low.
- 7.2 The probability of the site flooding with water from any South Holland IDB main drain is less than 1% because of the standards of the existing flood defence systems, storage within existing drainage channels and the location of the site.
- 7.3 The probability of the site flooding with tidal waters from any main river system is less than 1% because of the standards of the existing flood defences and the location of the site.
- 7.4 If under very extreme events, levels of floodwater from the South Holland IDB main drains or arterial systems rose to such an extent that the site was affected, the situation would not be sudden. It is very probable that sufficient time would be available to take precautionary actions to limit the extent and potential impact of flooding.
- 7.5 The water levels in the drainage channels will tend to rise as a result of the impacts of climate change. However the existing systems and defences together with the proposed floor levels 300mm above existing ground level at a minimum of 3.30m aOD with 300mm of flood resilient construction above finished floor level will be appropriate for the design life of the development (i.e. 100 years).
- 7.6 Safe access and egress is readily available onto Stockwell Gate and hence in a generally southerly direction to Whaplode located in Flood Zone 1.

8.0 IMPACTS OF FLOODING

- 8.1 No significant impacts of flooding are anticipated.
- 8.2 Floor levels of the development will be 300mm above existing ground level at a minimum of 3.30m aOD with 300mm of flood resilient construction above finished floor level which together with the proposed soakaway drainage system will offer additional protection against impacts arising from any extreme short duration, localised events.
- 8.3 The general location of the site within the catchment is such that if flooding occurred from any of the South Holland IDB main drain systems, then probably 2 to 3 days warning time would be available.
- 8.4 No displacement of water from the site will affect any adjoining properties as a soakaway drainage system will be utilised.

9.0 RESIDUAL RISK – EXTREME EVENTS

- 9.1 The residual risk from extreme events is very low on this site, because of its location, within the South Holland IDB area and its location 5.00kms from the River Welland tidal defences.
- 9.2 The site is within Flood Zone 1 according to NPPF classification and actually has a very low risk of flooding due to the current standards of drainage and flood defence and land levels. The site is not located within a Functional Flood Plain of any 'main river' or 'main drain'. The Environment Agency Flood Map for Planning has been produced irrespective of existing flood defences and standards of protection.
- 9.3 South Holland District Council in conjunction with the Environment Agency and the local IDB's within the Council area have carried out an Updated Strategic Flood Risk Assessment of the whole District by appointed Consulting Engineers.


The Updated Strategic Flood Risk Assessment has produced similar Flood Risk Maps to those published by the Environment Agency and at the same time has analysed flood return periods of all tidal and fluvial defences to account for the effects of climate change. Breach scenarios of embankments failing and/or being overtopped have also been carried out to establish Flood Risk Zones. As a result of the Updated Strategic Flood Risk Assessment for the site is outside any Rapid Inundation Zone and defended by tidal defences and tidal doors.


10.0 CONCLUSIONS AND RECOMMENDATIONS

10.1 As a result of the assessment, the following conclusions have been reached:-

- The proposed development is located in the Passive Floodplain protected by River Welland tidal defences to a 1 in 200 year return period.
- The site is in Flood Zone 1 with the actual risk of flooding from any Environment Agency river system being very low (less than 0.5%).
- Although the site is located within an Internal Drainage District with a minimum standard of drainage of 1 in 50 years, this accords with Defra guidelines for rural development. Freeboard to design water level of 900mm to lowest land level is available for events greater than 1 in 50 years providing further storage within the drainage channels.
- Finished floor level of the dwelling will be raised 300mm above existing ground level at a minimum of 3.30m aOD with 300mm of flood resilient construction above FFL.
- On site rainwater from the development will be discharged to proposed soakaway drainage to BRE365 design requirements and Building Regulations approval.



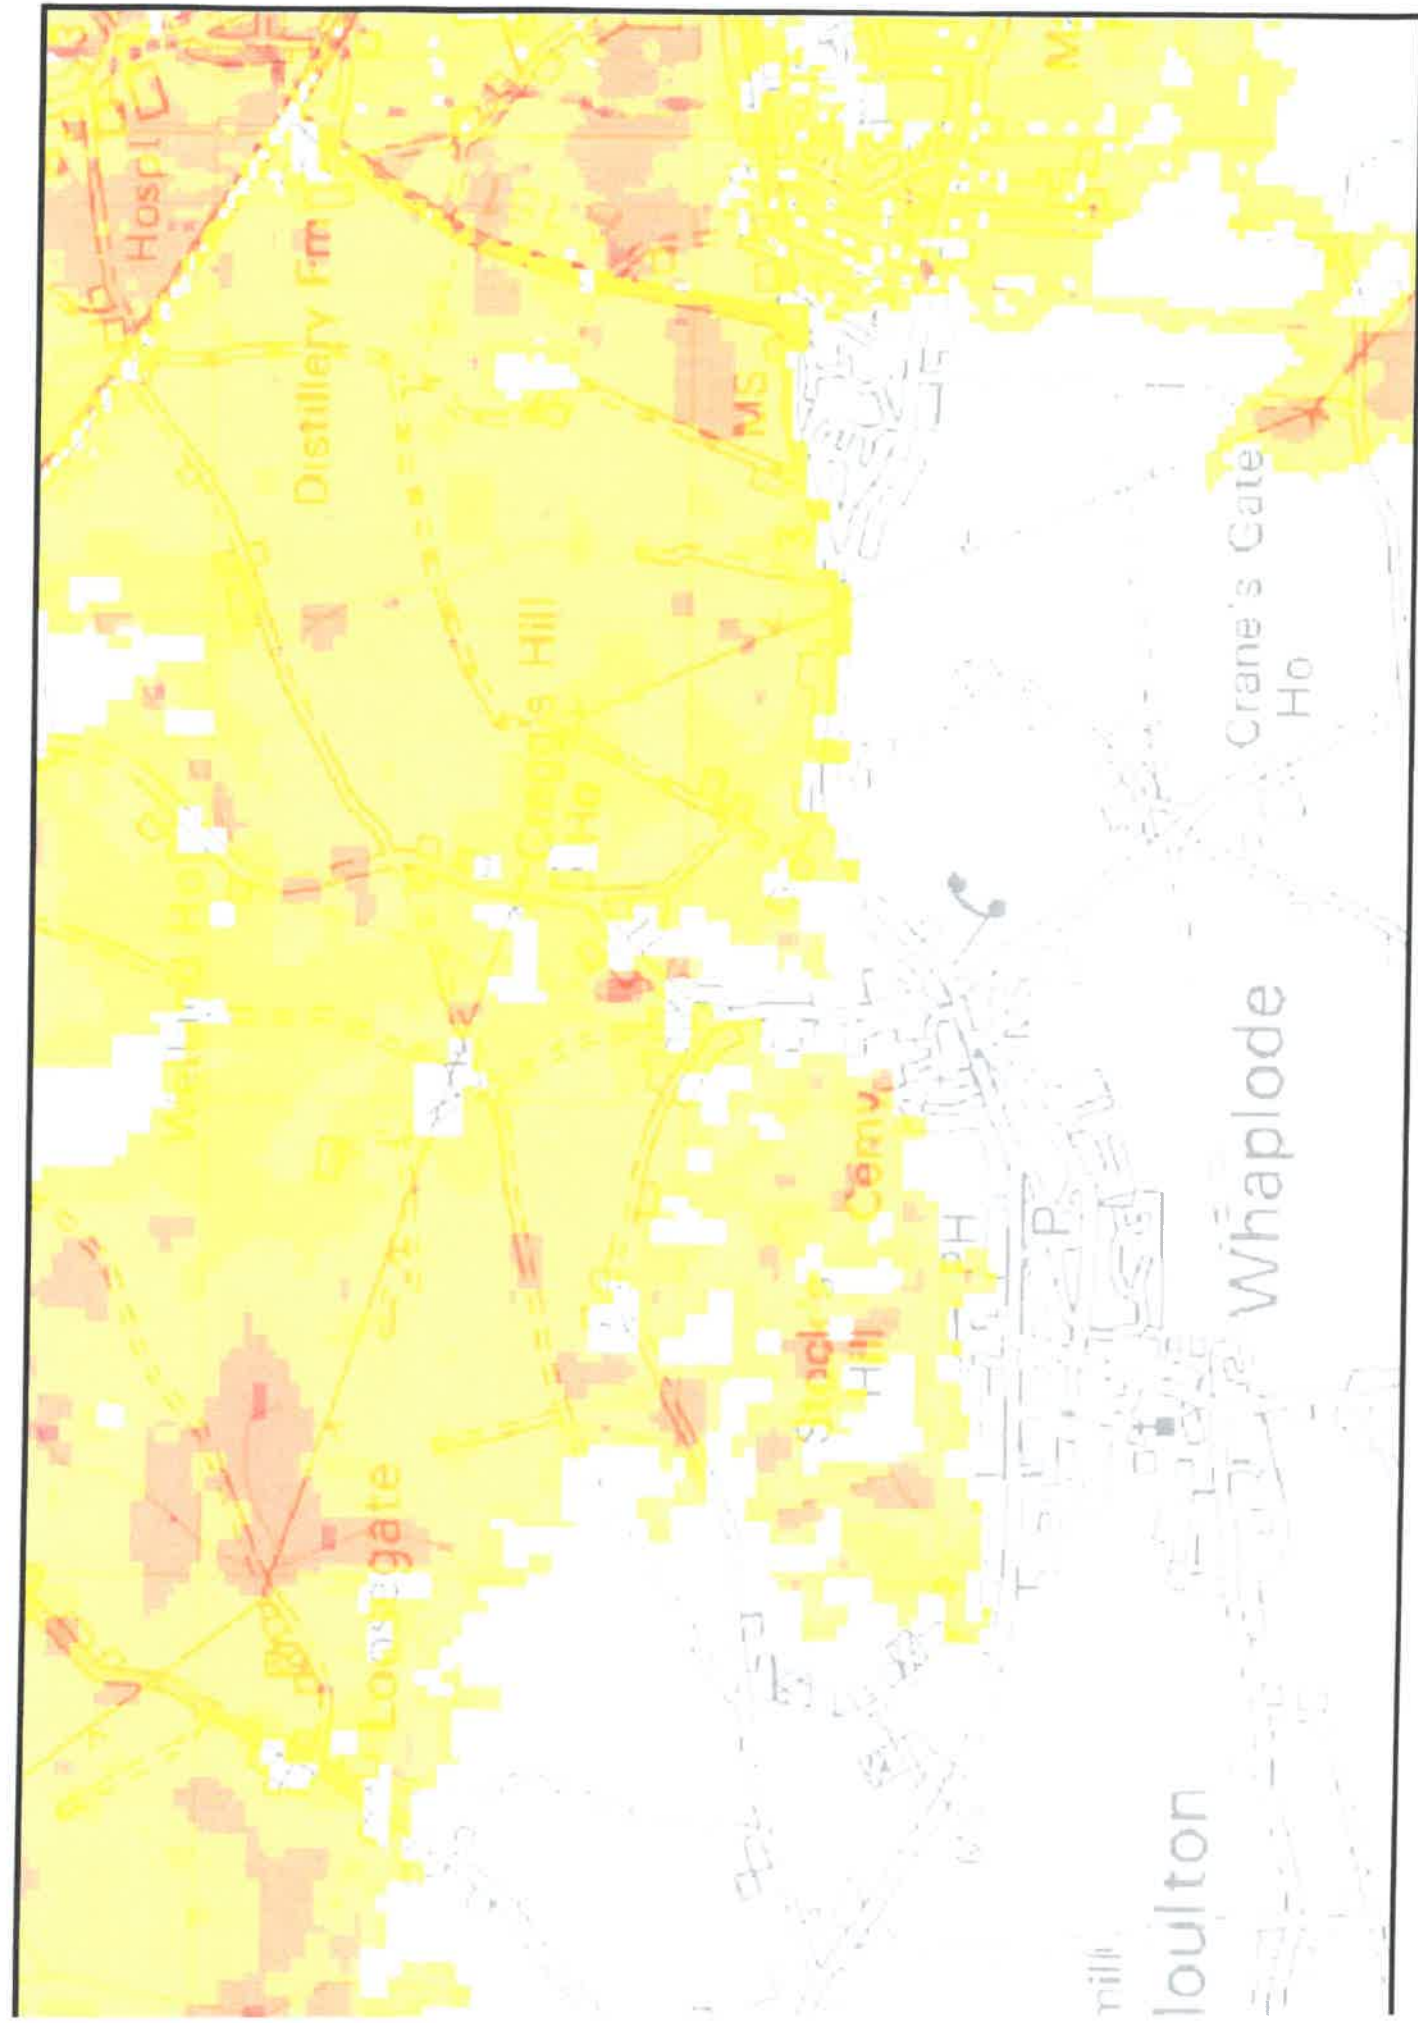

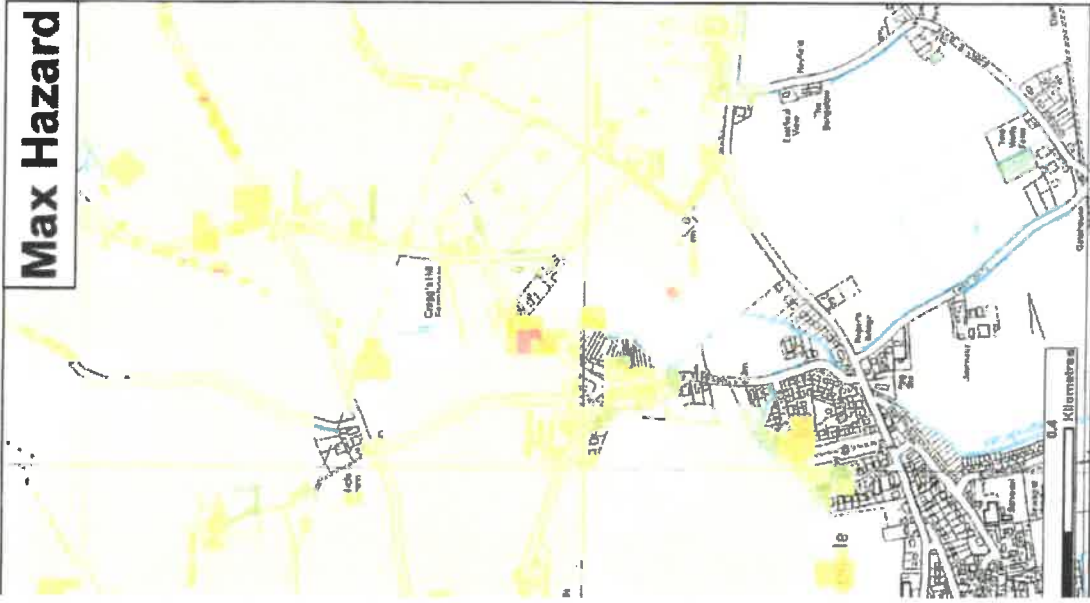

★ Modelled Breach Locations - see also the accompanying plan "Location of Modelled Breaches"

Max Hazard	Max Depth (m)	Max Velocity (m/s)	Scenario year	Scenario Annual Chance	CCN	CCN-2016-22462
Less than 0.75 (Low Hazard)	0 - 0.25	0 - 0.3	October 2016	0.1% (1 in 1000)	CCN	CCN-2016-22462
Between 0.75 and 1.25 (Danger for Some)	0.25 - 0.50	0.3 - 1.0				
Between 1.25 and 2.0 (Danger for Most)	0.50 - 1.0	1.0 - 1.5				
Greater than 2.0 (Danger for All)	1.0 - 1.6	1.5 - 2.5				
	1.6 +	2.5 +				

This map shows the level of flood hazard to people (called a hazard rating) if our flood defences are breached at certain locations, for a range of scenarios. The hazard rating depends on the depth and velocity of floodwater, and maximum values of these are also mapped.

The map is based on computer modelling of simulated breaches at specific locations. Each breach has been modelled individually and the results combined to create this map. Multiple breaches, other combinations of breaches, different sized tidal surges or flood flows may all give different results.

This map only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. The likelihood of a breach occurring will depend on a number of different factors, including the construction and condition of the defences in the area. A breach is less likely where defences are of a good standard, but a risk of breaching remains.

General Enquiries No: 03799 560 506. Weekday Daytime calls cost 5p plus up to 6p per minute from BT Weekend Unlimited. Mobile and other providers' charges may vary.



Uncolnshire and Northamptonshire Tidal Breaching Hazard Mapping

Map Centred on TF 33281 25074

This map is reproduced by permission of Ordnance Survey on behalf of The Crown. Copyright © 2016. All rights reserved. Ordnance Survey Licence No: 100026280. 2016. This map is reproduced by permission of the Environment Agency. All rights reserved. Crown copyright and may be used in presentation or child proceedings.

