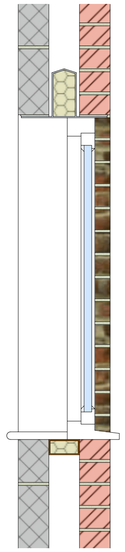

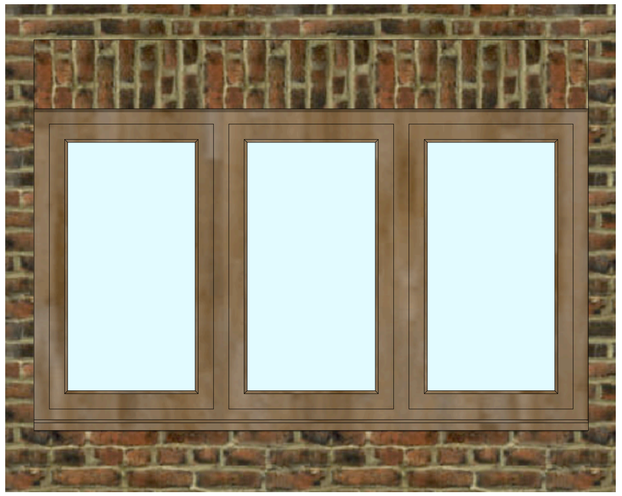

TIMBER WINDOWS AND DOORS STAINED IN SILVER OAK FINISH

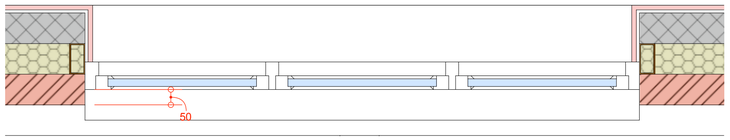

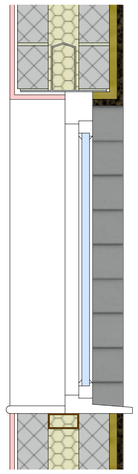

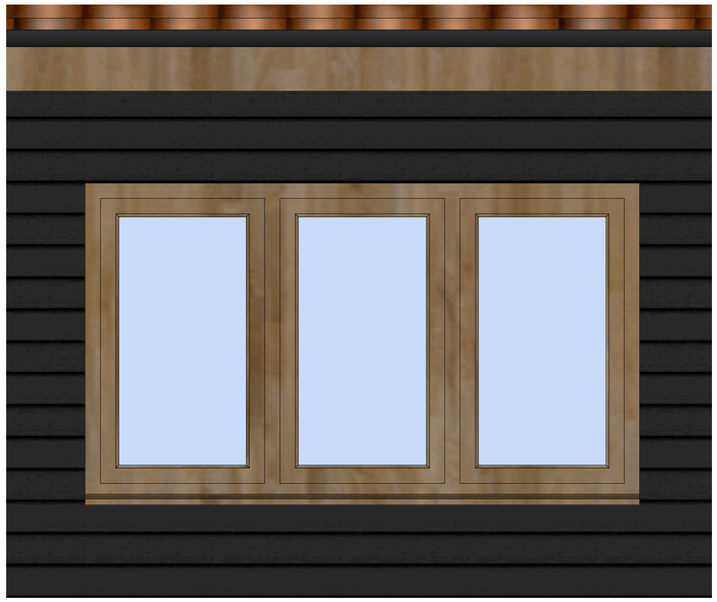

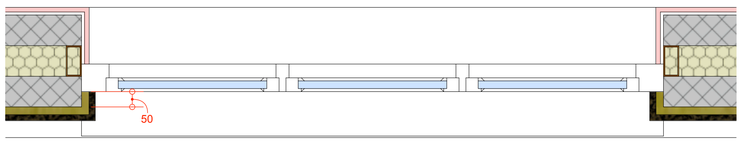

WINDOWS SET WITHIN BRICKWORK
AND CLADDING

PROPOSED RESIDENTIAL DEVELOPMENT 1NO DWELLING TO THE REAR OF 50 BROADGATE WHAPLODE DROVE for MR & MRS HYDE

A	UPVC TO TIMBER	JUN 2018

DO NOT SCALE FROM THIS DRAWING

This drawing is the property of the Author. No reproduction in part or whole is to be made without prior consent. Dimensions should be taken only from this drawing in preference to scaling. Figured dimensions should be based upon appropriate approximations to the extent. No responsibility can be accepted for dimensions taken from this drawing. Any discrepancies between the drawing and site conditions should be reported to the Author before any work is commenced. Any alterations or omissions to the design or specification, or deviations from the design parameters may be considered. Give sufficient notice of any intended commencement of excavation, foundations, drainage, or any other work to allow the Local Authority Building Control Officer to inspect the work. Do not cover up any work until it has been inspected and approved by the Local Authority Building Control Officer. Do not proceed with any work if any discrepancy is found between the drawing and site conditions. Do not proceed with any work if any discrepancy is found between the drawing and the requirements of the Local Authority Building Control Officer. Do not proceed with any work if any discrepancy is found between the drawing and the requirements of any other statutory authority. The works must be the responsibility of a competent contractor. All materials and workmanship must be in accordance with British Standard Codes of practice and the relevant British Standard specifications. Where materials or products are specified or described by reference to a British Standard specification, they should be used in accordance with the relevant British Standard Code of practice. Where materials or products are specified or described by reference to a British Standard specification, they should be used in accordance with the manufacturer's instructions