Edgemere Interlocking Slate



TileFix | Find a stockist

CAD Details | BIM Space

Large format with a thin leading edge for a slate-like appearance

Advantages

Full product details

- 40% thinner than standard interlocking tiles
- Excellent covering capacity
- Can achieve an A+ rating in the BRE Green Guide to Specification*
- Accredited to the BES 6001 standard for responsible sourcing

Downloads

Edgemere Interlocking Tiles
Size: 4.84 Mb

Colours Technical Environmental Case Studie

Fitting and Accessories

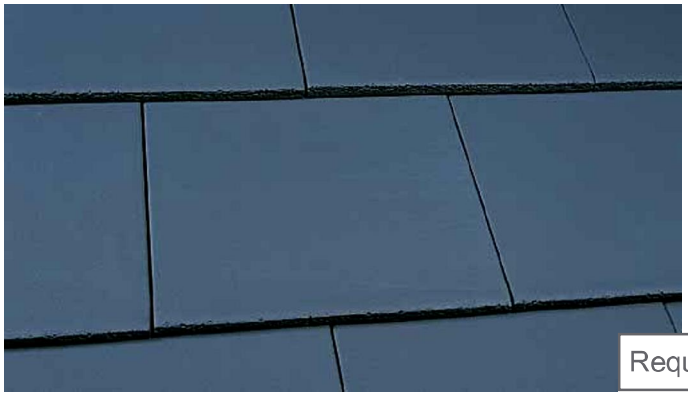

Select a colour to see more detail

Colour
Smooth Grey

Request Sample

Edgemere offers you the perfect combination: an attractive appearance at a surprisingly attractive price. The clean and precise 'slate-like' appearance is enhanced by the thin leading edge and a broken-bond laying technique. At only 18mm thick, Edgemere is sleek and greatly increases kerb appeal, providing you with an affordable evolution from standard interlocking tiles.

With only 9.7 tiles per square metre, Edgemere is a single lap solution, that is quicker and easier to install than natural slate and is also compatible with our full range of ventilation and dry fix systems. With the ability to perform at pitches as low as 17.5°, Edgemere has the versatility to be used on a wide range of roof types.

All of our concrete interlocking tiles can achieve an 'A+' rating (the lowest environmental impact) in the Building Research Establishment's Green Guide to Specification (* element ref: 812410007, 812410018, 812410049).

Accreditation to the BES 6001 framework standard for 'Responsible Sourcing' means that projects using our concrete interlocking slates can now achieve extra credits under BREEAM and The Code for Sustainable Homes. Click here to find out more.

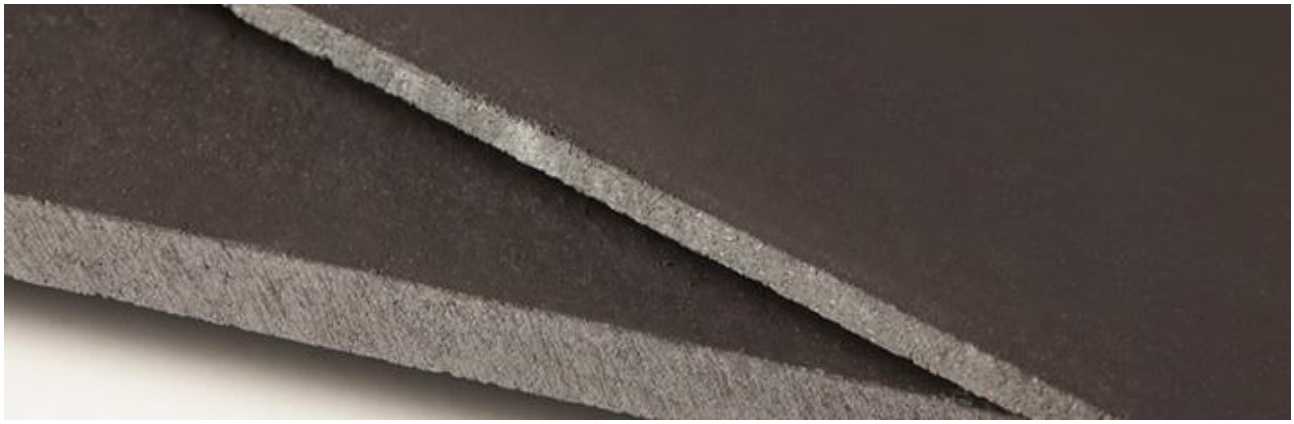

Edgemere is 40% thinner than standard flat interlocking tiles, dramatically improving kerb appeal with a more slate-like appearance.

Please note The British Standard for Slating and Tiling (BS 5534) has recently been updated, making significant changes to tile fixing requirements. To ensure that your roof is compliant to the new standard, our fixing specification service is available and can be accessed by clicking here

* element ref: 812410007, 812410018, 812410049

BIM Downloads

Please login to download
Size: 8.00 Mb

Like 0 Tweet 1 Share 0

Resources
Brochures
Samples
Case Studies
CPDs
Stockist Locator
BIM Space
Blog

About
Locations
Quality
Health & Safety
Useful Links
Corporate Social Responsibility
Working at Marley Eternit
Construction Products Regulation

Popular Products
Fibre Cement Slates
Equitone [tectiva]
Clay Tiles
Cedral weatherboard
Profiled Sheeting
Edgemere
Equitone [natura]

Contact ME
Email ME
Stockist Locator
Location Maps

Like 0 Tweet 1 Share 0

Terms & Conditions of Website Terms & Conditions of Sale Conditions of Order Accessibility Statement Cookie Settings Site Map