

Roofing Facades

[Home](#) [Roofing](#) [Concrete Tiles](#) **Edgemere Interlocking Slate**

Edgemere Interlocking Slate

[TileFix](#)[Find a stockist](#)[CAD Details](#)[BIM Space](#)

Large format with a thin leading edge for a slate-like appearance

Advantages

[Full product details](#)

- 40% thinner than standard interlocking tiles
- Excellent covering capacity
- Can achieve an A+ rating in the BRE Green Guide to Specification*
- Accredited to the BES 6001 standard for responsible sourcing

Downloads

[Edgemere Interlocking Tiles](#)

Size: 4.84 Mb

[Colours](#) [Technical](#) [Environmental](#) [Case Studies](#)

[Fitting and Accessories](#)



Select a colour to see more detail

**Colour**

Smooth Grey


[Request Sample](#)

Edgemere offers you the perfect combination: an attractive appearance at a surprisingly attractive price. The clean and precise 'slate-like' appearance is enhanced by the thin leading edge and a broken-bond laying technique. At only 18mm thick, Edgemere is sleek and greatly increases kerb appeal, providing you with an affordable evolution from standard interlocking tiles.

With only 9.7 tiles per square metre, Edgemere is a single lap solution, that is quicker and easier to install than natural slate and is also compatible with our full range of ventilation and dry fix systems. With the ability to perform at pitches as low as 17.5°, Edgemere has the versatility to be used on a wide range of roof types.

All of our concrete interlocking tiles can achieve an 'A+' rating (the lowest environmental impact) in the Building Research Establishment's Green Guide to Specification (* element ref: 812410007, 812410018, 812410049).

Accreditation to the BES 6001 framework standard for 'Responsible Sourcing' means that projects using our concrete interlocking slates can now achieve extra credits under BREEAM and The Code for Sustainable Homes. [Click here to find out more.](#)

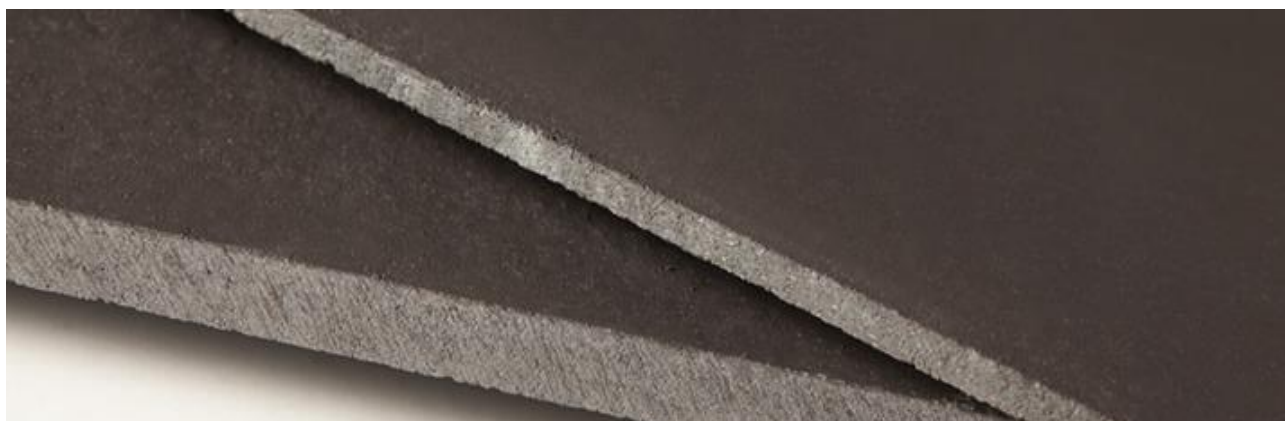

Edgemere is 40% thinner than standard flat interlocking tiles, dramatically improving kerb appeal with a more slate-like appearance.

Please note The British Standard for Slating and Tiling (BS 5534) has recently been updated, making significant changes to tile fixing requirements. To ensure that your roof is compliant to the new standard, our fixing specification service is available and can be accessed by clicking [here](#)

* element ref: 812410007, 812410018, 812410049

BIM Downloads

[Please login to download](#)

Size: 8.00 Mb



Like

0

Tweet

1

Share

0

10/6/2015

Edgemere Interlocking Slate with Thin Leading Edge

Resources

Brochures

Samples

Case Studies

CPDs

Stockist Locator

BIM Space

Blog

About

Locations

Quality

Health & Safety

Useful Links

Corporate Social Responsibility

Working at Marley Eternit

Construction Products Regulation

Popular Products

Fibre Cement Slates

Equitone [tectiva]

Clay Tiles

Cedral weatherboard

Profiled Sheeting

Edgemere

Equitone [natura]

Contact ME

Email ME

Stockist Locator

Location Maps

Like

0

Tweet

1

Share

0