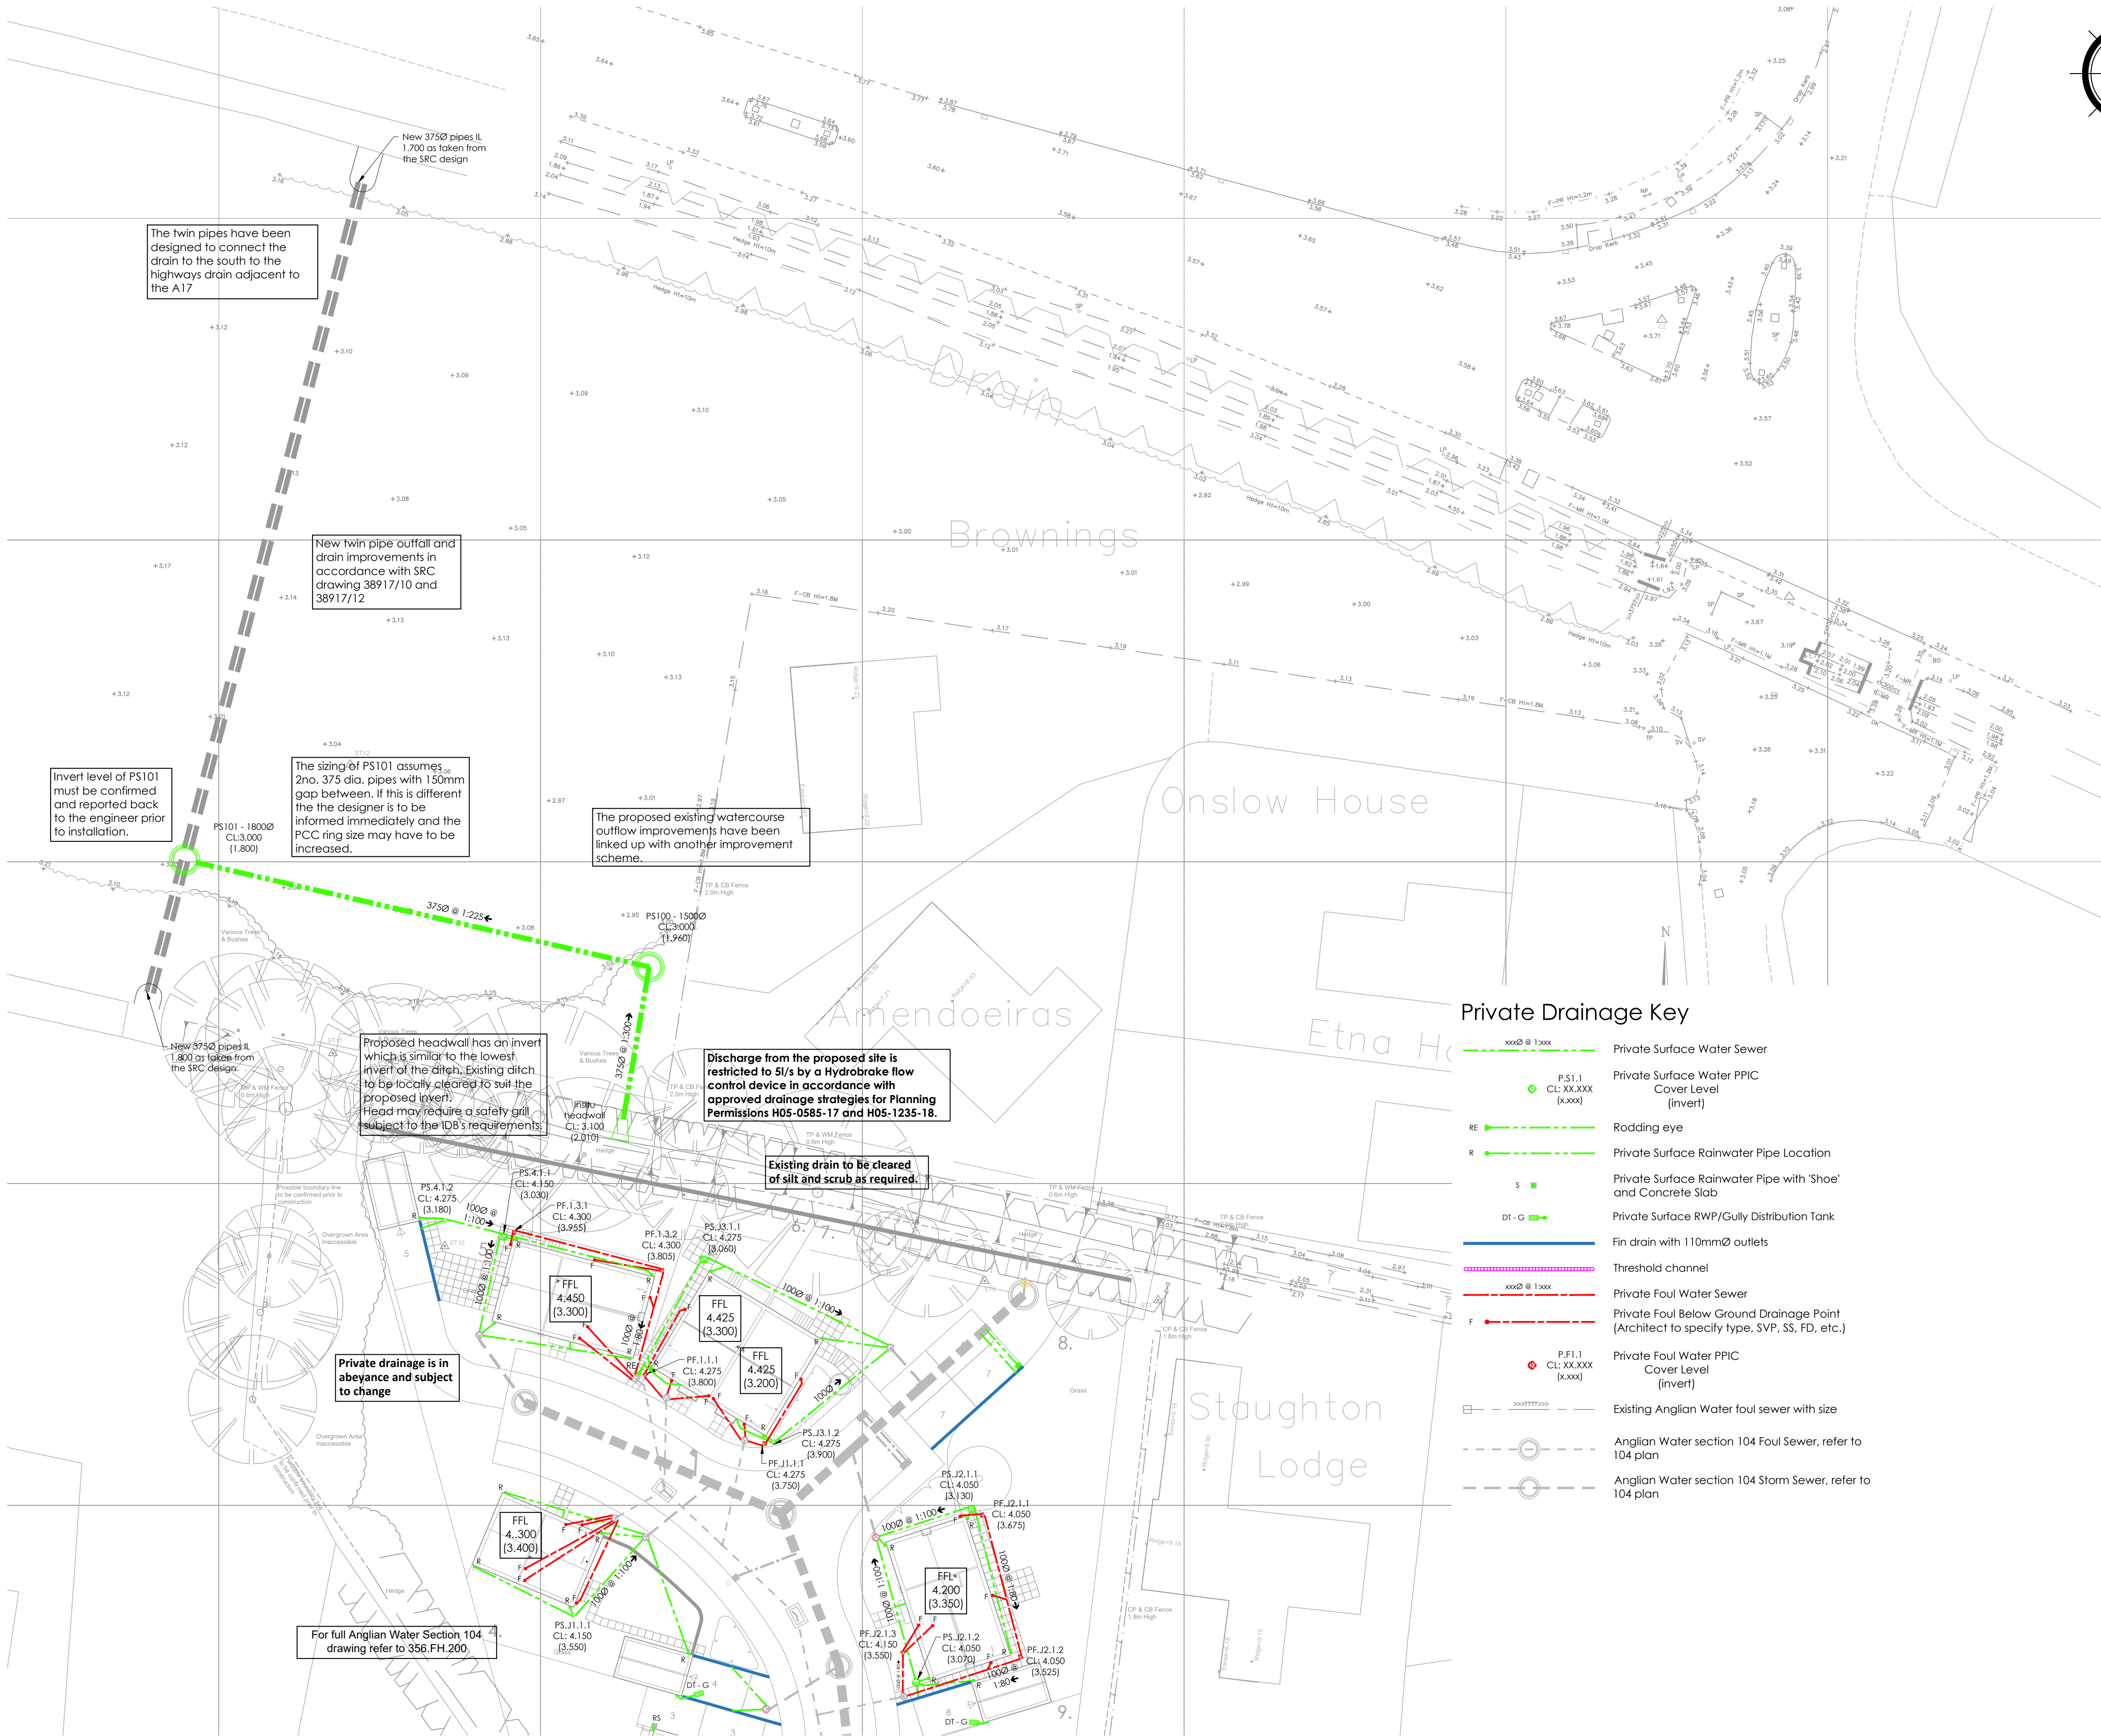


Do not scale directly from this drawing. All discrepancies are to be brought to the attention of the below office.

The copyright to this drawing is owned by studio 11 architecture.

The General Contractor is to check all dimensions on site and report discrepancies to the designer.

The details and information shown hereon relating to existing underground drains, main services, cables, etc., and existing structural details, are as obtained by normal survey observation method. Although all reasonable effort has been made, no guarantee can be made or given for the completeness or accuracy of this information.

- Notes:
- All drawings to be read in conjunction with Structural Engineers Drawings.
 - All plans are drawn in meters unless noted otherwise.
 - Drainage design in accordance with Sewers for Adoption 6th edition.
 - Road design in accordance with 'Lincolnshire County Council - Development Road and Sustainable Drainage Specification and Construction', and any specific requirements of the approving highway officer.
 - Estate road materials to be in accordance with Lincolnshire County Council specifications.
 - All manholes located in the adoptable highways to have a minimum cover grades of D400, be 150mm thick and to me marked FW and SW to denote foul water and surface water, respectively.
 - It is proposed that all laterals from plots are to be adopted.
 - Find connection point levels and locations need to be confirmed prior to commencement of construction.
 - All proprietary items to be installed in strict accordance with the manufacturers instructions and recommendations.
 - All works to be carried out in accordance with the current British Standards, Codes for practice and Building Regulations.
 - Manholes and coordinates are given to the centre of manholes. Groundworker to ensure offsets allow minimum benching requirements and offsets from kerbs.
 - Generally the first inspection chamber located in the private areas is a demarcation chamber for the AW adoptable lateral. Cover grades to be:
 - D400 - adoptable areas and the main access way.
 - C250 - shared parking areas
 - B125 - private domestic car parking (single dwelling)
 - A15 - soft landscaped and non-vehicle areas.
 - All drawings need to be read in conjunction with each other, any discrepancies must be reported back to the engineer immediately.
 - Any sewer pipes with less than 1.2m of cover to the top of pipe in the adopted carriageway, less than 1.2m under adopted vehicular crossovers are to receive a concrete cover slab. Where there is very little cover, the pipe is to be ductile iron - refer to longsections for material type.
 - Outside of manhole construction and outside of pipelines to be at least 0.5m and 1.0m respectively, from the kerbface. Sewers might need to be offset in the manholes to achieve - to be confirmed on site.
 - All details are to be read in conjunction with Anglian Water's standard adoptable drainage details - available from Anglian Water upon request.
 - Contractor to ensure that all items are sufficiently protected during construction.

Private Drainage Key

- xxxØ @ 1:xxx Private Surface Water Sewer
- P.S1.1 CL: XX.XXX (x.xxx) Private Surface Water PPIC Cover Level (invert)
- RE Rodding eye
- R Private Surface Rainwater Pipe Location
- S Private Surface Rainwater Pipe with 'Shoe' and Concrete Slab
- DT-G Private Surface RWP/Gully Distribution Tank
- Fin drain with 110mmØ outlets
- Threshold channel
- xxxØ @ 1:xxx Private Foul Water Sewer
- F Private Foul Below Ground Drainage Point (Architect to specify type, SVP, SS, FD, etc.)
- P.F1.1 CL: XX.XXX (x.xxx) Private Foul Water PPIC Cover Level (invert)
- Existing Anglian Water foul sewer with size
- Anglian Water section 104 Foul Sewer, refer to 104 plan
- Anglian Water section 104 Storm Sewer, refer to 104 plan

D	07.11.2021	S11	Route of pipe to northern field has been amended.
C	03.09.2020	S11	Pipe size for proposed ditch culvert increased to suit IDB comments.
B	31.03.2020	S11	Client name changed. Proposed pipe/culvert now shown as a private sewer. Drawing generally updated to reflect the private drainage.

STUDIO11 architecture

THE BOATHOUSE, HARBOUR SQUARE,
NENE PARADE, WISBECH,
CAMBRIDGESHIRE, PE13 3BH

T: 01945 467339
E: design@studio11architecture.co.uk
W: www.studio11architecture.co.uk

CLIENT	Belmont Contractors		
PROJECT	Residential Development off Old Main Road, Fleet Hargate		
DRAWING	Proposed Private Culvert/Existing Ditch Diversion		
DRAWN S11	PROJECT DESIGNER LAR	PROJECT DIRECTOR KB	
DATE 18.03.2019	SCALE 1:250	PAPER SIZE A1	
DRAWING NUMBER	356.FH.205		
Working in partnership with Ralph Charman Associates & Eleven Consultants			