

AREA COMPARISON
1/500

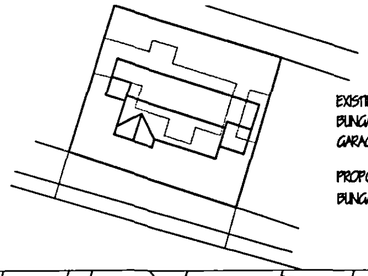

EXISTING :-
BUNGALOW - 95.50 Square metres.
GARAGE - 17 Square metres.

PROPOSED :-
BUNGALOW & GARAGE - 122.70 Square metres.

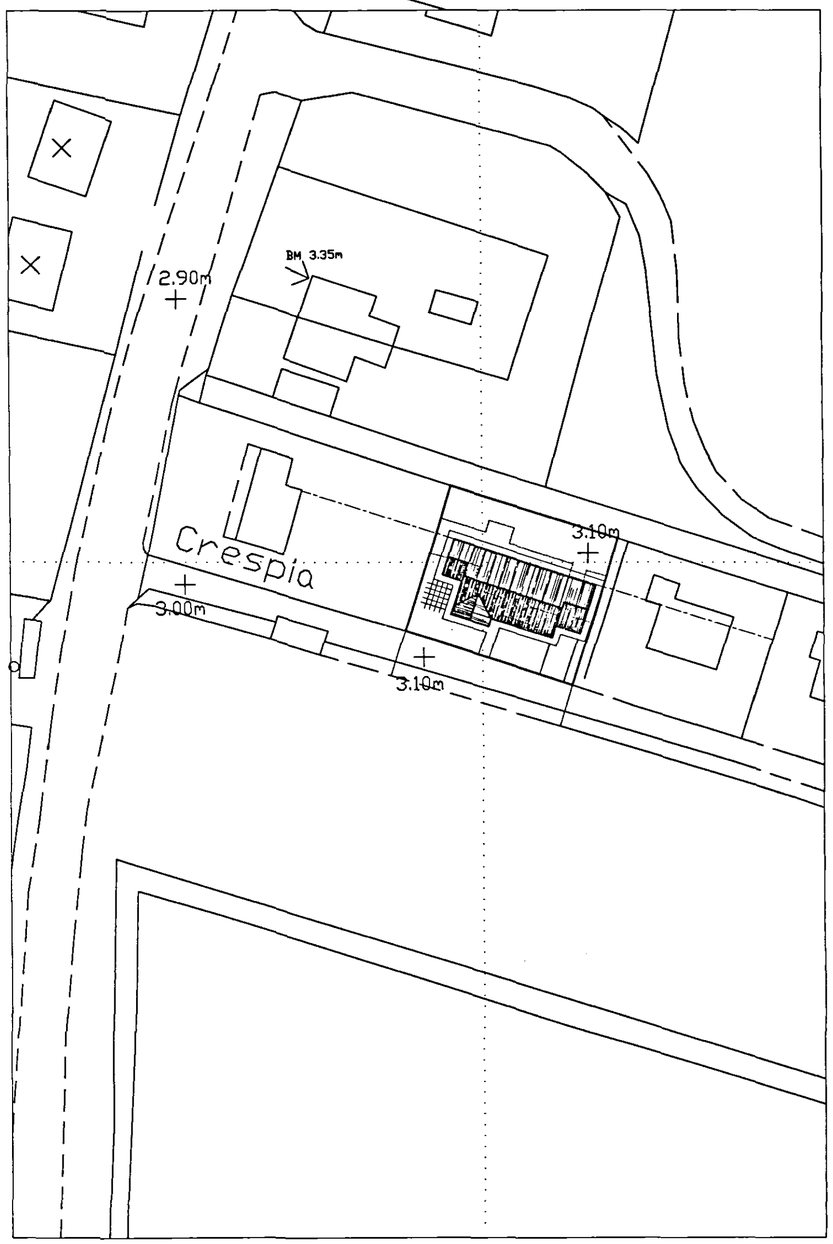

SITE PLAN
1/500

LANDSCAPING, TREE PLANTING & FENCING SCHEME.

A MIXED HEDGE
(a) Hawthorn (Crataegus Monogyna)
(b) Beech (Fagus Sylvatica)
(c) Blackthorn (Prunus Spinosa)
(d) Buckthorn (Rhamnos Cathartica)

B SILVER BIRCH (BETULA PENDULA) FEATHERED


C 1.8 METRE HIGH VERTICAL CLOSE BOARDED FENCE REDUCING TO 1.0 METRE @ ROADWAY.

All planting to be in accordance with BS 4428:1989 and amendment No. 1 (1991)

All trees to be planted with minimum 0.6m plastic mulch mat and to be staked, tied and tubed.

1/3 to ½ bag of peat free tree and shrub planting compost to be incorporated into backfill for each tree hole.

PROPOSED D.P.C 200mm ABOVE GENERAL GROUND LEVEL @ 3.30 m above O.D.NEWLYN.

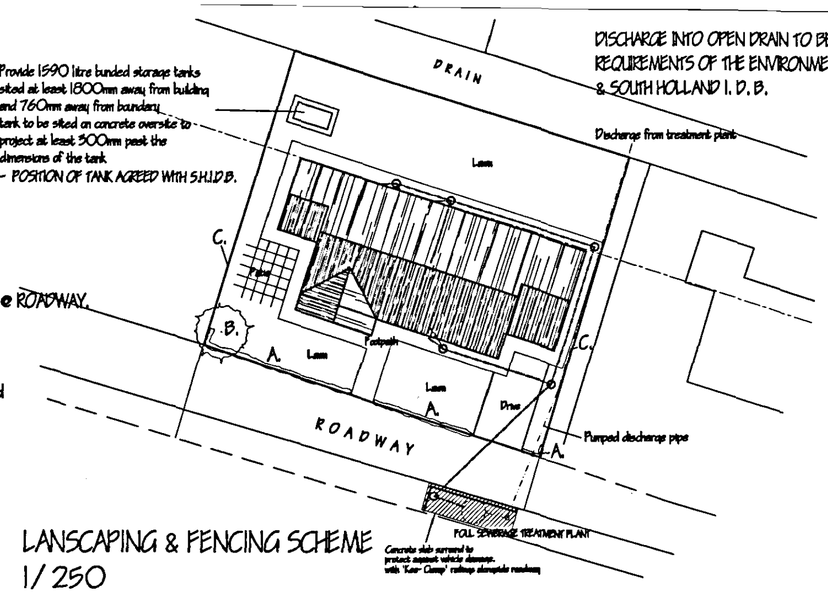


DISCHARGE INTO OPEN DRAIN TO BE TO THE REQUIREMENTS OF THE ENVIRONMENT AGENCY & SOUTH HOLLAND I.D.B.

LANSCAPING & FENCING SCHEME
1/250

TREATMENT PLANT TO BE FITTED WITH A NOTICE PLATE STATING EMERGENCY NUMBERS & MAINTENANCE PERIODS ETC.

NORTH

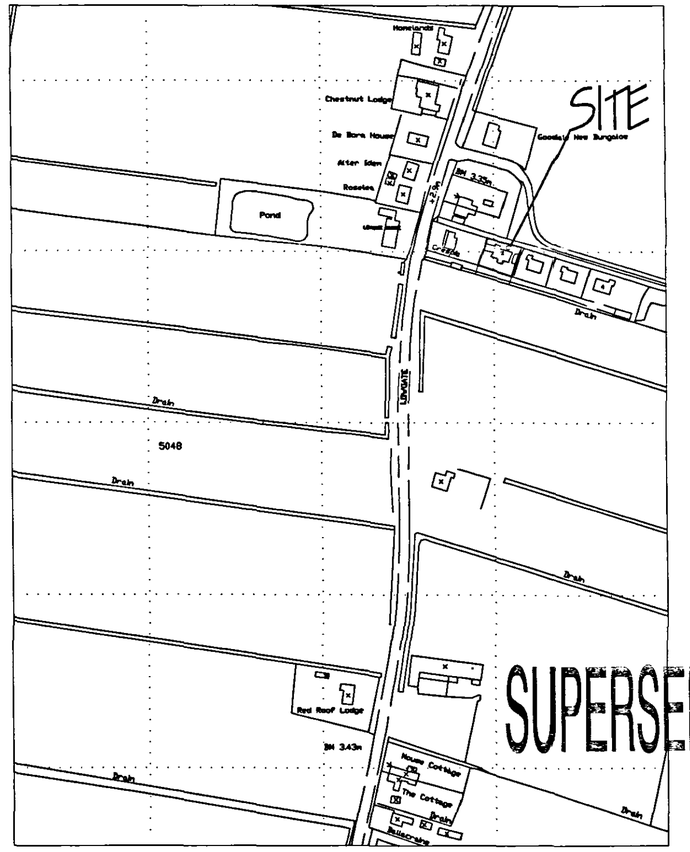

SUPERSEDED

LOCATION PLAN.
1/2500

AMENDED PLAN
Ref. A1

SHDC
Planning & Development
22 SEP 2006
Ref: 0899/06

F.	ADDITIONAL SITE LEVELS.	SEPT '06.
E.	AMEND OIL STORAGE TANK POSITION	JLY '06.
D.	EXTRA BUILDING REGULATIONS AMENDMENTS.	JLY '06.
C.	BUILDING REGULATIONS AMENDMENTS.	JLY '06.
B.	BUILDING REGULATIONS APPLICATION.	JNE '06.
A.	LANDSCAPING & LEVELS - CONDITION COMPLIANCE.	JNE '06.
ref:	revision	date

G. R. MERCHANT
I.ENG AMICE FIWO

ARCHITECTURAL, STRUCTURAL AND LAND DRAINAGE CONSULTANTS

Unit 4, Wrights Mews
12A Park Road, Holbeach,
Spalding, Lincs. PE12 7EE
Tel: 01406 480800
Fax: 01406 425744
E-Mail: G. R. Merchant @ Merchant. FS. Co. UK

Project
PROPOSED BUNGALOW & GARAGE.
OFF LOWGATE.
FLEET HARGATE.
SPALDING. LINC'S.

Client
MRS. S. WEE.

Drawing
SITE & LOCATION PLANS.

Job Ref.	Drawing No.
1322-06.	05F.
Date: MARCH '06.	Drawn: GRM.

Scales
AS INDICATED.

DO NOT SCALE FROM THIS DRAWING

This drawing is copyright and may not be altered, traced, photographed or used for any other purposes other than that for which it is issued. The General Contractor is to check all dimensions on site and report any discrepancies to the Architect. All details shown on this drawing including foundations are based upon typical site conditions existing in the area. No responsibility can be accepted for unusual conditions, which may be discovered during excavations unless reported to the Architect on that design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken. This drawing is limited to the extent of information considered and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning / Building Regulation approval. This drawing must not be used as a contract document alone. The works will not be commenced or inspected on site by G R Merchant or any representative thereof. It is the client or their appointed agents responsibility to control contractors, subcontractors of materials, information to specialists, workmen to construct site.

All materials to be new unless otherwise stated and all components and materials are to be used fixed and installed etc. in strict accordance with manufacturers instructions and relevant codes of practice. Materials shall conform to appropriate British standard specification or BBA certificate or European code equivalent. The Employer / Client shall ensure that the contractor undertakes to commence with and schedule all measures necessary to achieve compliance with Health and Safety legislation for Building sites and Work places. The Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations as Industrialist Projects, Supervision will be required. The works shall comprise of all that is shown on the drawing and details. Work that may not specifically shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.