
CONSTRUCT ALL NEW SOAKAWAYS A MIN 5m AWAY FROM FACE OF BUILDING TO COMPRISE OF 200 mm TOPSOIL RESTING ON 300 mm COARSE GRAVEL WELL COMPACTED SOAKAWAY MUST BE 1000 mm BELOW INVERT OF INCOMING DRAINS IN ACCORDANCE WITH BRE DIGEST 151.

CONSTRUCT ALL NEW MANHOLES IN 229 mm BLASS B ENGINEERING BRICKWORK IN SAND / CEMENT MORTAR 1:3 ON 150 mm CONCRETE BASE Fix MEDIUM DUTY COVER FLUSH WITH EXTERNAL PAVING LEVELS.

ALL NEW DRAINS TO BE 100 mm Ø FLEXIBLE JOINT S.G. PIPEWORK LAID TO MIN 1:40 FALLS & ENCASED IN 150 mm WEAK MD CONC.

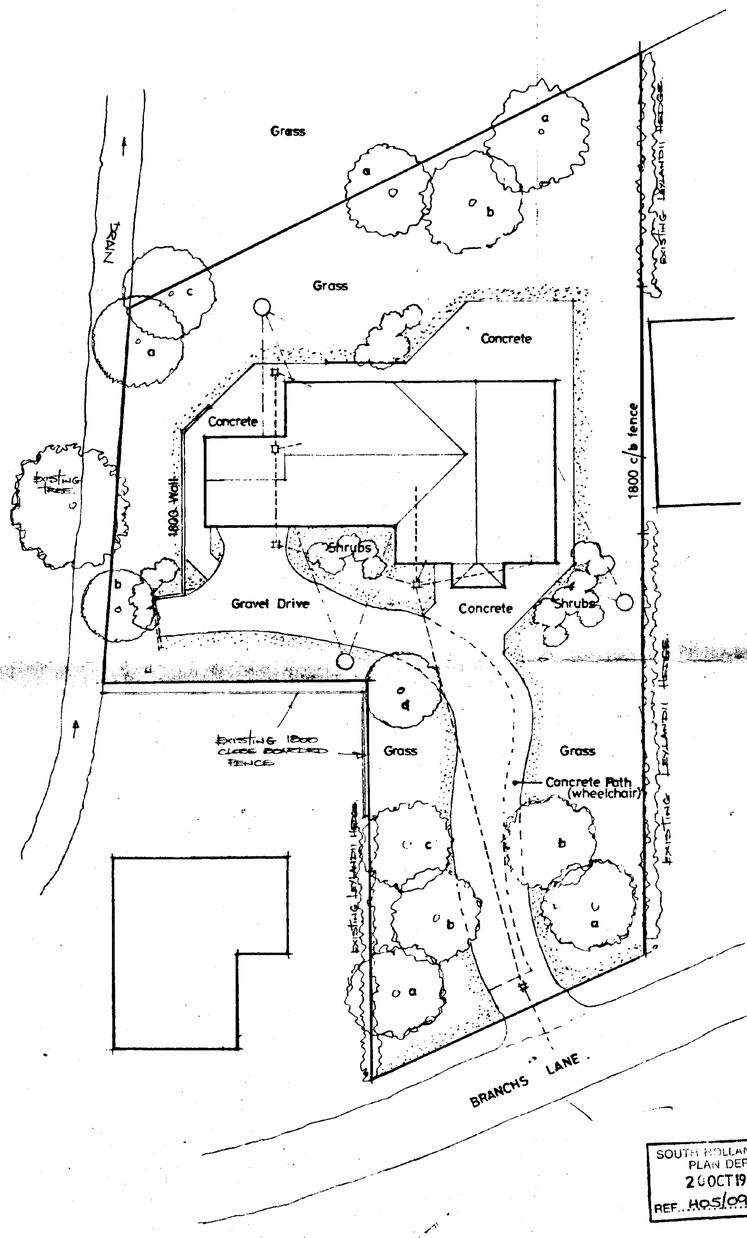

SOUTH HOLLAND D.C.
PLAN DEPT
20 OCT 1994
REF. H05/0918/94

LANDSCAPING SCHEME.

a – RED HAWTHORN (CRATAEGUS PAULS SCARLET) – ½ STANDARD.
b – WHITEBEAM (SORBUS ARIA LUTESCENS) – ½ STANDARD.
c – GREEN BEECH (FAGUS SYLVATICA) – ½ STANDARD.
d – CRIMSON KING MAPLE (ACER PLATANOIDES) – ½ STANDARD.

AMENDED PLAN
Ref.
1. 15.12.94. Retaining [illegible] of fence

G. R. MERCHANT
I.ENG AMICE, FIWO,
ARCHITECTURAL, STRUCTURAL & LAND DRAINAGE CONSULTANT
TEL: HOLBEACH (0406) [illegible], 490800.

PROJECT:
BUNGALOW.
BRANCHS LANE.
HOLBEACH.

CLIENT:
I. DACK.

DETERMINED PLAN

SCALES:	DATE:
1/200.	SEPT 1994.
G.R. MERCHANT.	DRAWING No.: ID.1A

REVISIONS:
A

SUMMIT 1000-2937