



FOOTWAY SPECIFICATION
 25 of 6 nom. dense bit. mac. wearing course
 50 of 20 nom. dense bit. mac. basecourse
 100 of Type 1 aggregate sub-base

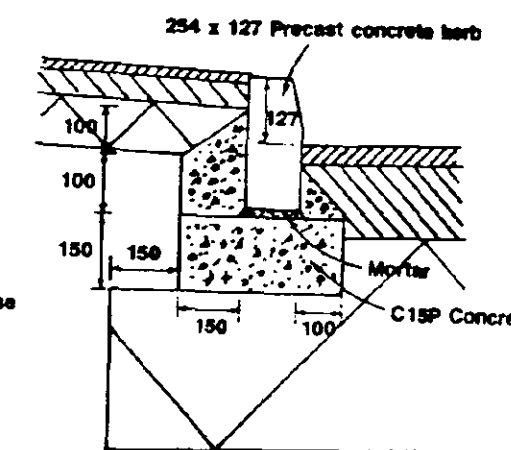

CARRIAGEWAY SPECIFICATION
 40 of Hot Rolled Asphalt wearing course with pre-coated chippings
 150 of 20 nom. dense bit. mac. basecourse
 450 of Type 1 aggregate sub-base
 Geotextile

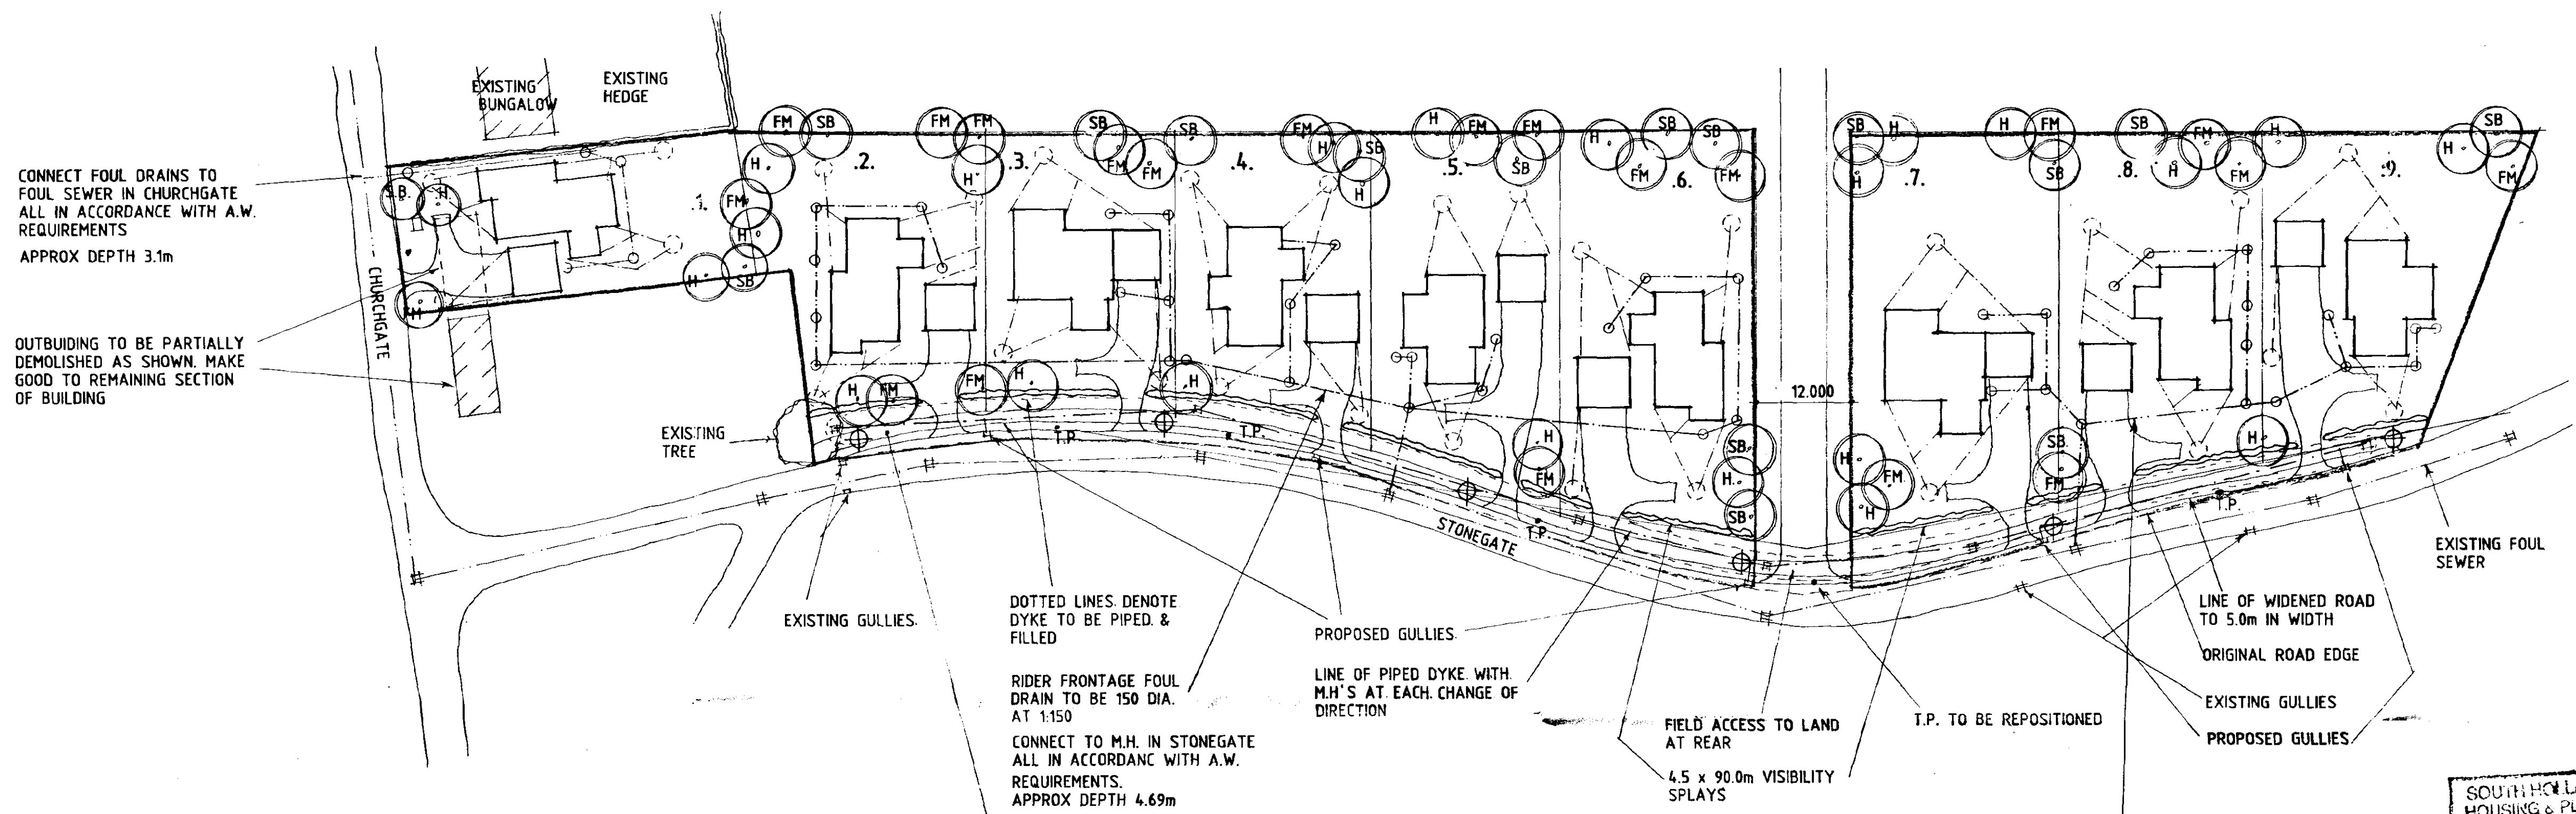

CONNECT FOUL DRAINS TO FOUL SEWER IN CHURCHGATE ALL IN ACCORDANCE WITH A.W. REQUIREMENTS
 APPROX DEPTH 3.1m

OUTBUILDING TO BE PARTIALLY DEMOLISHED AS SHOWN. MAKE GOOD TO REMAINING SECTION OF BUILDING

DOTTED LINES DENOTE DYKE TO BE PIPED & FILLED
 RIDER FRONTAGE FOUL DRAIN TO BE 150 DIA. AT 1:150
 CONNECT TO M.H. IN STONEGATE ALL IN ACCORDANCE WITH A.W. REQUIREMENTS.
 APPROX DEPTH 4.69m

LINE OF PIPED DYKE WITH M.H.'S AT EACH CHANGE OF DIRECTION

FIELD ACCESS TO LAND AT REAR
 4.5 x 90.0m VISIBILITY SPLAYS

RIDER FRONTAGE FOUL DRAIN TO BE 150 DIA. AT 1:150
 CONNECT TO M.H. IN STONEGATE ALL IN ACCORDANCE WITH A.W. REQUIREMENTS.
 APPROX DEPTH 4.470m

SOUTH HOLLAND DC HOUSING & PLANNING
 14 MAY 1999
 125/18

Drives
 Washed gravel on 100mm consolidated hardcore. Concrete edging kerbs.

Turning
 Provide turning bays from garages as shown all to local authority requirements.

Accesses
 Accesses to be minimum 2.5m wide and constructed all in accordance with Lincolnshire County Council requirements.

Dyke
 Dyke to site frontage to be piped with solid concrete pipes 450mm diameter and to be connected to existing 600mm diameter pipe outlet. Levels and falls to suit existing outlet. New road gullies as shown to be connected into new pipeline. All works to be in accordance with Lincolnshire County Council and South Holland Internal Drainage Board requirements.

Road Improvements
 Road frontage to site along Stonegate to be widened to a minimum width of 5m. All works to conform to Lincolnshire County Council Development Road Specification and Construction 1997.

Landscaping
 Plant trees as shown, minimum height on planting to be 2m.

SB Silver birch
FM Field maple
H Hawthorn

To site frontage where shown plant hawthorn hedge.

Foul Drainage
 Connect to existing foul drainage system in Church Gate and Stonegate as shown.

Street Lighting
 6 no. high pressure sodium 5m poles, street lighting columns with post top mounted (Philips ME70TG*1) lantern for 70 watt SON-T lamp and SFLC ECU.
 Existing lighting to be removed.

For street lighting details and specification etc. see Harlite information dated 12.08.98.

- DWELLINGS**
- PLOT 1 - ULLSWATER
 - PLOT 2 - ULLSWATER
 - PLOT 3 - LANGDALE
 - PLOT 4 - DERWENT
 - PLOT 5 - CONISTON
 - PLOT 6 - ULLSWATER - HANDED
 - PLOT 7 - LANGDALE
 - PLOT 8 - ULLSWATER - HANDED
 - PLOT 9 - CONISTON - HANDED
- GARAGES**
- G.T.L./D.G./1 TO PLOTS 6 & 9
 - G.T.L./D.G./2 TO PLOTS 1,2,4,5 & 8

Notes & Revisions

Do not scale from this drawing.

This drawing is copyright and may not be altered, traced, copied, photographed or used for any purpose other than that for which it is issued without written permission from Messrs. Status Design.

The General Contractor is to check all dimensions on site and report discrepancies to the Architect.

All details shown on this drawing are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions unless reported to the Architects so that design amendments may be considered.

Please note: This drawing is not a conveyance drawing.

Construction work to be carried out with due regard to the Construction (Design and Management) Regulations 1994 (CDM) and the Health and Safety at Work, etc. Act 1974 (HSW Act).

SITE PLAN

PROVIDE 1.8m WIDE FOOTPATH TO FULL SITE FRONTAGE WITH 2.0m WIDE VERGE BETWEEN ROAD & FOOTPATH CONSTRUCTED ALL IN ACCORDANCE WITH L.C.C. DEVELOPMENT ROAD SPECIFICATION & CONSTRUCTION 1991

External Materials

Marley Mendip, Old English Dark Red roof tiles to Plots 1, 2, 3 & 4.


Marley Mendip, Smooth Grey roof tiles to Plots 5, 6, 7 & 8.

LBC Kempston, Cantata Antique facing bricks to Plots 1 & 3.

LBC Kempston, Seville Antique facing bricks to Plots 3 & 4.

LBC Kempston, Andante Golden Buff facing bricks to Plots 5 & 6.

LBC Kempston, Mozart Blend facing bricks to Plots 7 & 8.

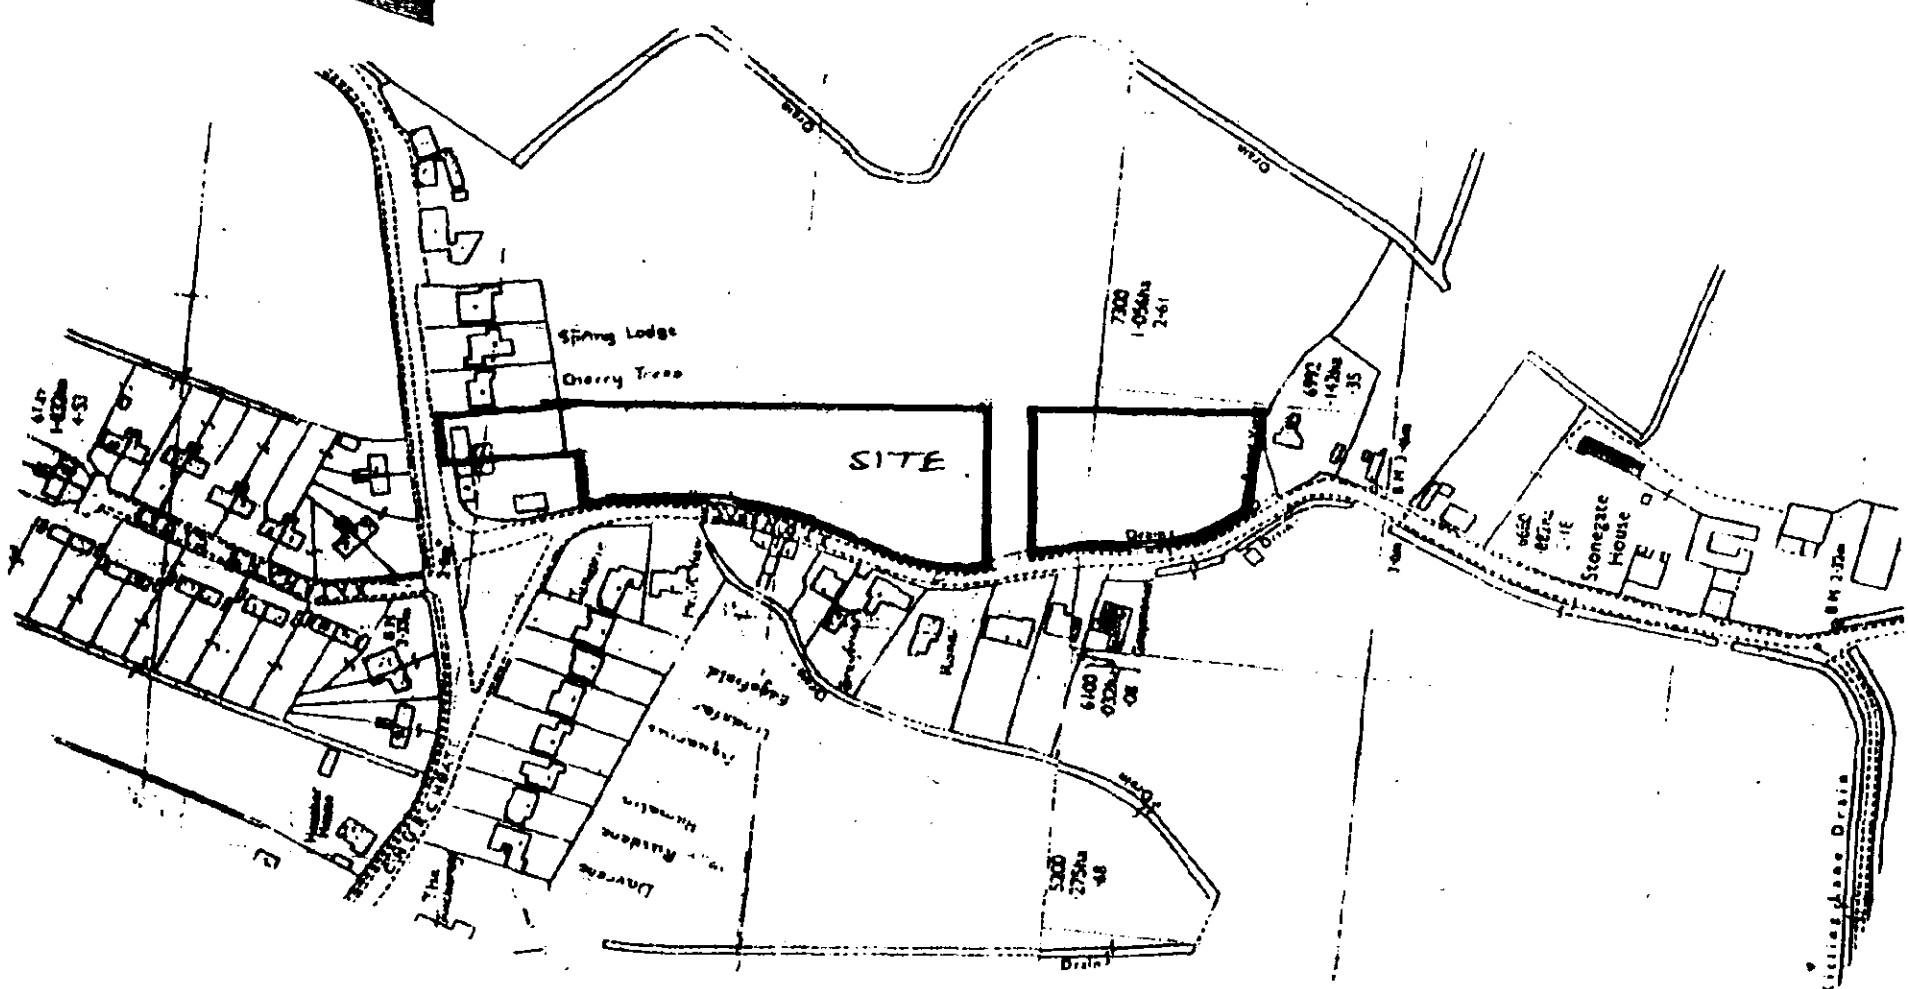

LOCATION PLAN

THIS DRG. TO BE READ IN CONJUNCTION WITH ULLSWATER, LANGDALE, DERWENT, CONISTON, G.T.L./D.G./1, G.T.L./D.G./2 & HARLITE INFORMATION DATED 12.8.98

B - PLOT ADDED - 7.4.99
 A - DRAINS ETC. - 26.3.99

DESIGN

Status

CONSULTANTS IN ARCHITECTURE & PLANNING

RESIDENTIAL DEVELOPMENT AT STONEGATE, GEDNEY FOR

G. T. L. DEVELOPMENTS

SUPERMARKET


1500 771987/4

NOV-98 B.GILHAM.


2 Edinburgh Walk, Helbeach, Spalding, Lincs. PE12 7AP.

Tel: 01406 424343 Fax: 01406 490702


PROPOSED CONSERVATORY TO PLOT 3.
SEE DRG. 000046

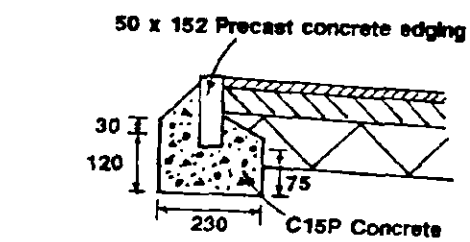

FOOTWAY SPECIFICATION
25 of 6 nom. dense bit. mac. wearing course
50 of 20 nom. dense bit. mac. basecourse
100 of Type 1 aggregate sub-base

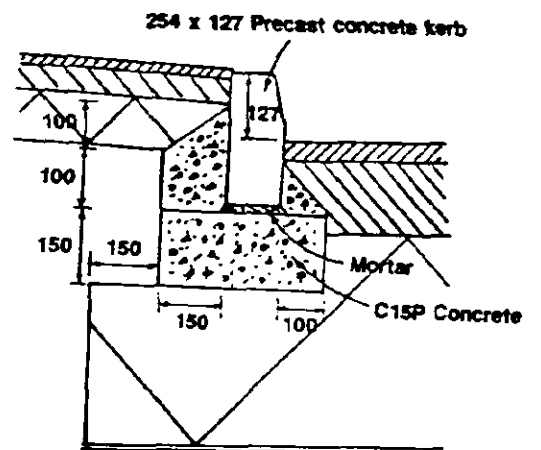

CARRIAGEWAY SPECIFICATION
40 of Hot Rolled Asphalt wearing course with pre-coated chippings
150 of 20 nom. dense bit. mac. basecourse
450 of Type 1 aggregate sub-base
Geotextile

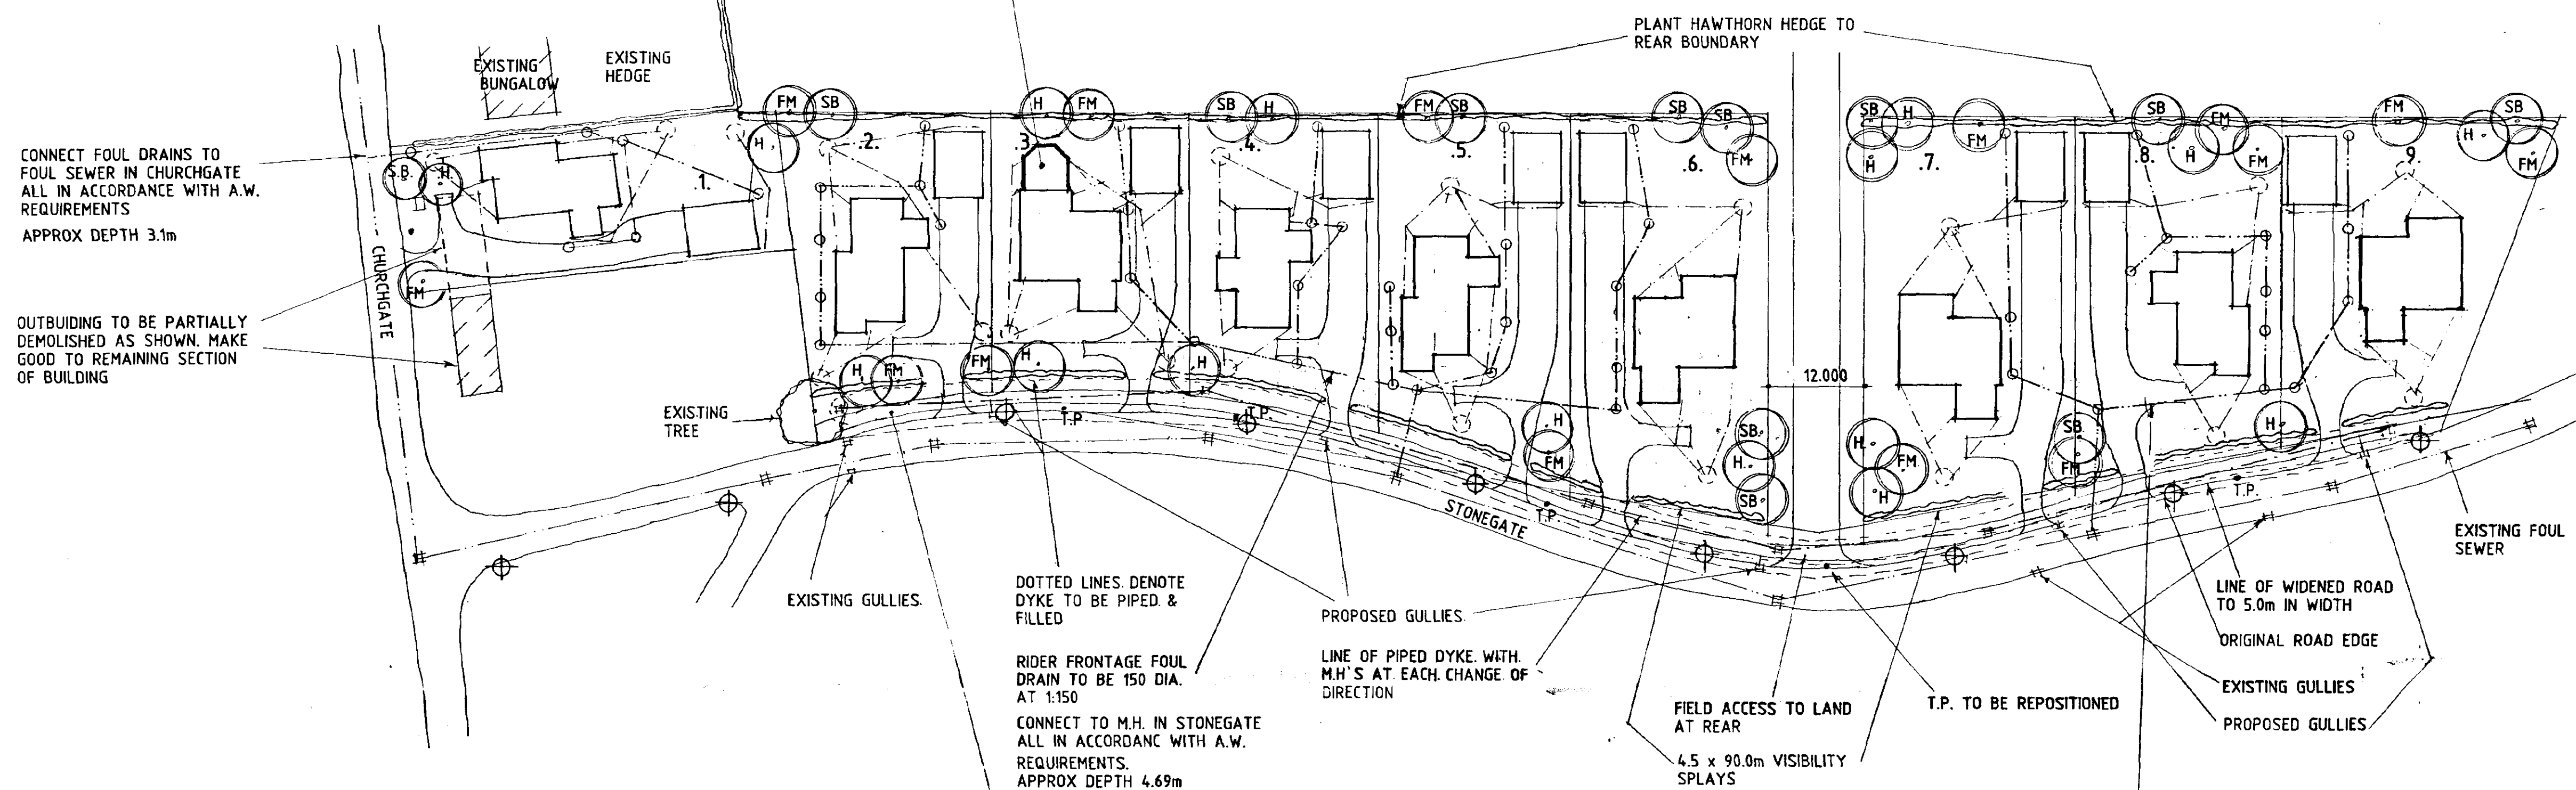

SITE PLAN

- DWELLINGS**
- PLOT 1 - ULLSWATER
 - PLOT 2 - ULLSWATER
 - PLOT 3 - LANGDALE - 2
 - PLOT 4 - DERWENT
 - PLOT 5 - ULLSWATER
 - PLOT 6 - LANGDALE - 2 - HANDED
 - PLOT 7 - LANGDALE - 2
 - PLOT 8 - ULLSWATER - HANDED
 - PLOT 9 - LANGDALE - 2 - HANDED
- GARAGES**
- GTL/SD/1 - TO PLOTS - 1,2,3,4,5,7
 - GTL/SD/1-HANDED - TO PLOTS - 6,8,9

Notes & Revisions

Do not scale from this drawing.


This drawing is copyright and may not be altered, traced, copied, photographed or used for any purpose other than that for which it is issued without written permission from Messrs. Status Design.

The General Contractor is to check all dimensions on site and report discrepancies to the Architect.

All details shown on this drawing are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions unless reported to the Architect so that design amendments may be considered.

Please note: This drawing is not a conveyance drawing.

Construction work to be carried out with due regard to the Construction (Design and Management) Regulations 1994 (CDM) and the Health and Safety at Work, etc. Act 1974 (HSA Act).

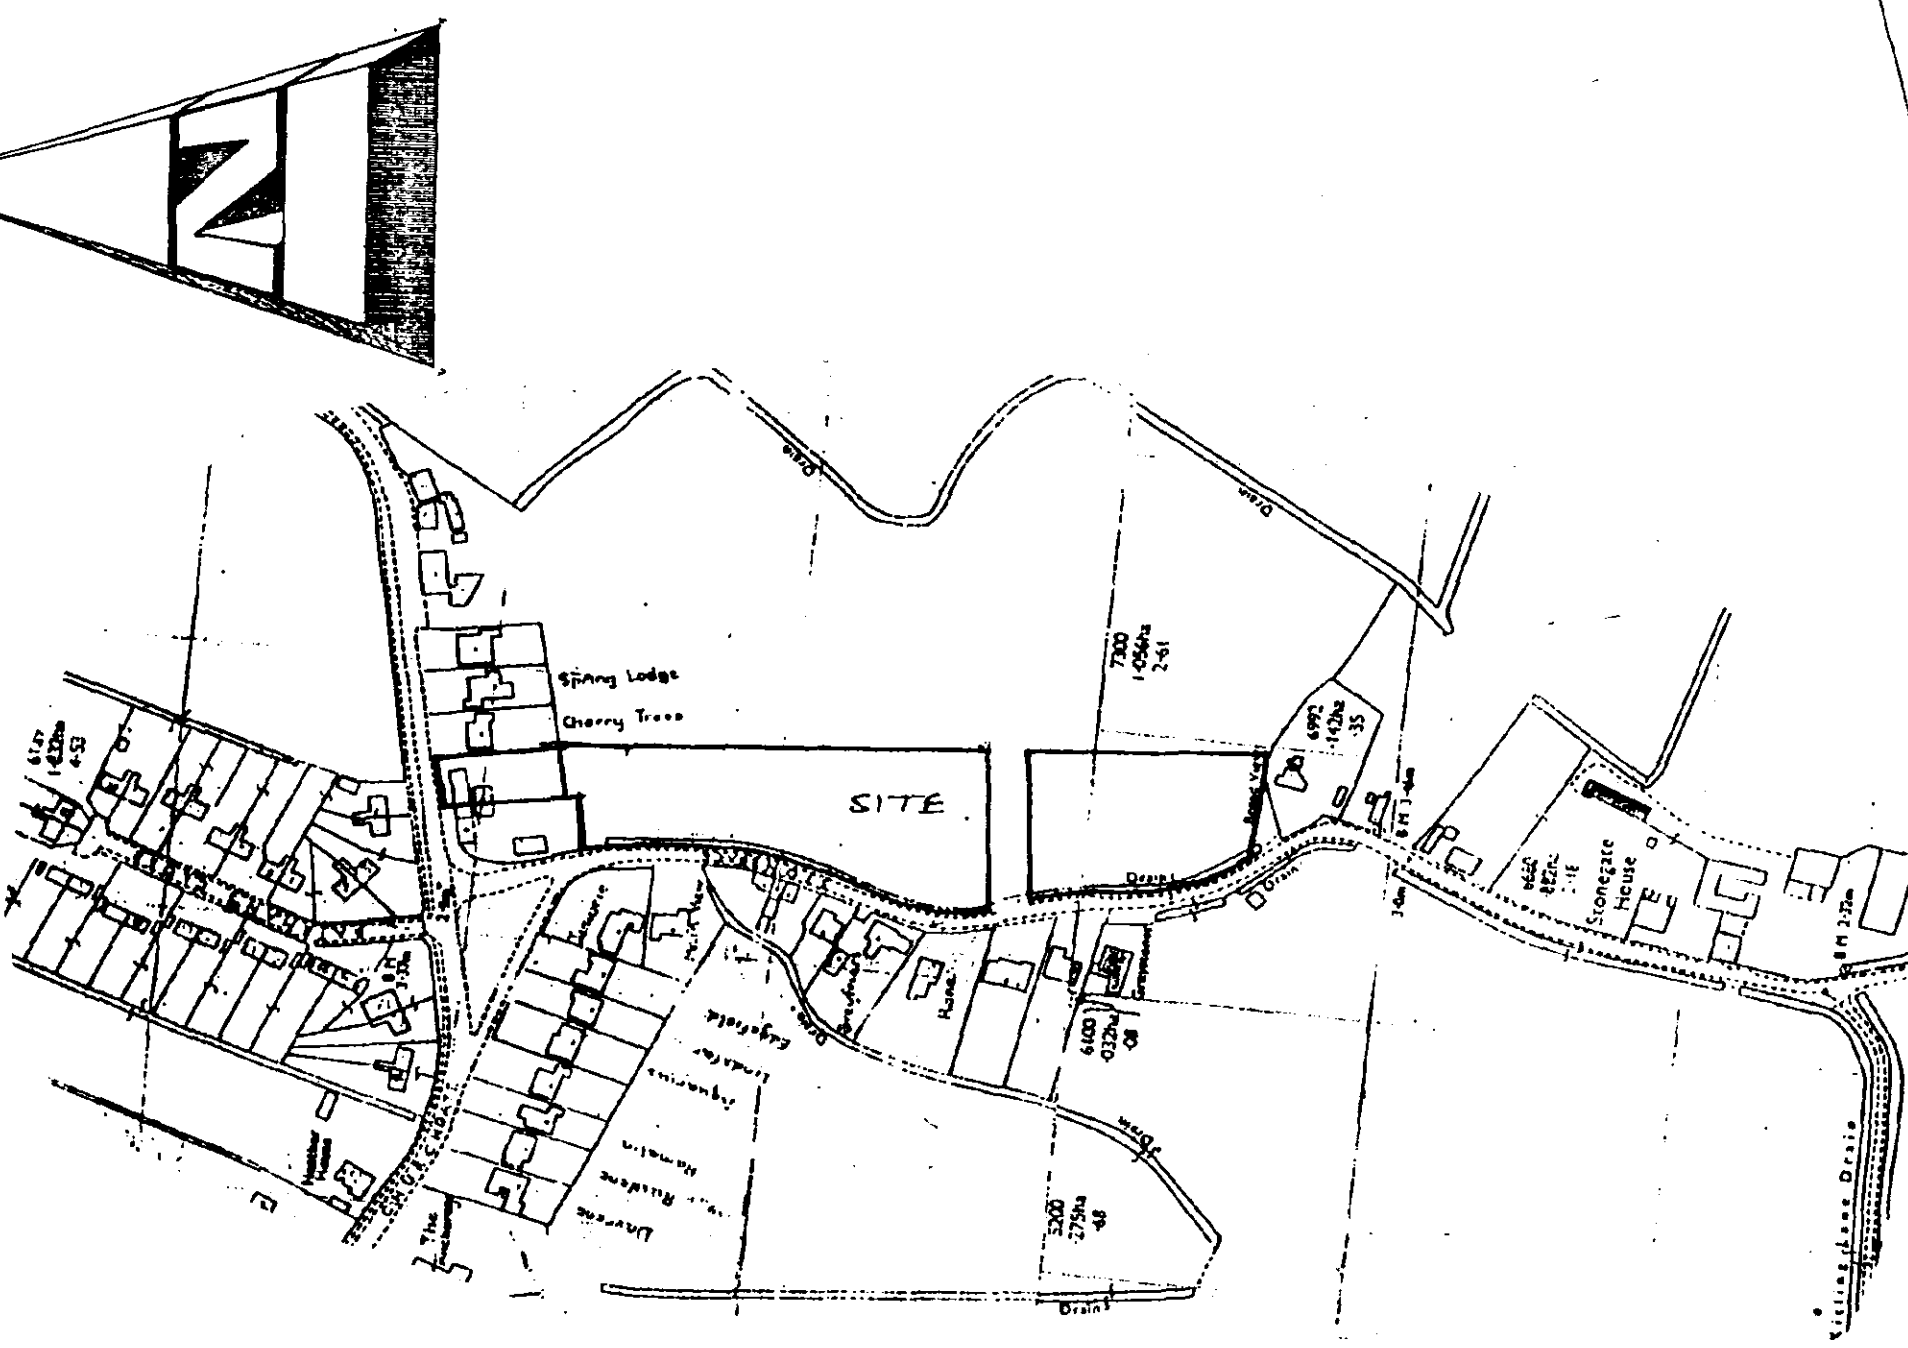

LOCATION PLAN

STREET LIGHTS

5 METRE COLUMN TYPE 3 MIO (APP 19/3) WITH POST TOP MOUNTED LANTERN TO APP 14/2 (URBIS SAPPHIRE 1 OR EQUIVALENT) & 1.6 SETBACK FROM KERBFACE. APPROX SPACINGS = 30m

External Materials

Marley Mendip, Old English Dark Red roof tiles to Plots 1, 2, 3 & 4.

Marley Mendip, Smooth Grey roof tiles to Plots 5, 6, 7 & 8.

LBC Kempston, Cantata Antique facing bricks to Plots 1 & 2.

LBC Kempston, Seville Antique facing bricks to Plots 3 & 4.

LBC Kempston, Andante Golden Buff facing bricks to Plots 5 & 6.

LBC Kempston, Mozart Blend facing bricks to Plots 7 & 8.

HAWTHORN HEDGE

HAWTHORN HEDGE TO BE PLANTED IN 2ND ROWS STAGGERED AT 450 C/C & PLANTS TO BE 450 HIGH ON PLANTING

Drives
Washed gravel on 100mm consolidated hardcore. Concrete edging kerbs.

Turfing
Provide turning bays from garages as shown all to local authority requirements.

Accesses
Accesses to be minimum 2.5m wide and constructed all in accordance with Lincolnshire County Council requirements.

Dyke
Dyke to site frontage to be piped with solid concrete pipes 450mm diameter and to be connected to existing 600mm diameter pipe outlet. Levels and falls to suit existing outlet. New road gullies as shown to be connected into new pipeline. All works to be in accordance with Lincolnshire County Council and South Holland Internal Drainage Board requirements.

Road Improvements
Road frontage to site along Stonegate to be widened to a minimum width of 5m. All works to conform to Lincolnshire County Council Development Road Specification and Construction 1997.

Landscaping
Plant trees as shown, minimum height on planting to be 2m.

SB - Silver birch
FM - Field maple
H - Hawthorn

To site frontage where shown plant hawthorn hedge.

Foul Drainage
Connect to existing foul drainage system in Church Gate and Stonegate as shown.

Street Lighting
6 no. high pressure sodium 5m tubular street lighting columns with post top mounted Philips ME70TG*1 lantern for 70 watt SON-T lamp and SELC ECU.

Existing lighting to be removed.

For street lighting details and specification etc. see Harlite information dated 12.08.98.

THIS DRG. TO BE READ IN CONJUNCTION WITH
ULLSWATER, LANGDALE, DERWENT, CONISTON, GTL/SD/1
& HARLITE INFORMATION DATED 12.8.98
STREET LIGHT DESIGN BY LCC DATED 30.8.01- REFS05230/175

H - PLOT 5, 6 & 9 DESIGN ALTS - 6.11.01
G - CONSERVATORY TO PLOT 3 - 30.10.01

F - STREET LIGHT ALTS - 31.8.01
E - GARAGE ALTS - 19.10.00
D - HEDGE DETAILS - 15.10.99
C - HEDGE ADDED - 18.6.99
B - PLOT ADDED - 7.4.99
A - DRAINS ETC. - 26.3.99



SOUTH HOLLAND DC
HOUSING & PLANNING
- 7 NOV 2001
Ref: 1251/98

STATUS
DESIGN
CONSULTANTS IN ARCHITECTURE & PLANNING


RESIDENTIAL DEVELOPMENT
AT STONEGATE, GEDNEY
FOR
G. T. L. DEVELOPMENTS

1:500 771987/4
NOV-98 B.GILHAM.


AMENDED PLAN

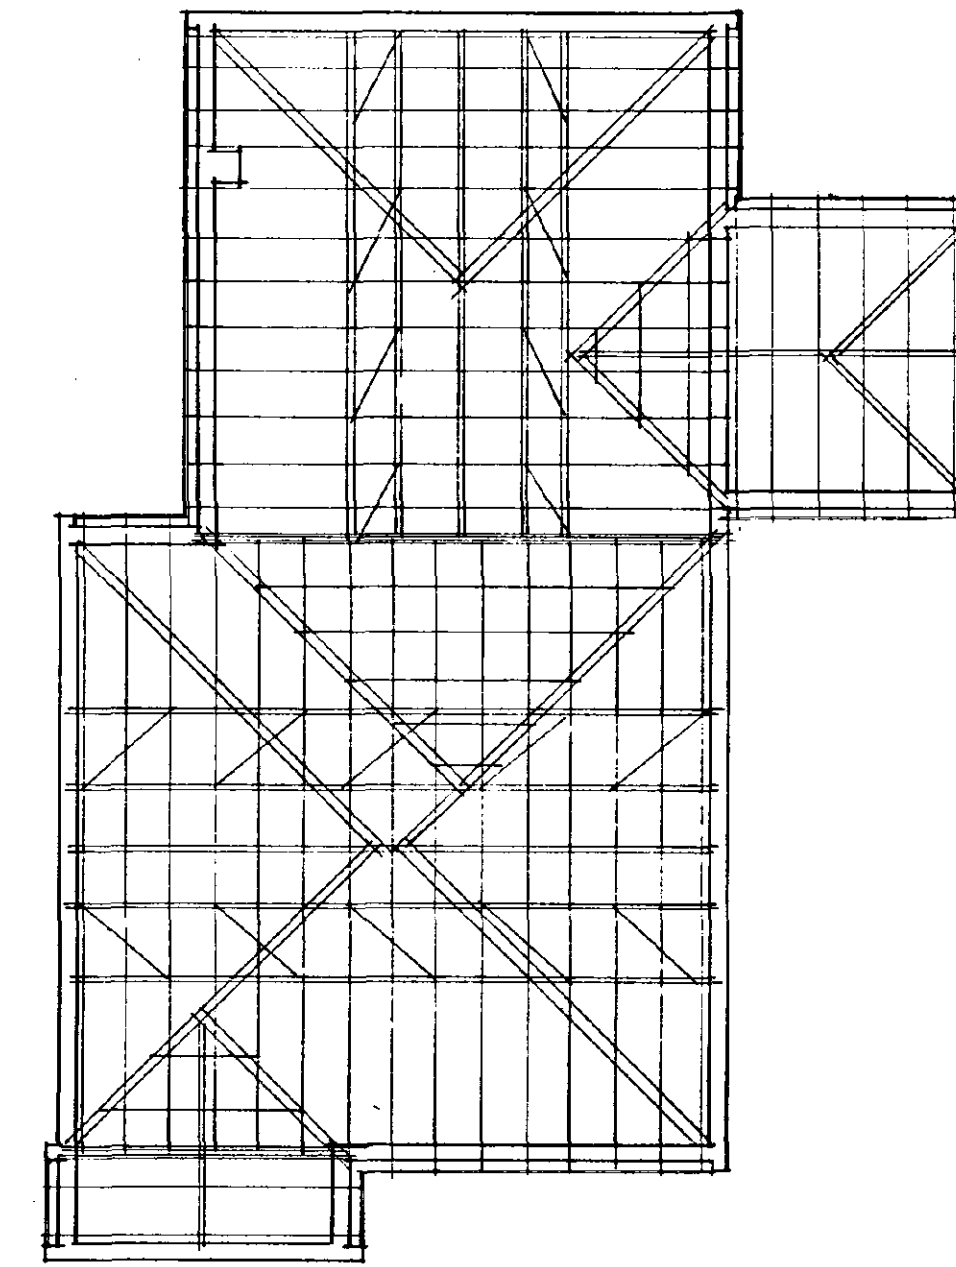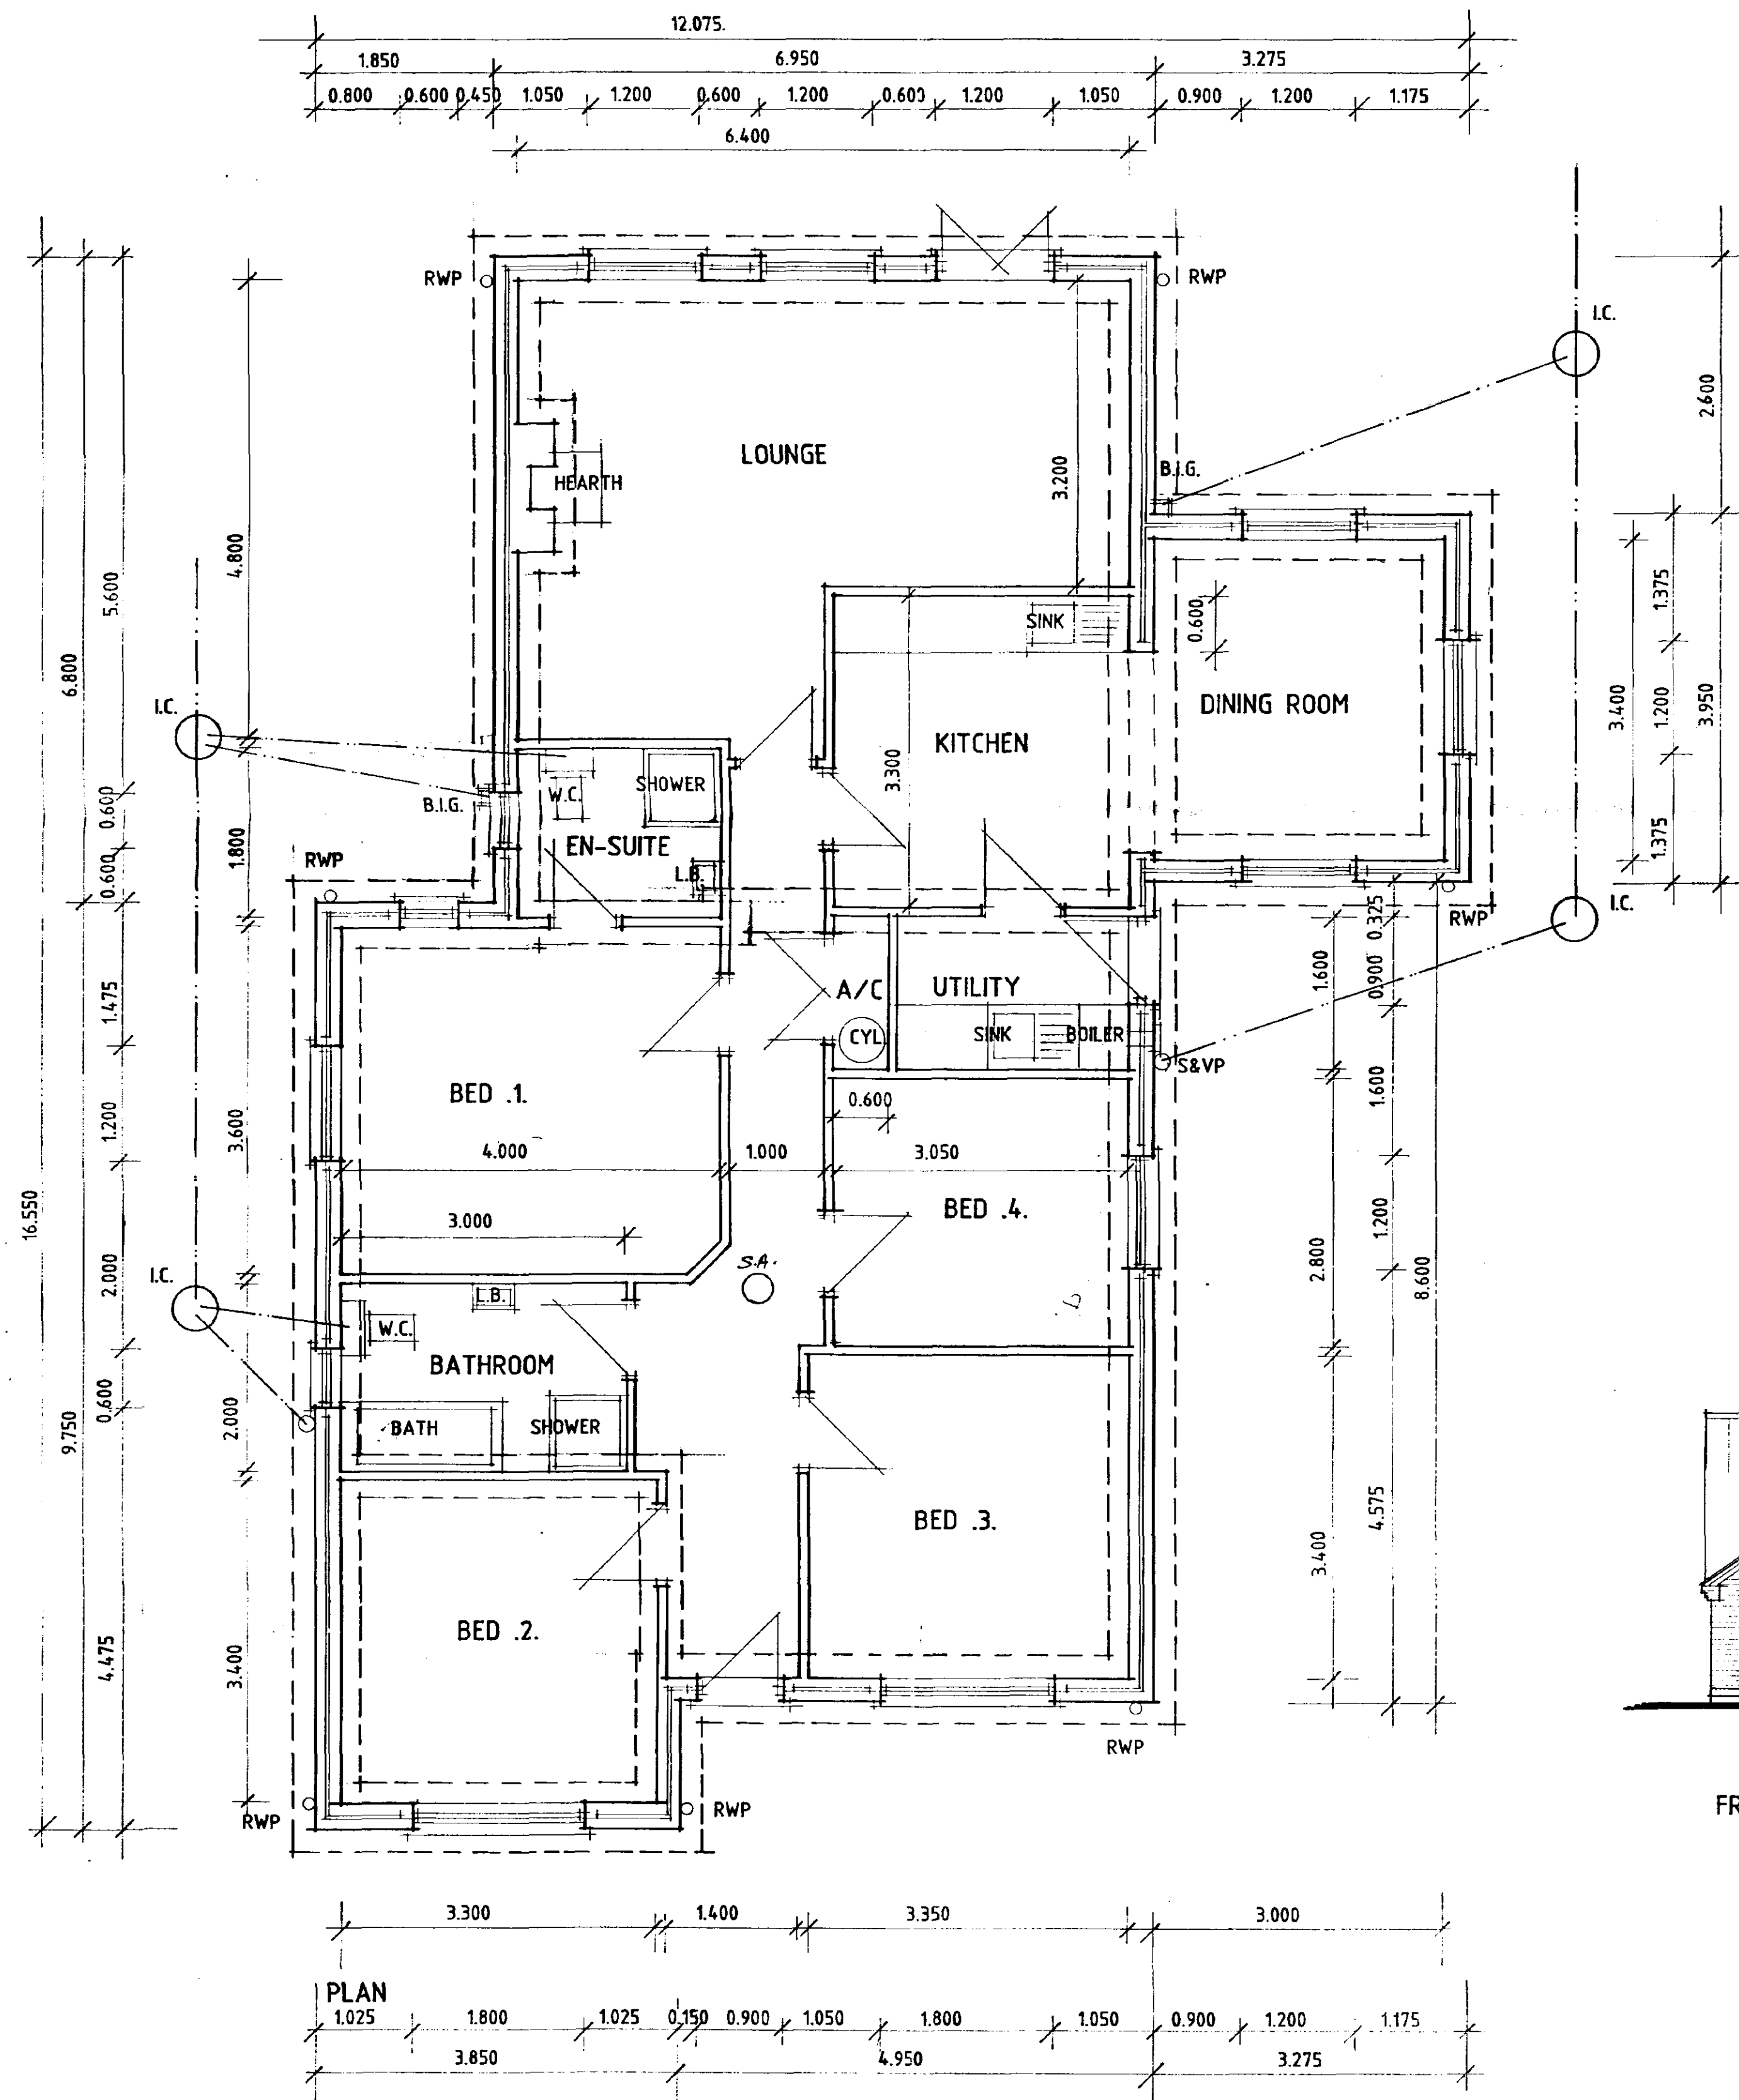


ROOF PLAN

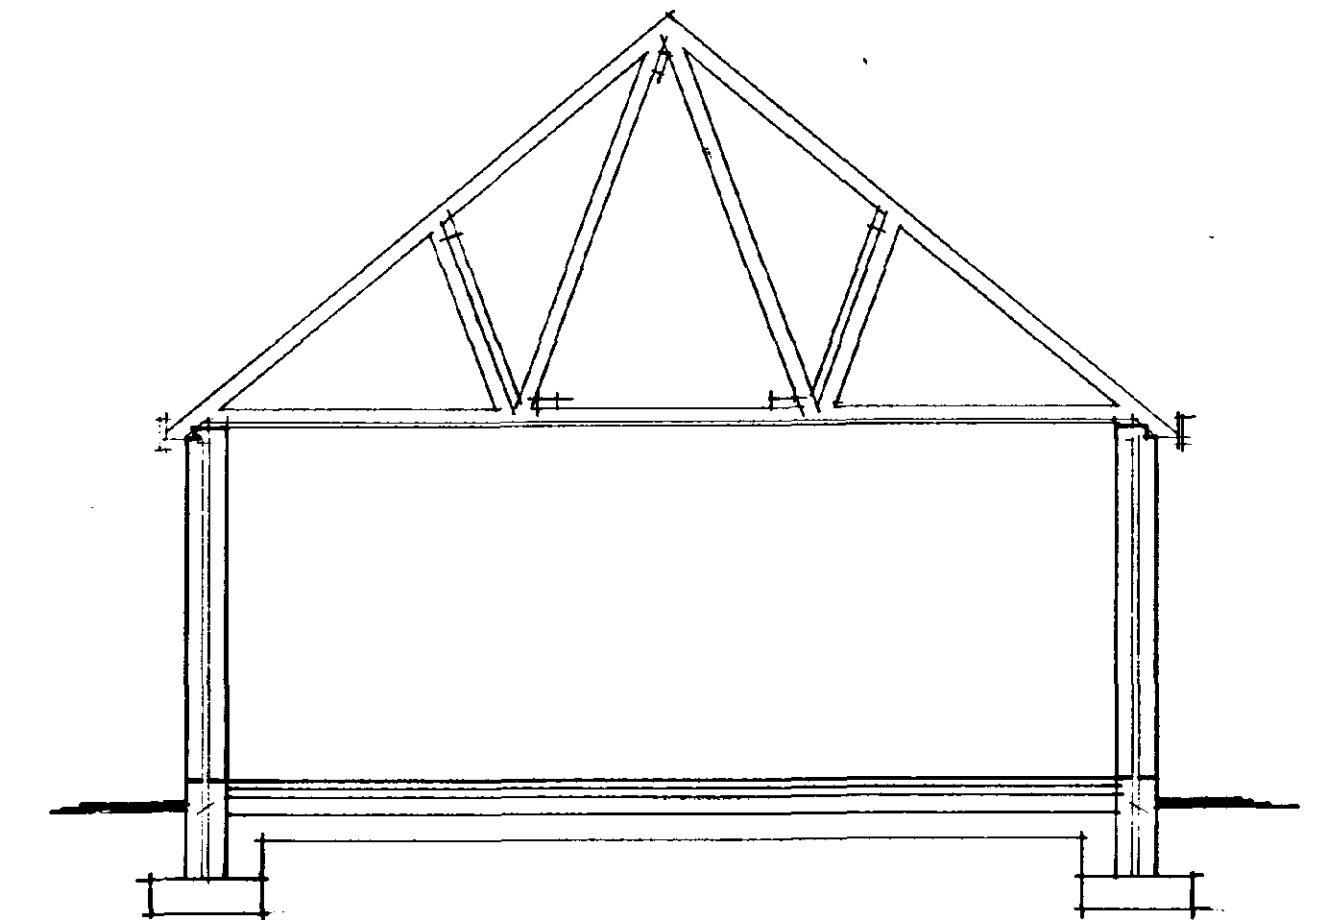


SECTION

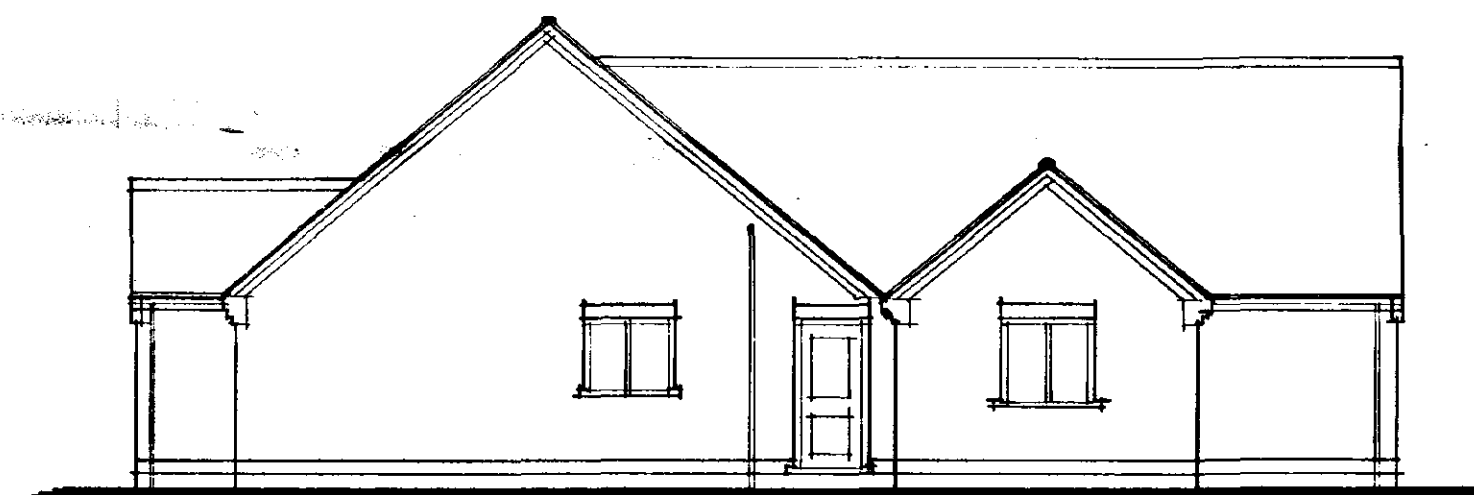


SIDE

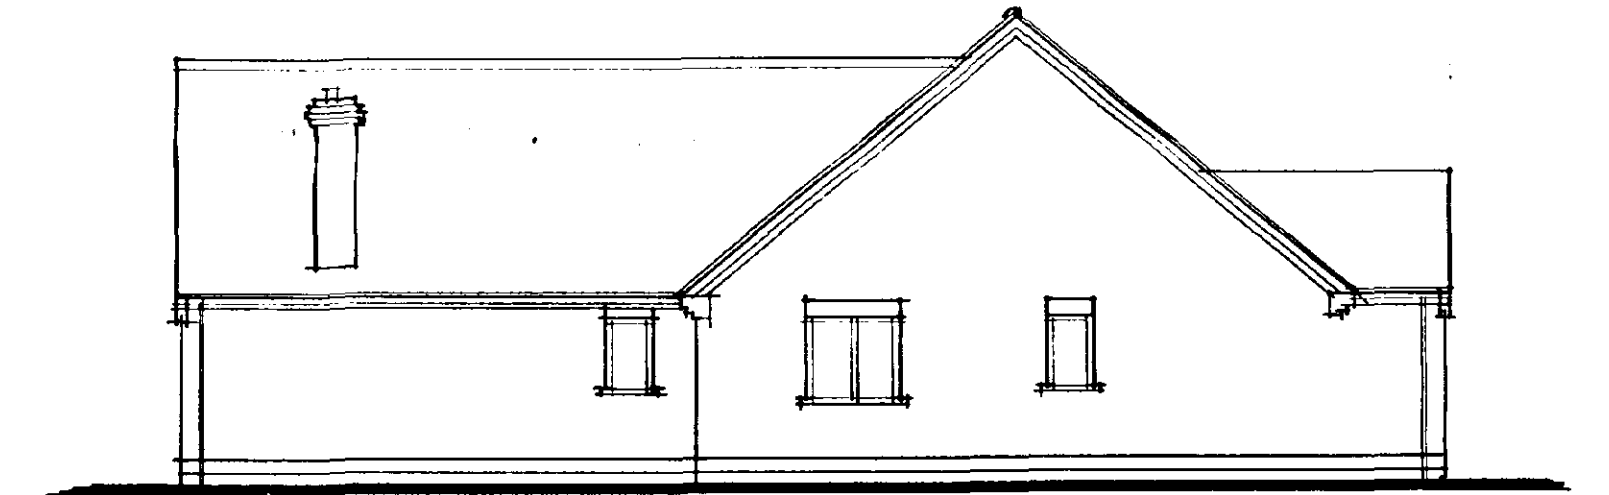

SIDE

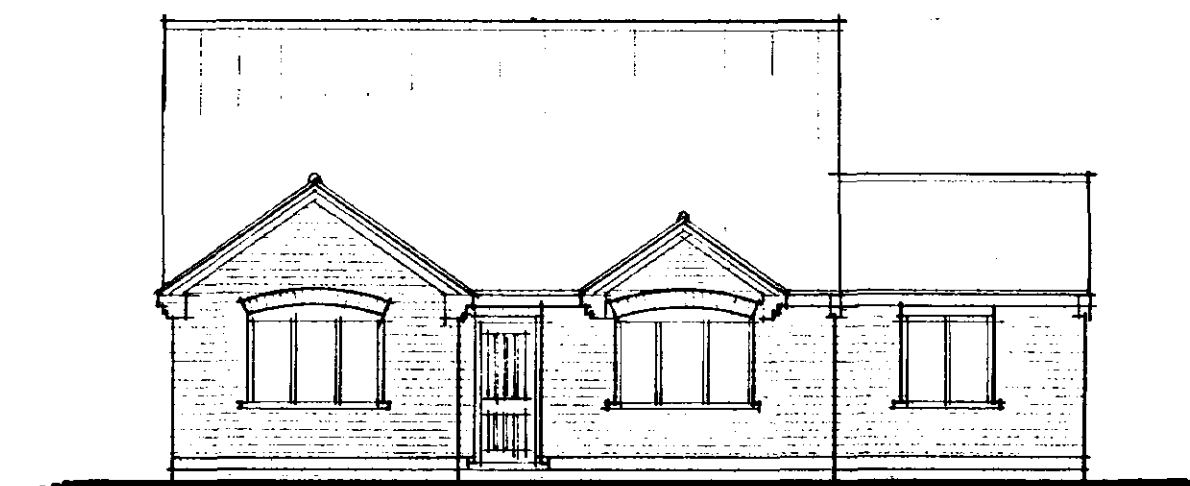

FRONT

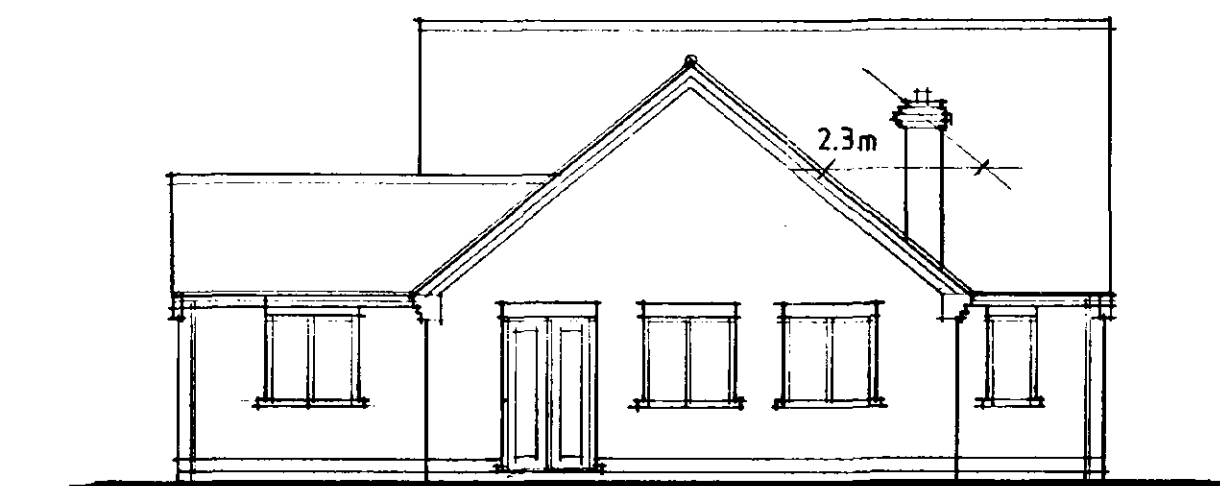

REAR

THIS DFRG. TO BE READ IN CONJUNCTION WITH
TECHNICAL INFORMATION - 771987

A-SMOKE DETECTOR - 3.8.98
Status
DESIGN
CONSULTANTS IN ARCHITECTURE & PLANNING

G. T. L. DEVELOPMENTS
LTD.

ULLSWATER


1:50 1:100 | APRIL-98

B.GILHAM.



SOUTH HOLLAND DC
HOUSING & PLANNING
-7 NOV 2001
Ref. 1251/98

AMENDED PLAN



2 Edinburgh Walk, Holbeach,
Spalding, Lincs. PE12 7AP
Tel: 01406 424343 Fax: 01406 490702

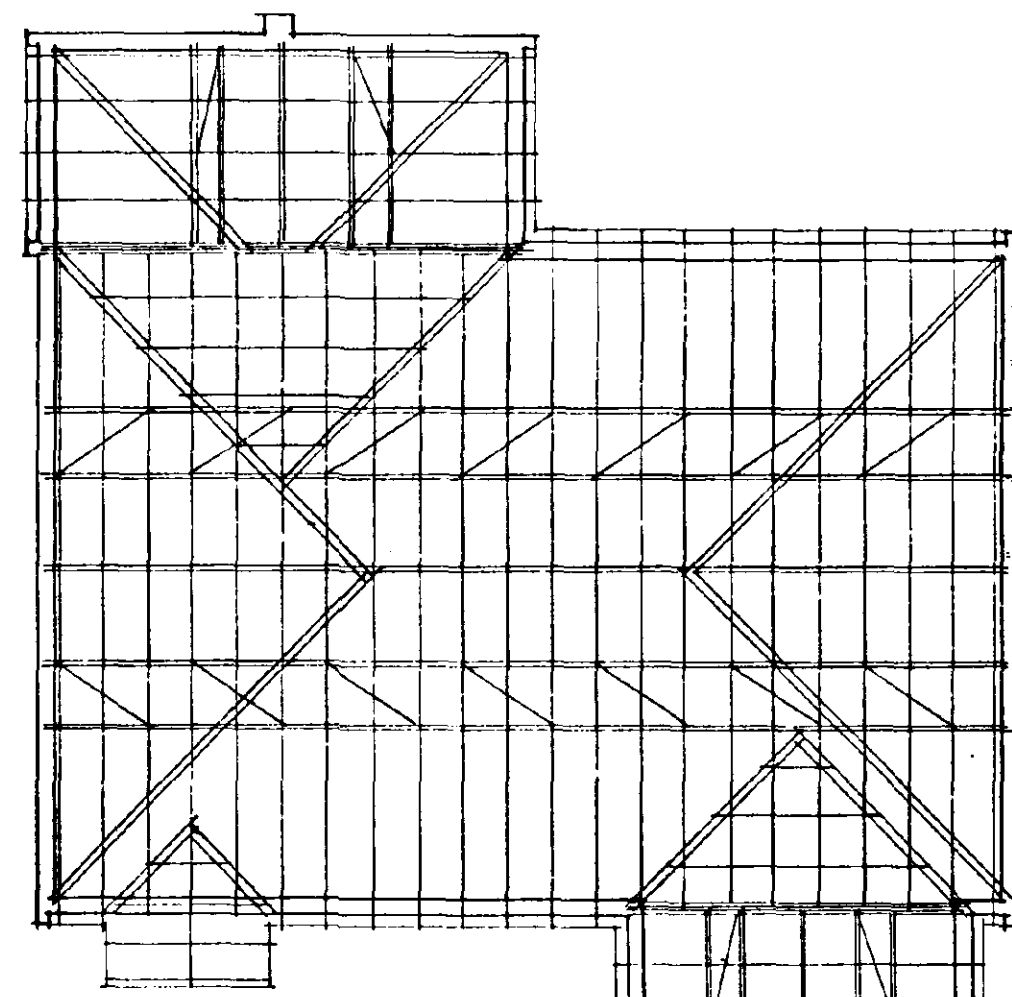


ROOF PLAN

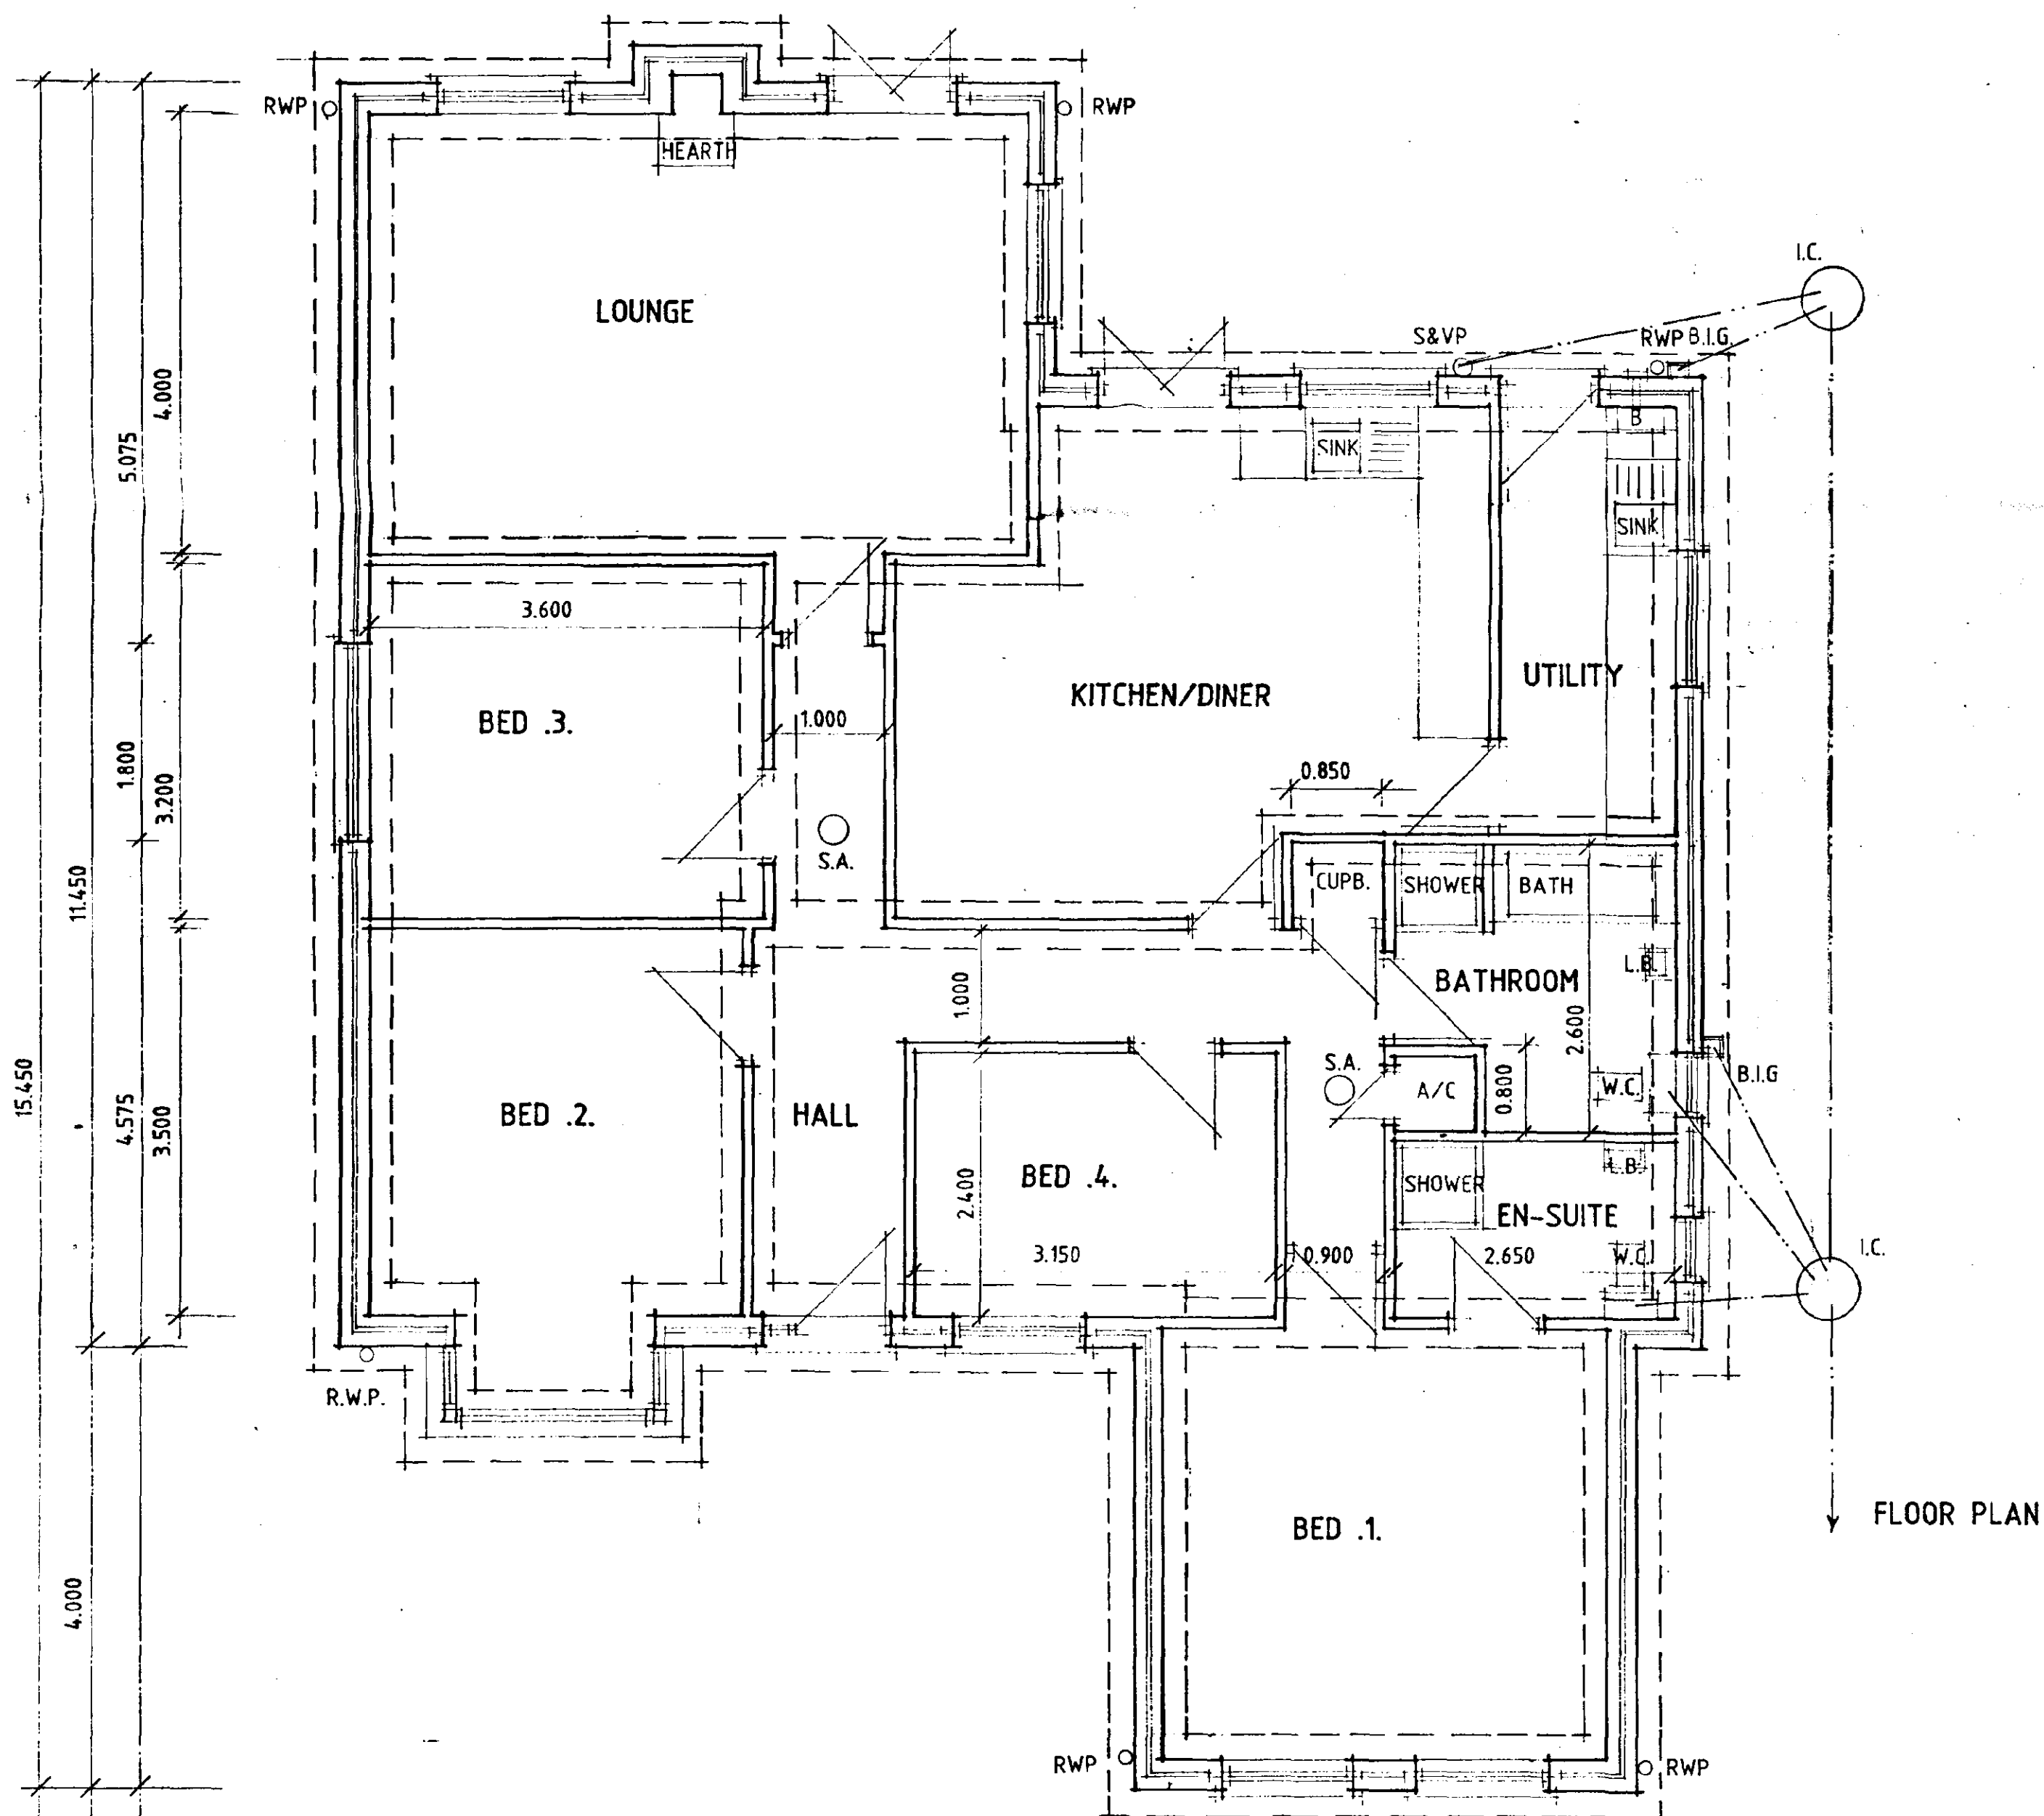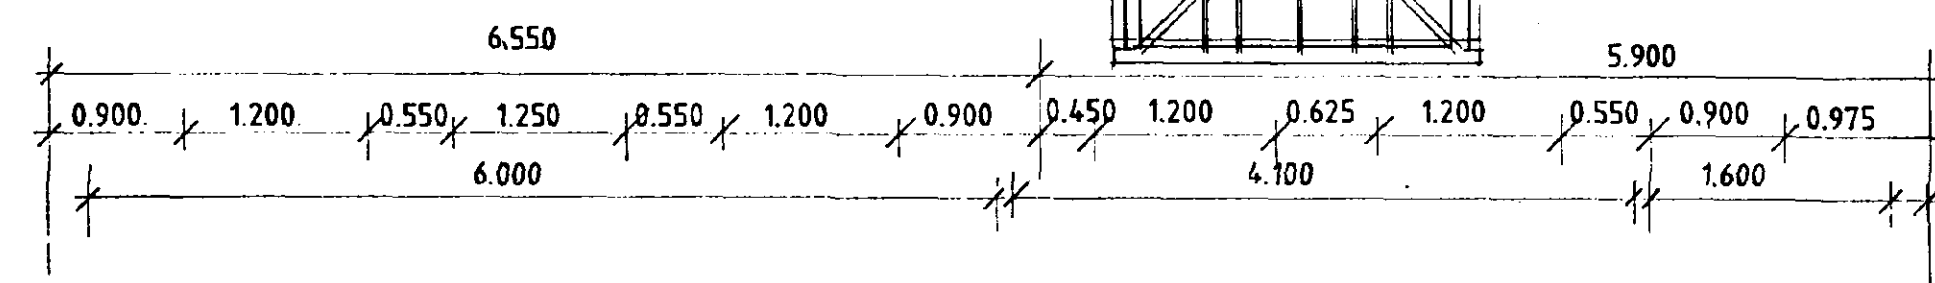


FLOOR PLAN

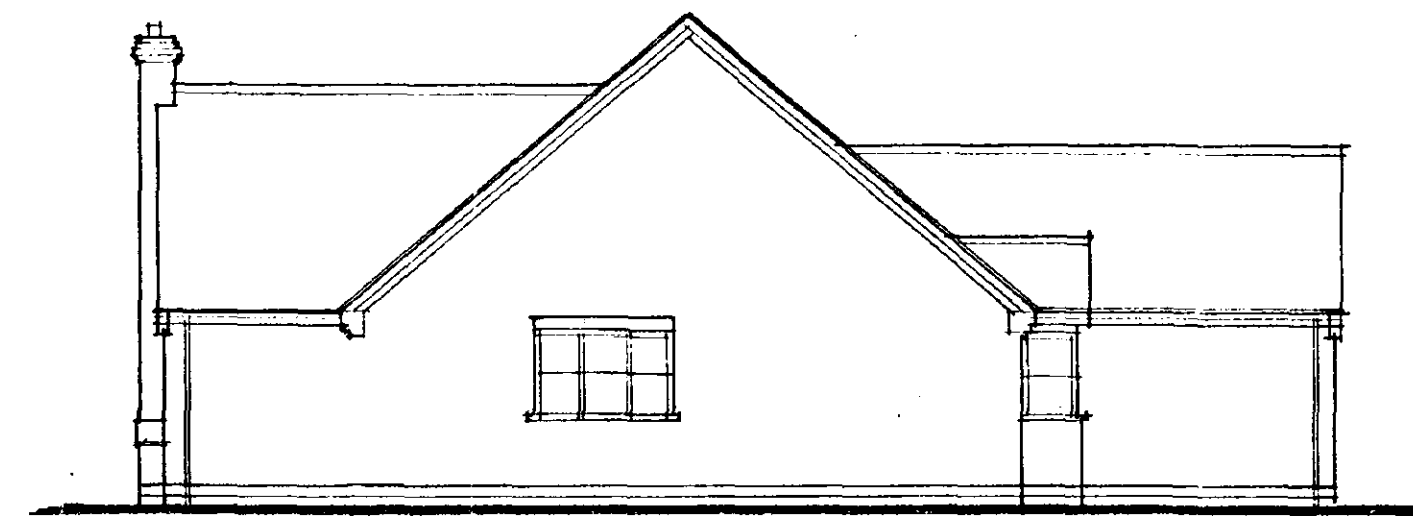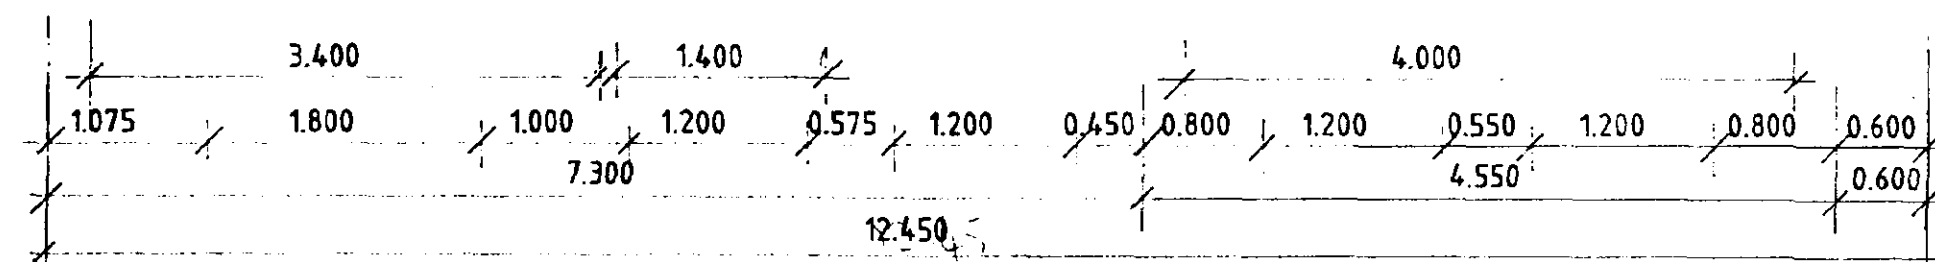

SIDE

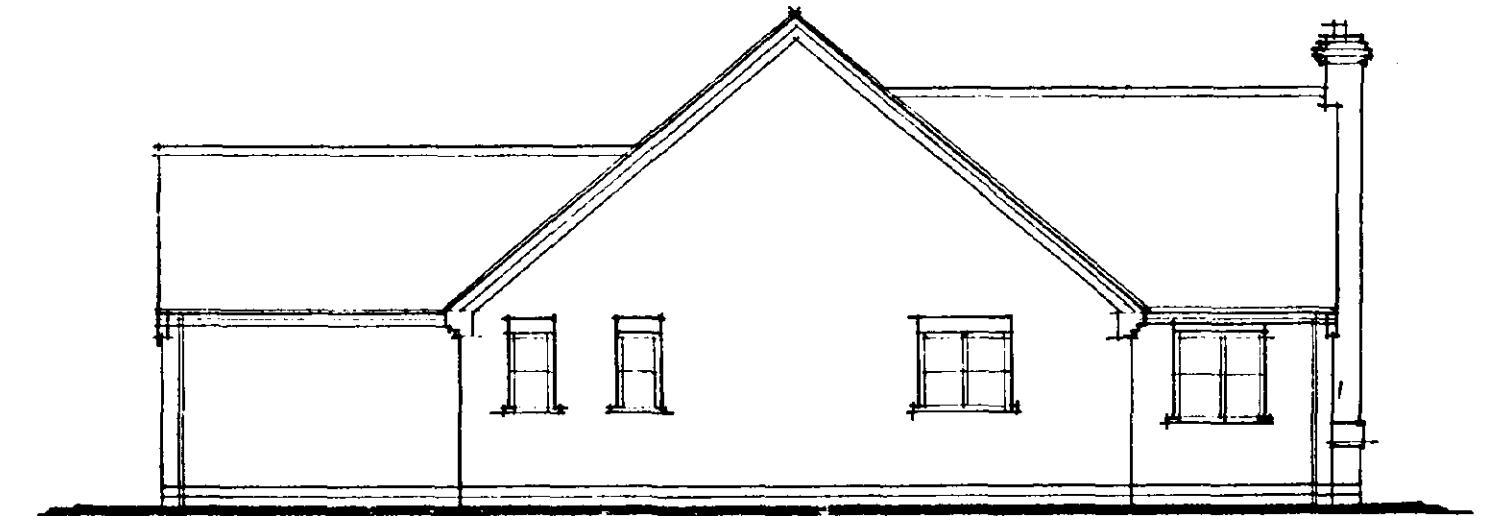


SIDE

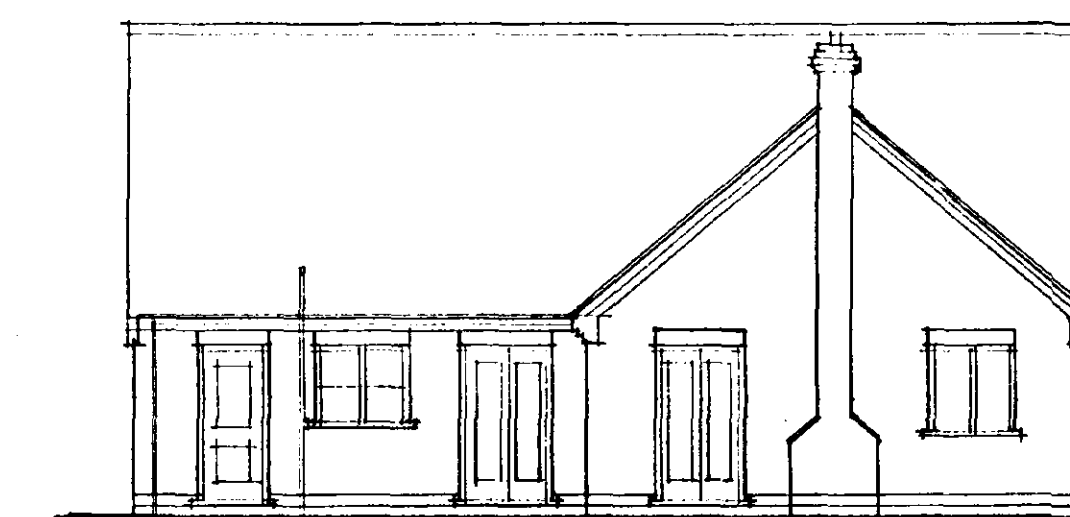


NOTES

- I.G. L1/S75 LINTELS TO OPENINGS IN CAVITY WALLS
- GARAGE CEILING TO HAVE 12.7 PLASTERBOARD & SKIM
- ALL WINDOWS & DOORS TO BE SEALED UPVC
- ROOF & WALL INSULATION TO BE CONTINUOUS

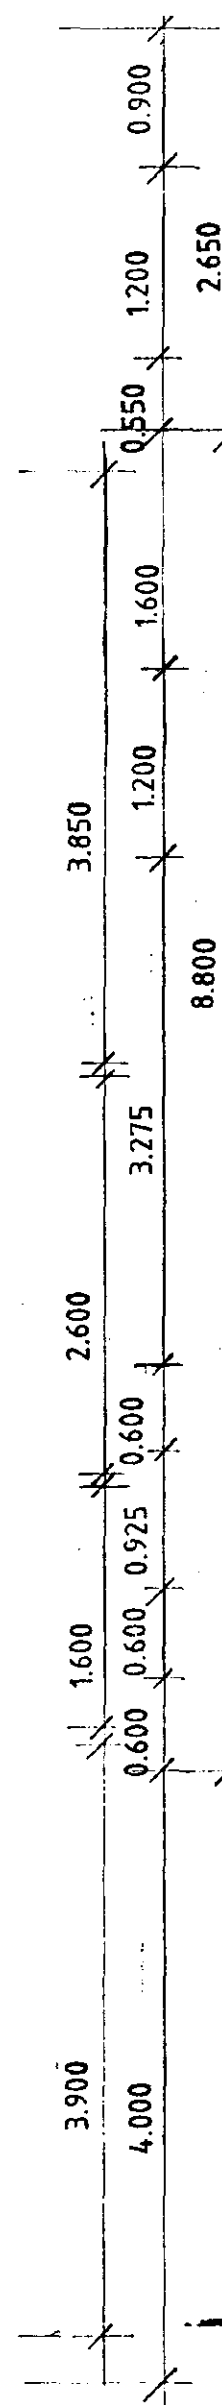

FRONT.

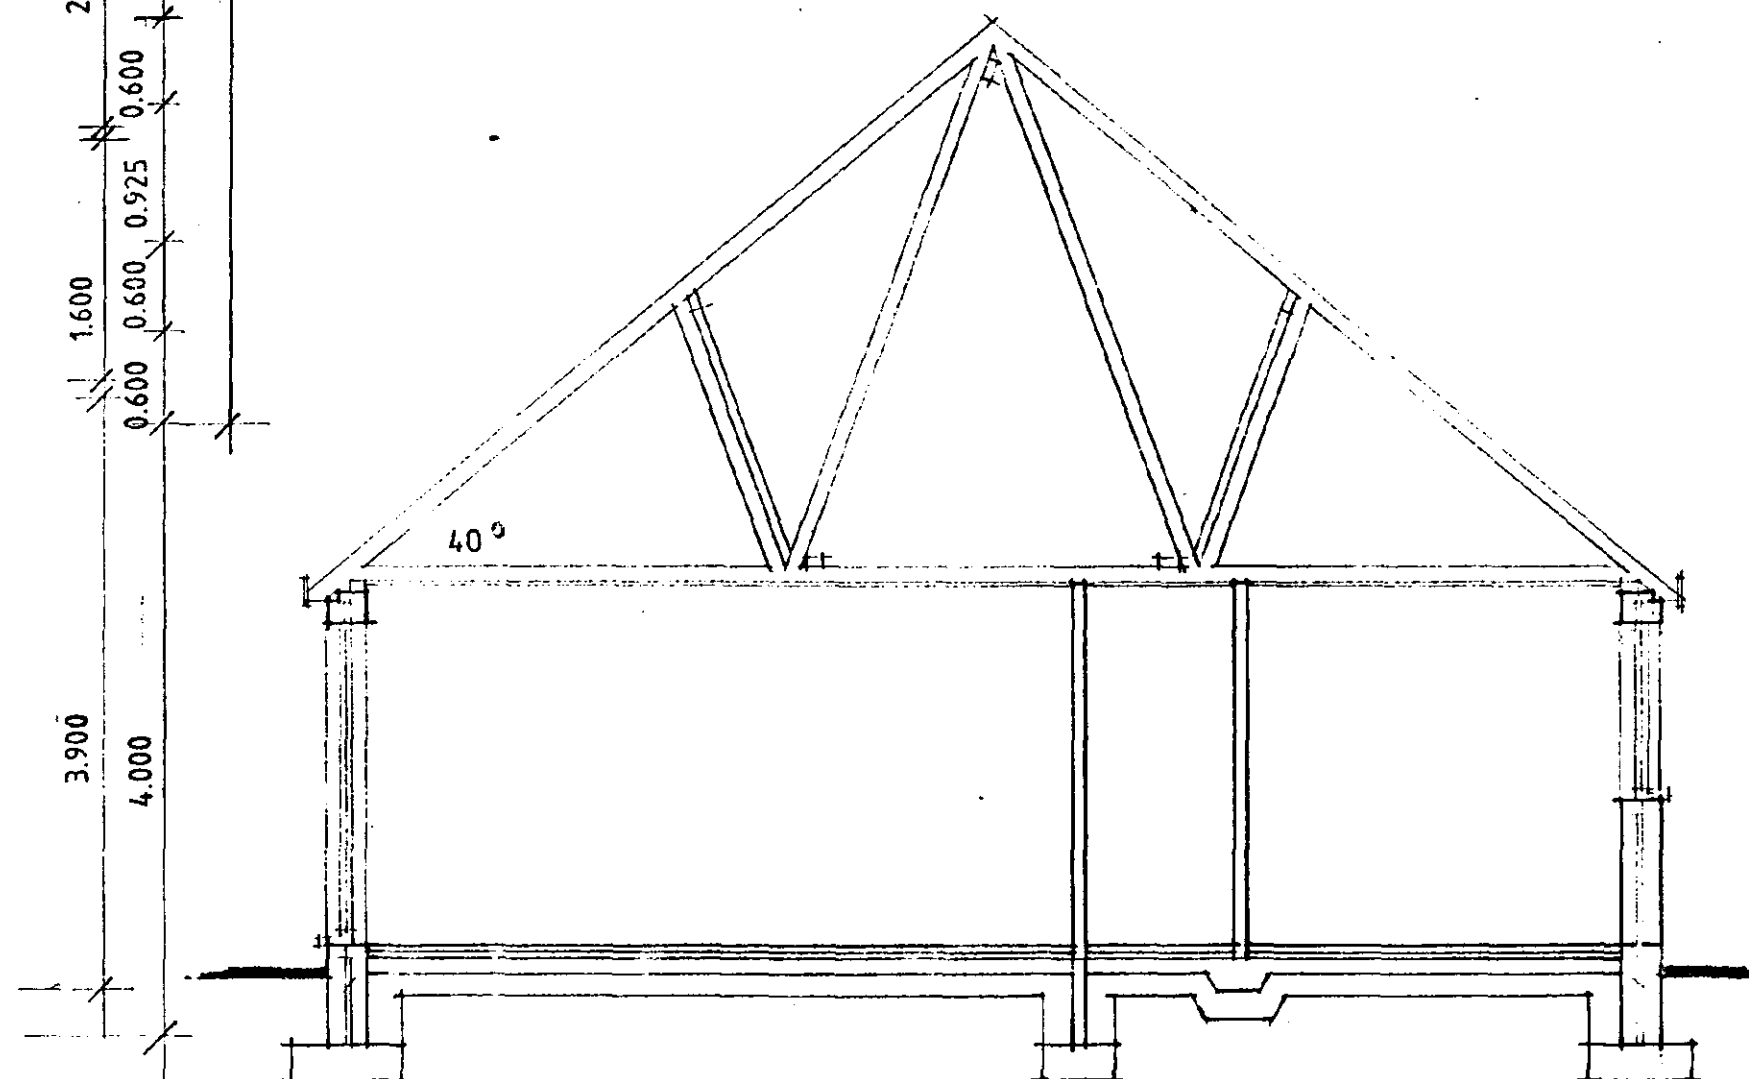

SECTION

THIS DRG. TO BE READ IN CONJUNCTION WITH TECHNICAL INFORMATION - GTL/TI

A - 3.6.99 - B.R. ALTS.
STATUS
DESIGN
CONSULTANTS IN ARCHITECTURE & PLANNING

G. T. L. DEVELOPMENTS LTD.

LANGDALE-2

1:50 1:100 | NOV-98


B.GILHAM.

SOUTH HOLLAND DO
HOUSING & PLANNING
-7 NOV 2001

2 Edinburgh Walk, Holbeach,
Spalding, Lincs. PE12 7AP.
Tel: 01406 424363 Fax: 01406 490702

AMENDMENT PLAN

Ref. 112

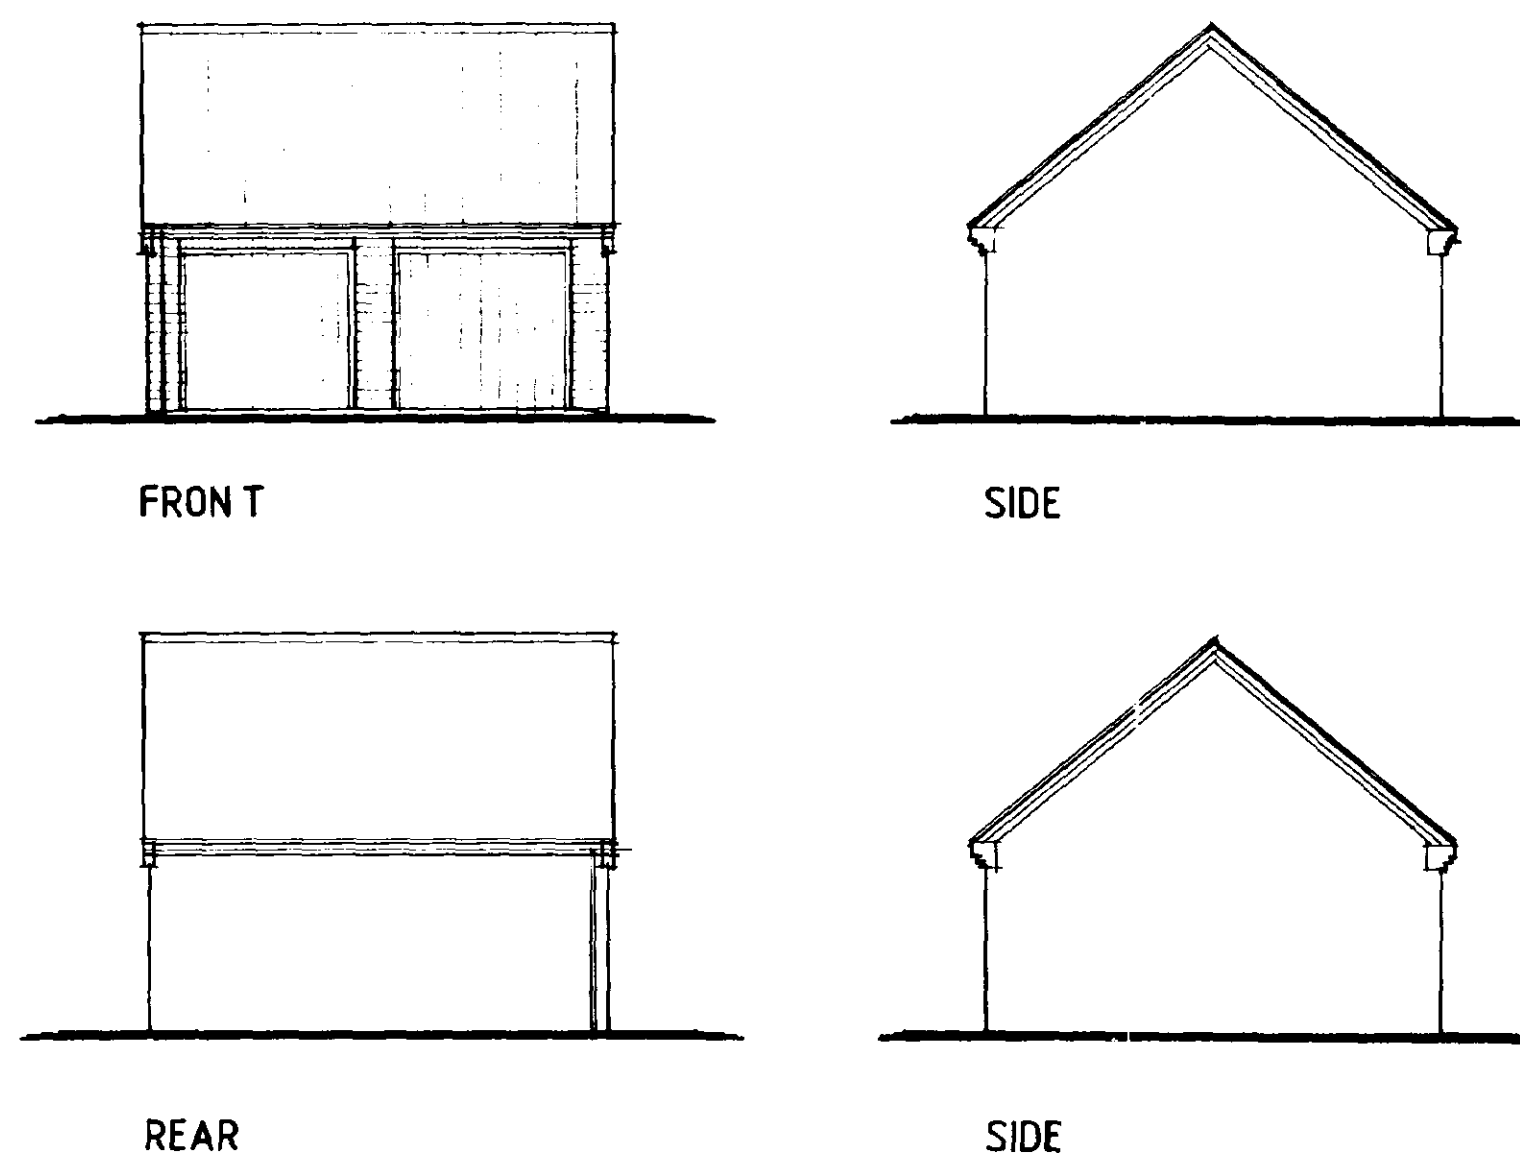


SUBSTRUCTURE WALLING
100mm Class A dense concrete blocks. Butumen felt d.p.c. to external walls 150mm above ground level. Weak mix infill to base of cavities to terminate 225mm below lowest d.p.c. level.

FOUNDATIONS
As indicated on plan provide concrete strip foundations. To cavity walls provide 700mm wide x 225mm thick and to 100mm walls provide 450mm wide x 225mm thick, unless noted otherwise. To non-loadbearing internal walls thicken out ground floor oversite concrete to 450mm wide x 200mm thick. Widen foundations at chimney breast accordingly and make 300mm thick. Foundations to taken down to an approved firm base, subject to local authority specifications. Concrete to be ST3 grade unless noted otherwise.


SURFACE WATER DRAINAGE
To be proprietary 110mm diameter P.V.C. pipes flexible jointed to fall 1:70 bedded in 100mm pea gravel. Pipes to discharge into 1200mm diameter soakaways sited 5000mm away from buildings.

PROTECTION TO UNDERGROUND PIPES
Where pipes are not under road and have less than 600mm cover concrete paving slabs should be laid as bridging above the pipes on minimum 75 pea gravel. If flexible pipes are under a road and have less than 900mm cover reinforced concrete bridging should be used instead of paving slabs.

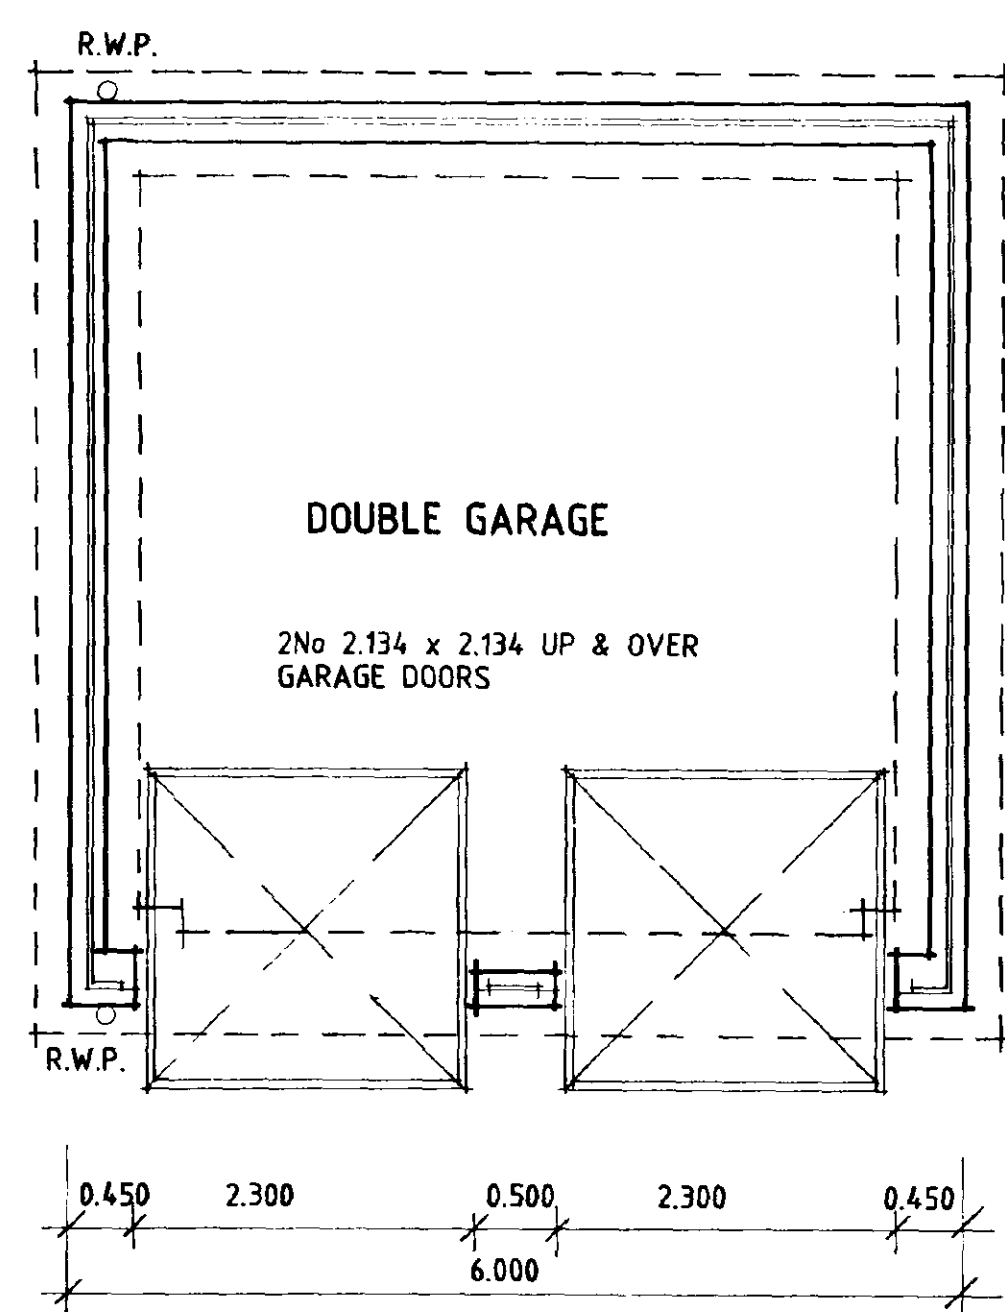

PLAN
G.T.L/D.G/1

I.G. L1/S LINTELS.
UPVC WINDOWS

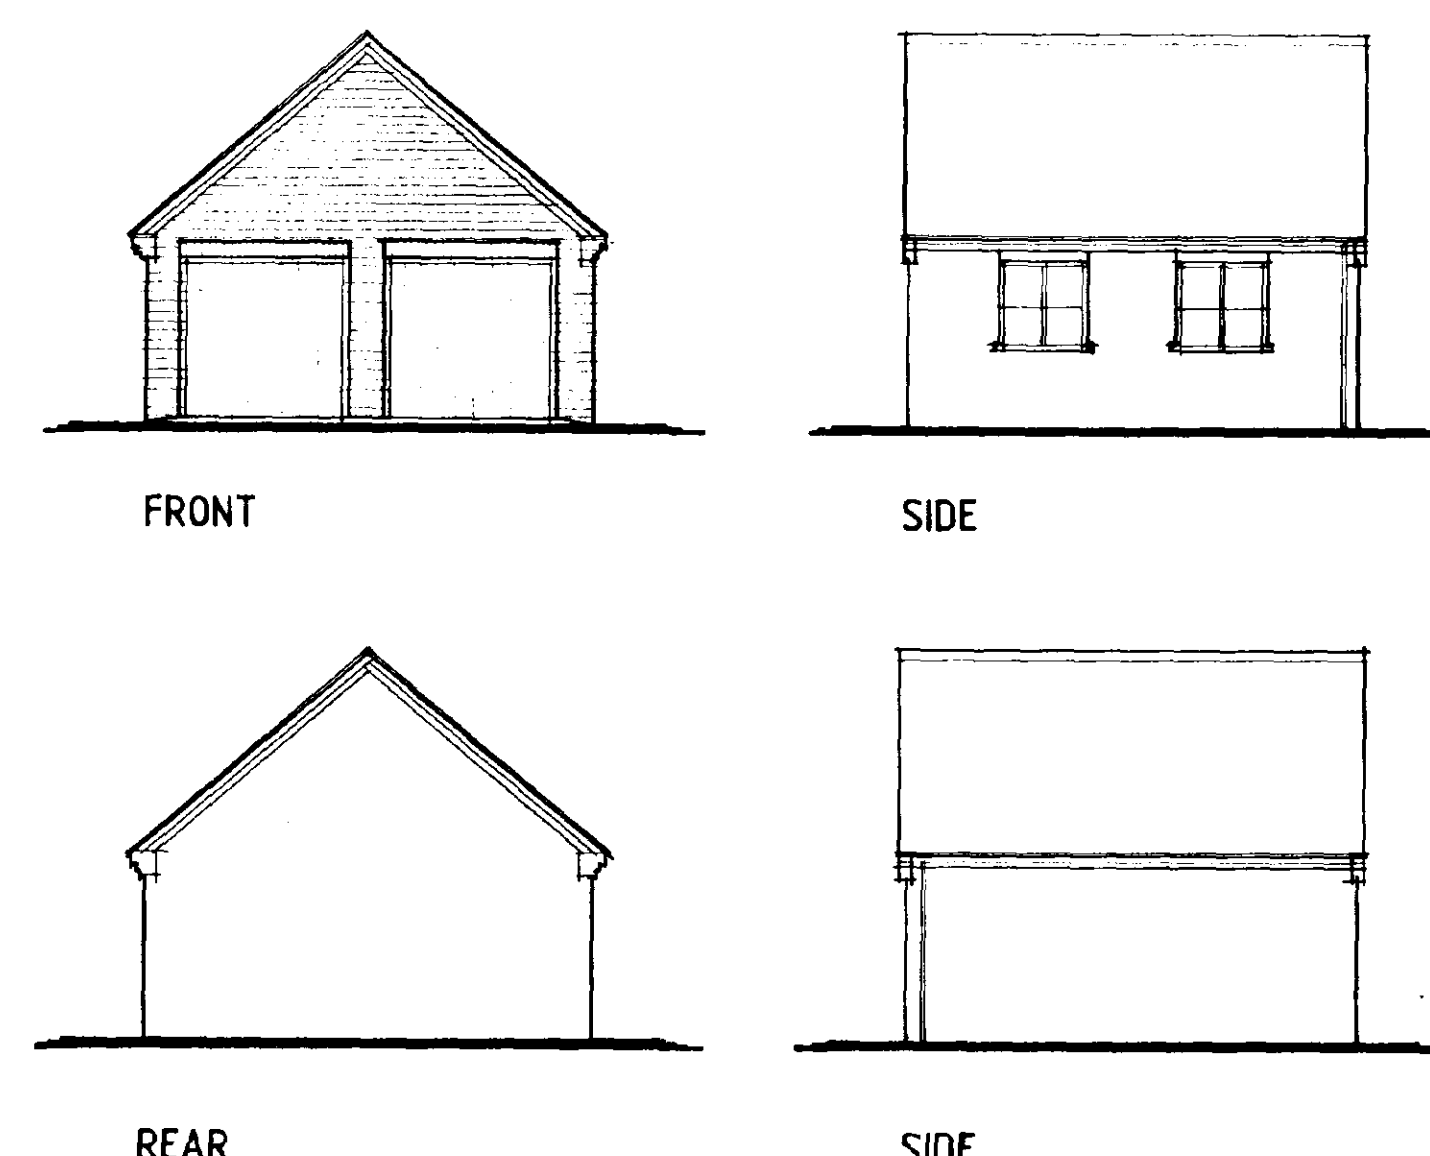

WALL CONSTRUCTION
265mm cavity walls to consist of:-
100mm face brickwork (see site plan for details), 65mm cavity
100mm internal skin of Tarmac Hemelite blockwork. Cavity walls tied together using galvanized iron or plastic twist ties spaced 900mm horizontally and 450mm vertically to BS1243, 1978. Internal blockwork walls to receive 100mm sand/cement render and skim finish.


OVERSAILING GABLED AND CORBELLED EAVES
Provide the above to the design as shown on elevations plus any other details that are shown on the plans.

LINTELS
All coded lintels as stated in Schedule or marked on plan to be by I.G. to be installed in strict accordance with manufacturers instructions. Form d.p.c. cavity tray above all lintels. To all exposed lintels i.e. not sheltered from overhanging eaves, etc. to have proprietary weepholes to joints of brickwork at approx. 450mm c/c.


RAINWATER GOODS
P.V.C. rainwater goods 110 half round gutters and 68mm diameter downpipes.

ROOF CONSTRUCTION
Concrete interlocking roof tiles (see site plan) on 38 x 25 softwood treated timber battens on underfelt to BS747 (Type 1F) lapped 150mm horizontally and 100mm vertically. Prefabricated roof trusses at 600mm c/c and pitch as stated in accordance with BS5268 Part 3, 1985. Provide 25 x 100mm timber bracing and fix in accordance with trusses manufacturers instructions. All trusses and gable ladders (if any) to be strapped to 50 x 100mm timber wallplate, the gable wall at verges and ceiling level with 30 x 5mm mild steel anchor and lateral restraint straps to span minimum 3 no. trusses at a maximum of 1200mm c/c. At strap positions provide pack and noggins to trusses. Main contractor to supply local authority building control with roof truss calculations 28 days prior to erection on site.

GARAGE FLOOR CONSTRUCTION
100mm concrete oversite on 1200 gauge polythene d.p.m. on minimum 150mm, maximum 600mm well blinded and compacted hardcore. If garage is integral to house finished floor level to be 100mm below that of house. Wall d.p.c. to lap floor d.p.m. by a minimum of 50mm.

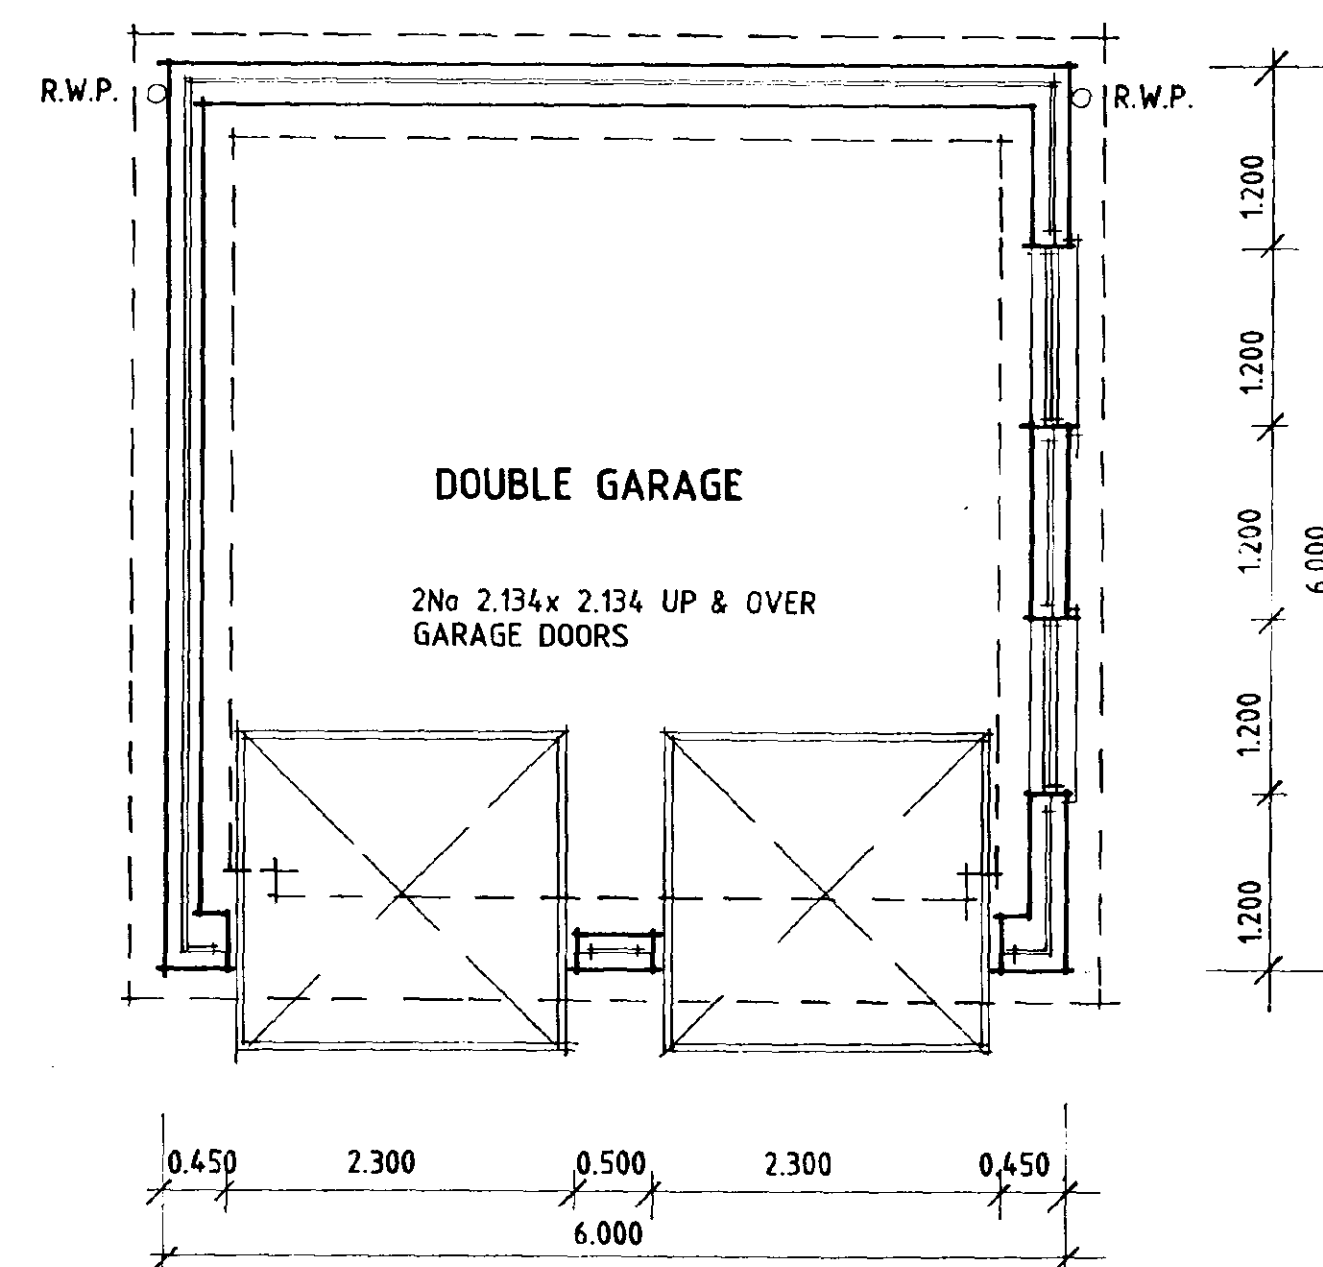

PLAN
G.T.L/D.G/2

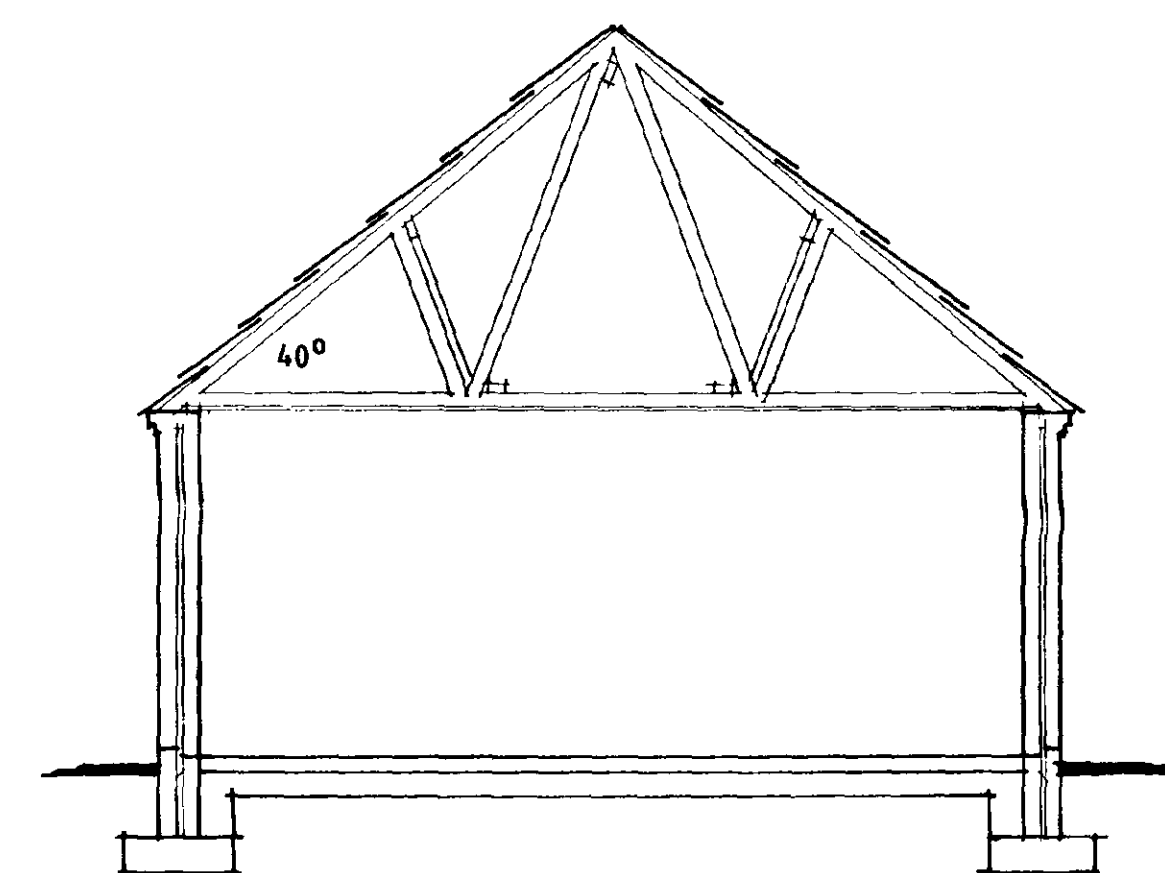

SOUTH HOLLAND DC
HOUSING & PLANNING
18 DEC 1998
Ref: 1251/98

DESIGN **Status**
CONSULTANTS IN ARCHITECTURE & PLANNING


G. T. L. DEVELOPMENTS
LTD.

G.T.L/D.G/1 & G.T.L/D.G/2
GARAGES

1:50 1:100 NOV-96
B.GILHAM.

DETERMINED
PLAN

2 Edinburgh Walk, Holbeach,
Spalding, Lincs. PE12 7AP.
Tel: 01406 424343 Fax: 01406 490702

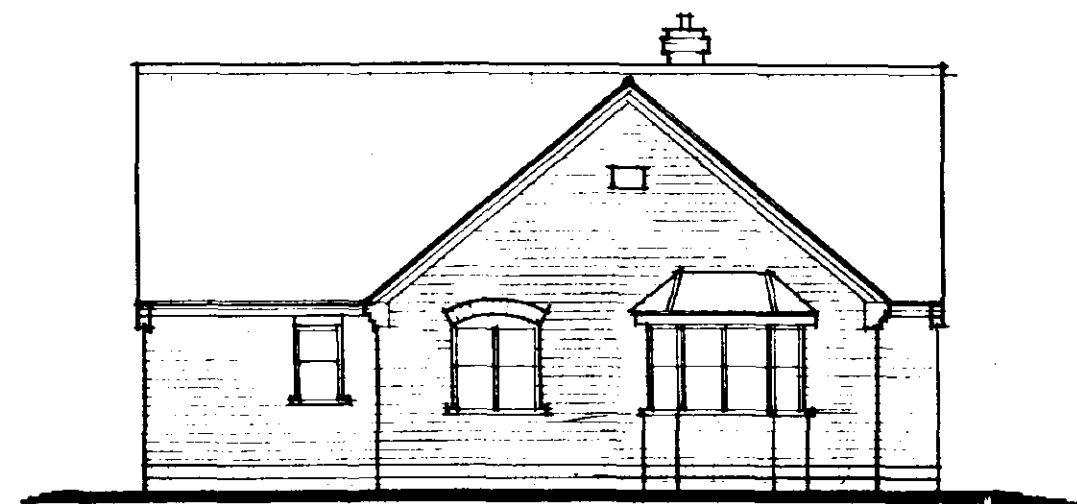

FRONT

NOTES

Brickwork below d.p.c. to be F.L. quality.

Outlets from balanced flue boilers to be at least 300mm from any openings.

Any bends in flues should not be more than 45°.

All soakaways to be minimum 1m deep.

Provide cavity trays above in situ meter boxes.

Provide area for provision of solid waste storage (rubbish bin).

OVERSAILING GABLED AND CORBELLED EAVES

Provide the above to the design as shown on elevations plus any other details that are shown on the plans.

VALLEYS

Use proprietary fibreglass valleys or provide Code 4 lead to valleys to make completely watertight.

REVEALS

Ensure the path through all window and door reveals, including lintels, is limited to a minimum 'U' value of 1.2W/m²K. also at every closure of cavity provide d.p.c.

SIDE

HABITABLE ROOM TRICKLE VENTILATION

Provide proprietary trickle ventilators to head of windows giving a total opening area of not less than 8000mm²

KITCHEN/UTILITY/BATHROOM/WC TRICKLE VENTILATION

Provide proprietary trickle ventilators to head of window giving a total opening area of not less than 4000mm²

UTILITY VENTILATION

Provide proprietary mechanical extract ventilation unit capable of extracting 30lts/second. System to offer intermittent operation.

ROOF CONSTRUCTION

Concrete interlocking roof tiles (see site plan) on 38 x 25 softwood treated timber battens on underfelt to BS747 (Type 1F) lapped 150mm horizontally and 100mm vertically. Prefabricated roof trusses at 600mm c/c and pitch as stated in accordance with BS5268 Part 3, 1985. Provide 25 x 100mm timber bracing and fix in accordance with truss manufacturers instructions. All trusses and gable ladders (if any) to be strapped to 50 x 100mm timber wallplate, the gable wall at verges and ceiling level with 30 x 5mm mild steel anchor and lateral restraint straps to span minimum 3 no. trusses at a maximum of 1200mm c/c. At strap positions provide pack and noggin to trusses. Main contractor to supply local authority building control with roof truss calculations 28 days prior to erection on site.

ROOF VENTILATION

At eaves provide proprietary ventilation equivalent to a 10mm continuous gap along eaves.

ROOF INSULATION

To roof spaces provide proprietary 200mm thick insulation laid as 100mm between joists and 100mm across joists. Ensure a gap of 50mm between roof underfelt and quilt at all times.

ROOF INTERSECTIONS

If compound truss used, where main trusses fix to compound truss provide proprietary truss connectors. Provide 32 x 175mm valley lay boards and fix reducing trusses over to complete roof intersection. Fix in accordance with roof truss manufacturers instructions.

POUL WATER DRAINAGE

Underground drainage to be proprietary 110mm diameter P.V.C. pipes flexible jointed to fall 1:70 bedded in 100mm pea gravel. Under building drains to be encased in 150mm pea gravel with lintel over pipes at wall abutments. Surround pipes at wall abutments with 50mm compressible material. 110mm diameter soil and vent pipe to extend 900mm above window head and to terminate in balloon finial. Soil and vent pipe to be fitted with access plate at base. Provide suitably sized wastes from all appliances (in accordance with Approved Document H) complete with minimum 75mm deep sealed traps and rodding eye access points at every direction change. All above ground drainage to BS5582 and all underground drainage to BS8301.

SURFACE WATER DRAINAGE

To be proprietary 110mm diameter P.V.C. pipes flexible jointed to fall 1:70 bedded in 100mm pea gravel. Pipes to discharge into 1200mm diameter soakaways sited 5000mm away from buildings.

PROTECTION TO UNDERGROUND PIPES

Where pipes are not under road and have less than 600mm cover concrete paving slabs should be laid as bridging above the pipes on minimum 75 pea gravel. If flexible pipes are under a road and have less than 900mm cover reinforced concrete bridging should be used instead of paving slabs.

INSPECTION CHAMBER CONSTRUCTION

Proprietary polypropylene inspection chambers bedded on 150mm concrete. Form protective 255mm thick concrete collar around head of inspection chamber with 300mm projection from cover. Covers to be Grade C light duty unless inspection chambers are in driveways where Grade B medium duty covers are to be used.

OPEN FIRE

To be capable of burning smokeless fuel. Hearth to be 125mm high above finished floor level. Flue liners to BS1181 1971 (sockets up). Build into brick jambs of open fire 2 no. metal anchorage points.

REAR

KITCHEN VENTILATION

Provide proprietary mechanical extract ventilation unit capable of extracting 60lts/second. Alternatively provide proprietary cooker hood capable of extracting 30lts/second.

BATHROOM VENTILATION

Provide proprietary mechanical extract ventilation unit capable of extracting 15lts/second. System to offer intermittent operation.

HOT WATER STORAGE

Provide system approved by BBA and install by BBA approved installer. System to be vented and insulated in accordance with BS5615 1985. Provide thermostatic control.

HEATING SYSTEM

Provide room thermostat or thermostatic radiator valve or similar approved to control the output from the heating system.

INSULATED PIPES AND DUCTS

All pipes which do not contribute to the heating of the building will be insulated to BS5422 1977.

SAFETY GLAZING

Provide safety glass to BS6206 to all windows to a minimum height of 800mm above floor level plus doors to a minimum height of 1500mm above floor level. Side screens to be same as doors if within 300mm of doors.

SMOKE DETECTION

Provide mains operated self-contained smoke alarms to BS5446 Part 1 in accordance with Approved Document B1

RAINWATER GOODS

P.V.C. rainwater goods 110 half round gutters and 68mm diameter downpipes.

SUBSTRUCTURE WALLING

100mm Class A dense concrete blocks. Butumen felt d.p.c. to external walls 150mm above ground level. Weak mix infill to base of cavities to terminate 225mm below lowest d.p.c. level.

FOUNDATIONS

As indicated on plan provide concrete strip foundations. To cavity walls provide 700mm wide x 225mm thick and to 100mm walls provide 450mm wide x 225mm thick, unless noted otherwise. To non-loadbearing internal walls thicken out ground floor oversite concrete to 450mm wide x 200mm thick. Widen foundations at chimney breast accordingly and make 300mm thick. Foundations to taken down to an approved firm base, subject to local authority specifications. Concrete to be ST3 grade unless noted otherwise.

IG. TYPE L1/S LINTELS TO OPENINGS IN CAVITY WALLS & IG. INT. LINTELS TO INT. OPENINGS UNLESS SPECIFIED OTHERWISE

WINDOWS TO BE UPVC DOUBLE GLAZED. ENSURE EACH ROOM HAS 1/20 FLOOR AREA AS VENTILATION

SIDE

FLUE CONSTRUCTION

Provide 225mm diameter clay flue liners to BS1181 1971 with minimum 100mm brick surround. Flue to extend past ridge as stated in Approved Document J1/2/3 Part B and to terminate in 75mm concrete capping and clay pot. Provide Code 4 lead flashing to roof intersection. Provide 2 no. courses of engineering brick or similar as d.p.c. No timber to be within 40mm of chimney. Chimney also to be read in conjunction with Approved Document A1/2 Section 1D.

COMBUSTION AIR

Provide proprietary ventilator to room of open fire at low level to outside air (ideally opposite open fire) to give combustion air equivalent to 50% the cross sectional area of the throat opening on the appliance. Alternatively provide proprietary underground ducting from appliance to outside air to give above.

METER BOXES

Position gas and electricity meter boxes if required in external position to suit client. To be completely sealed around in non-combustible material. To be minimum 500mm, maximum 1000mm above footpath to base.

LINTELS

All coded lintels as stated in Schedule or marked on plan to be by 1-9. To be installed in strict accordance with manufacturers instructions. Form d.p.c. cavity tray above all lintels. To all exposed lintels i.e. not sheltered from overhanging eaves, etc. to have proprietary weepholes to joints of brickwork at approx. 450mm c/c.

GROUND FLOOR CONSTRUCTION

65mm sand/cement screed on proprietary 50 mm thick floor insulation with perimeter insulation to screed on 1200 gauge polythene d.p.m. on 100mm concrete oversite on minimum 150mm, maximum 600mm well blinded and compacted hardcore. Wall d.p.c. to lap floor d.p.m. by a minimum of 50mm.

BOILER

Provide balanced flue type gas boiler of required rating in to be either a wall hung type or freestanding on 125mm high concrete hearth above oversite. Boiler outlet to have protective guard cover and to be a minimum 300mm from any opening into the building which is wholly or partially above the terminal. Read in conjunction with Approved Document J1/2/3.

WALL CONSTRUCTION


275mm cavity walls to consist of:- 100mm face brickwork (see site plan for details), 75mm cavity to be filled with Crown Dritherm full fill insulation in accordance with BBA Certificate No. 86/1678 or similar approved, 100mm internal skin of Tarmac Hemelite blockwork. Cavity walls tied together using galvanized iron or plastic twist ties spaced 900mm horizontally and 450mm vertically to BS1243, 1978. Internal blockwork walls to receive 10mm sand/cement render and skim finish.

HEADER TANK SUPPORT

Water tank in roof space to be supported on bearers to spread the load to BS5268 Part 3 1985.

CEILINGS

To all insulated roof ceilings provide 12.5mm Gyproc Duplex plasterboard or similar and either 5mm skim or Artex finish. To remaining ceilings provide 12.5mm Gyproc plasterboard or similar with finishes as above.

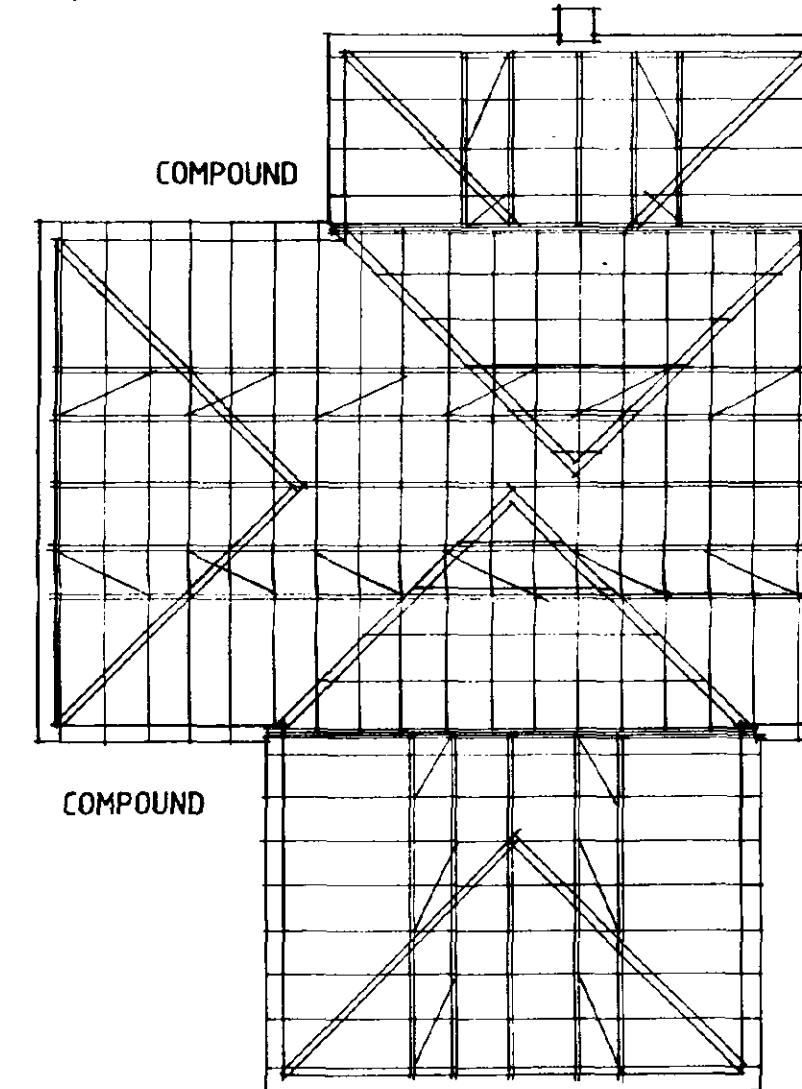

ROOF PLAN
SOUTH HOLLAND DC
HOUSING & PLANNING
18 DEC 1998
12.51/98


DESIGN **Status**
CONSULTANTS IN ARCHITECTURE & PLANNING

G. T. L. DEVELOPMENTS
LTD.

CONISTON

1:50 1:100 NOV-96

B.GILHAM.

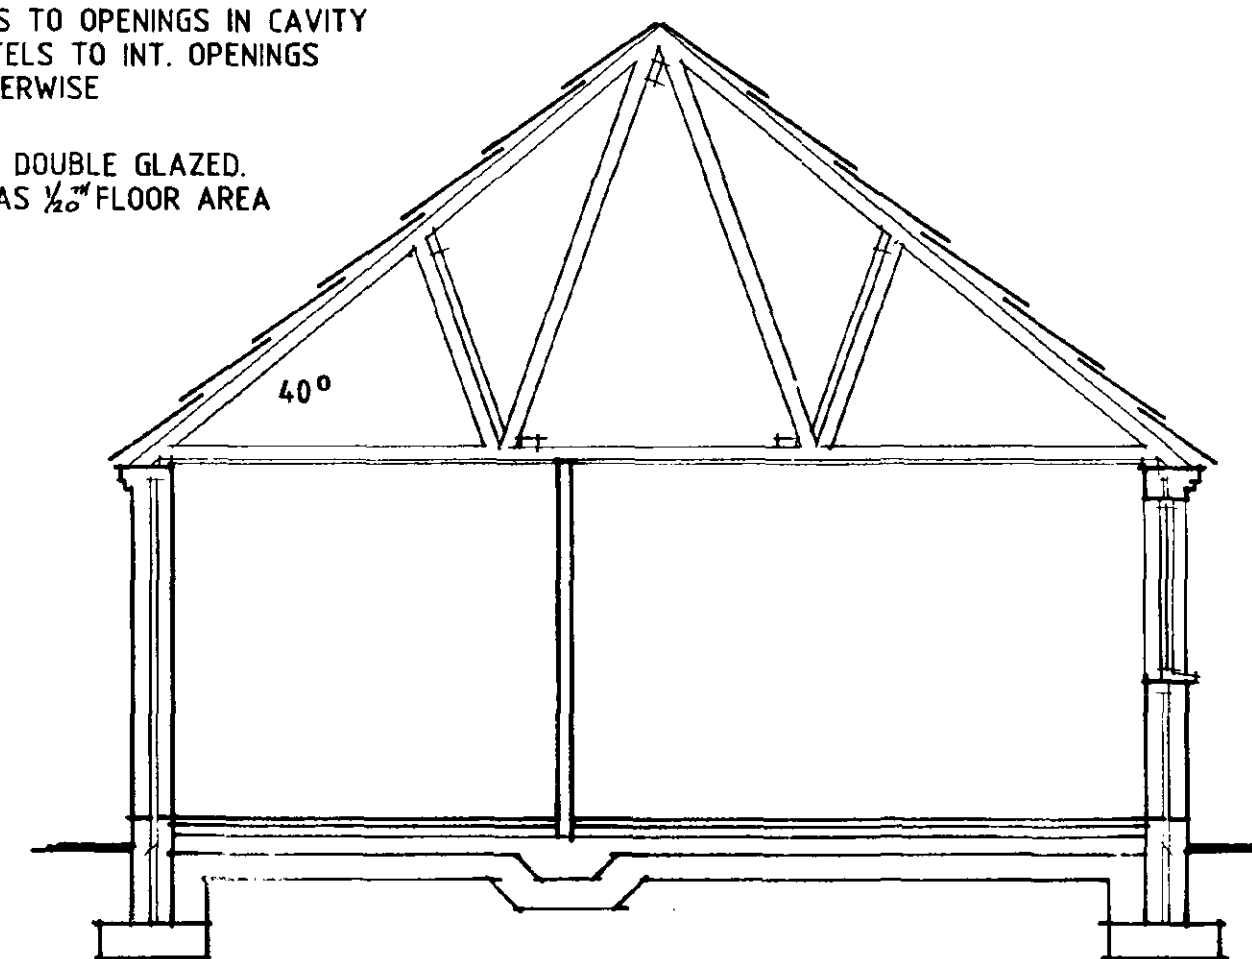


SECTION

DETERMINED
PLAN


B - ALTS FOR B.R - 21.1.97
A - B.R. ADDITIONS - 10.12.96

2 Edinburgh Walk, Holbeach,
Spalding, Lincs. PE12 7AP.
Tel: 01406 424343 Fax: 01406 490702

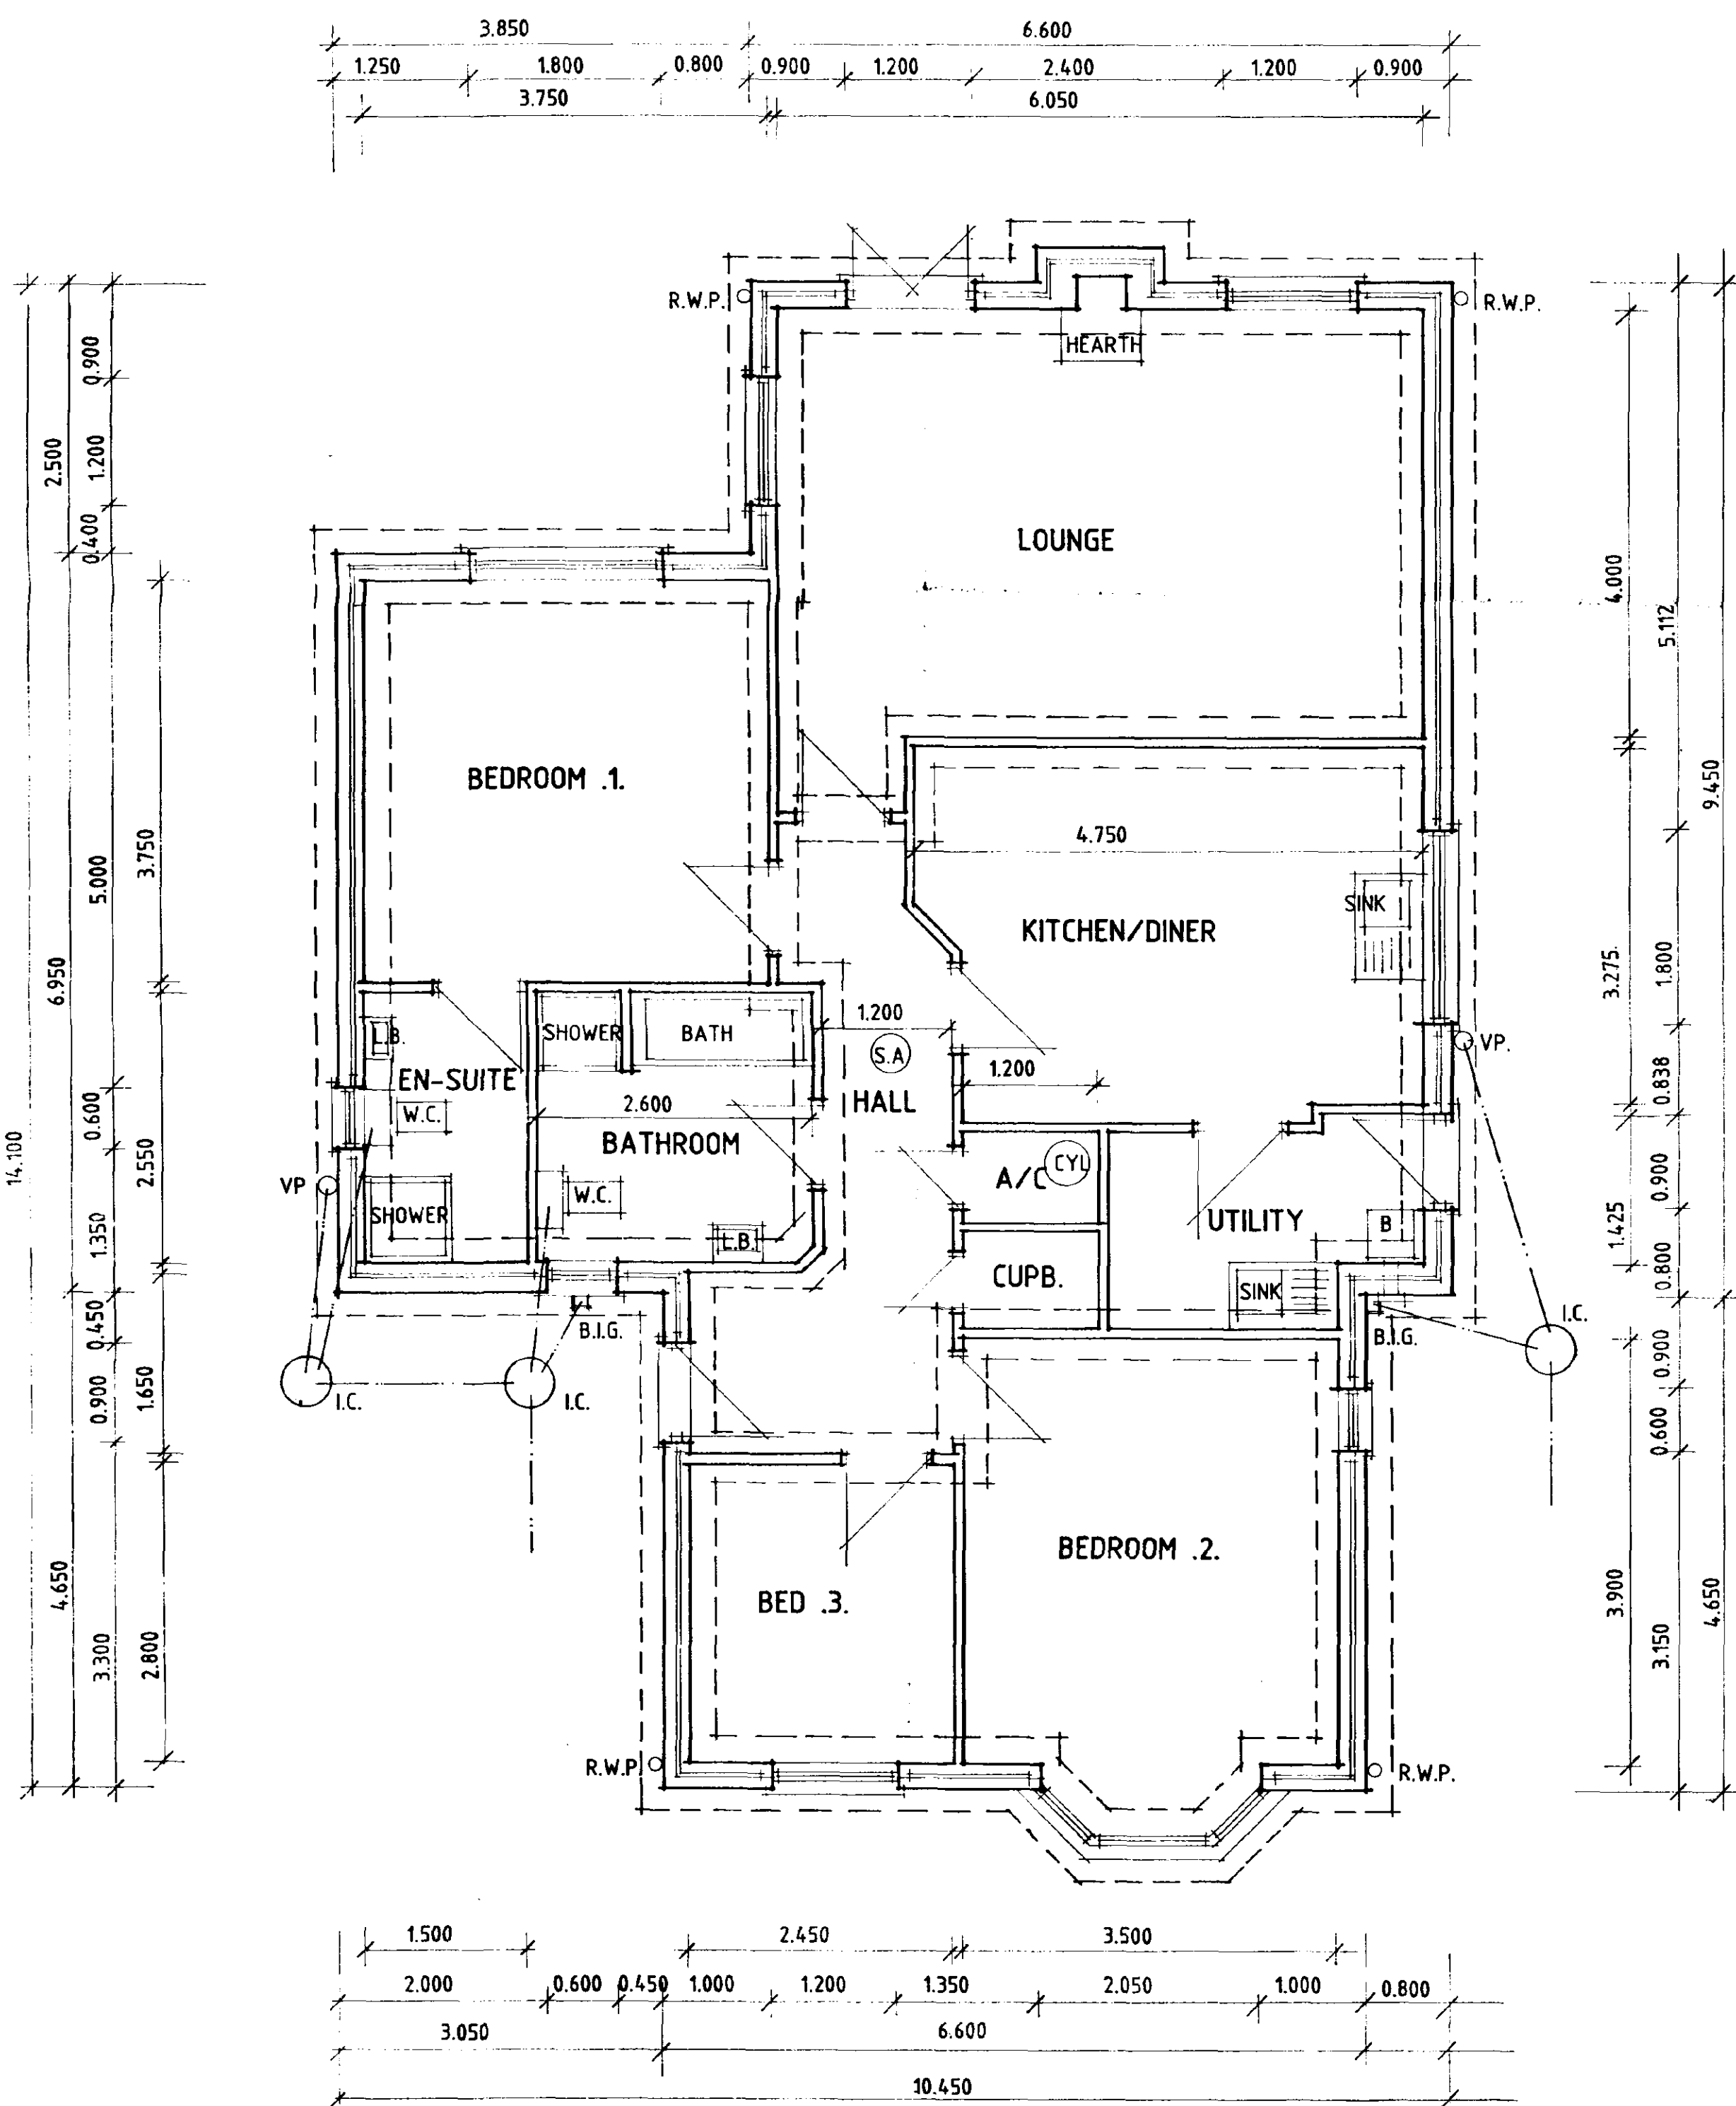







0.700 1.200 0.200 1.125 1.800 1.050 1.800 1.125 0.760 1.200 1.040

14.600 5.900 4.600 4.000 4.150 4.150 3.600 0.325 0.900 1.400 4.550 3.325 2.950

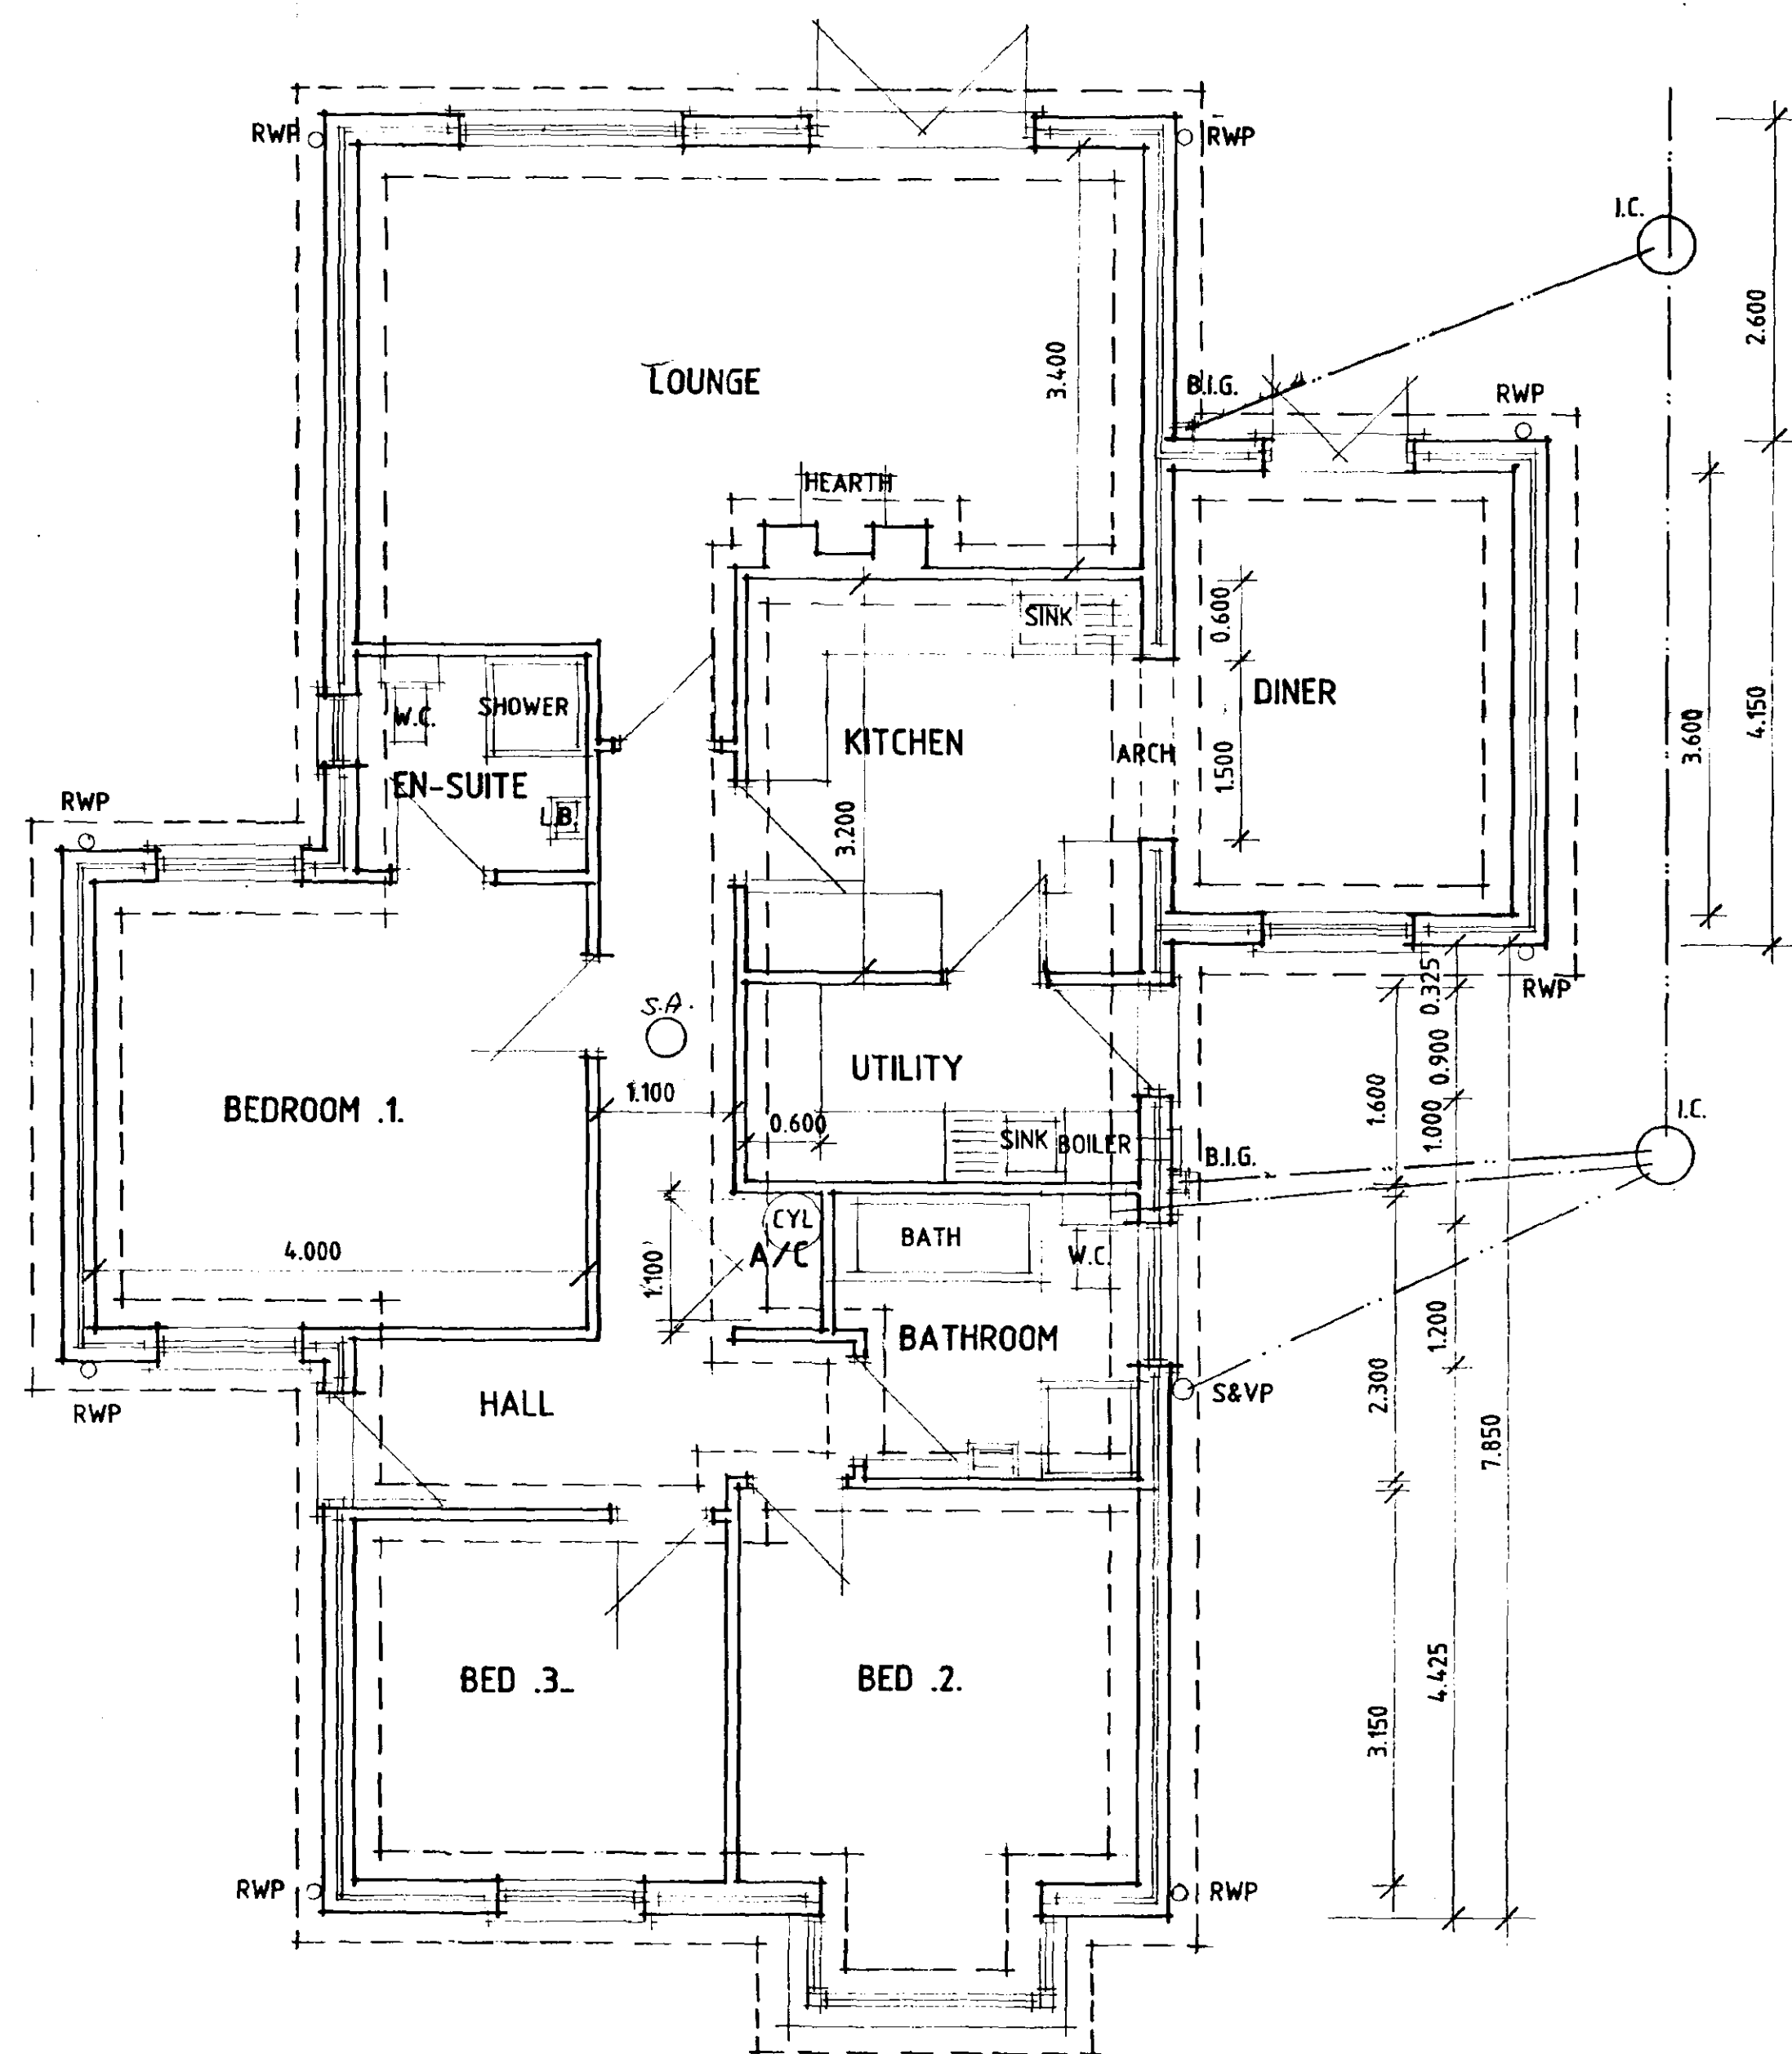

0.700 1.200 0.200 1.125 3.000 1.200 1.650 3.250 1.800 1.125 0.760 1.200 1.040 2.100 6.900 12.000 3.000

FLOOR PLAN

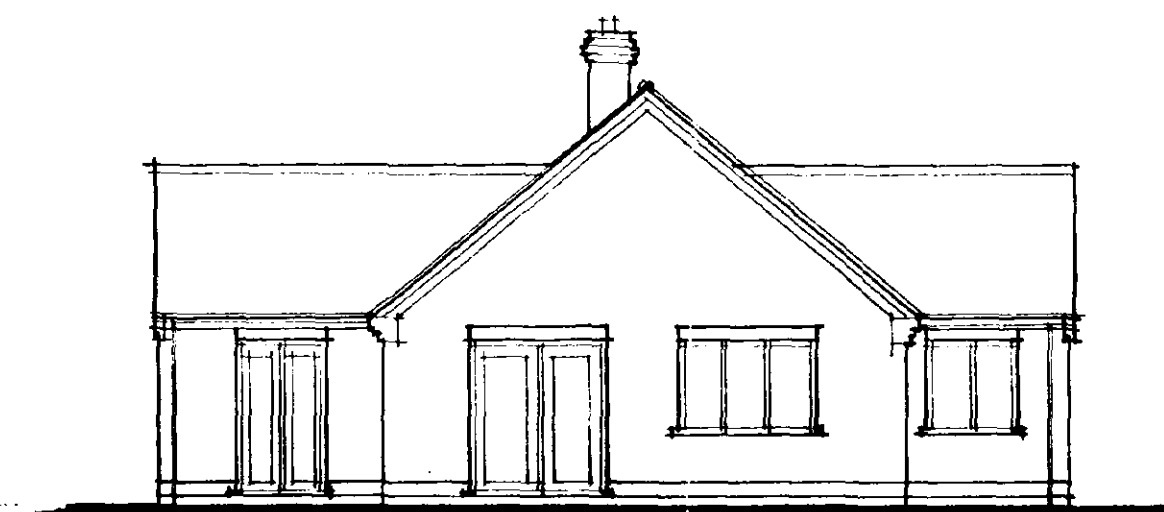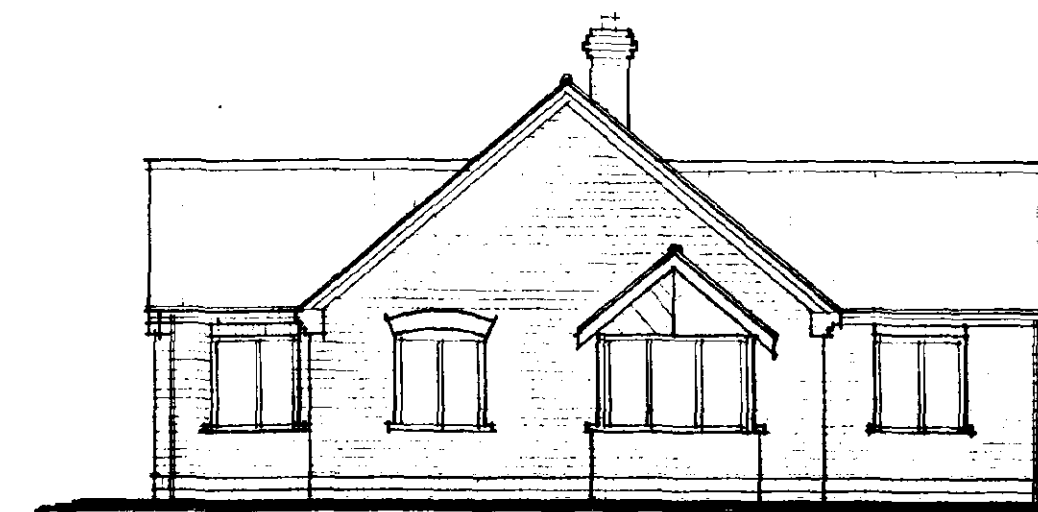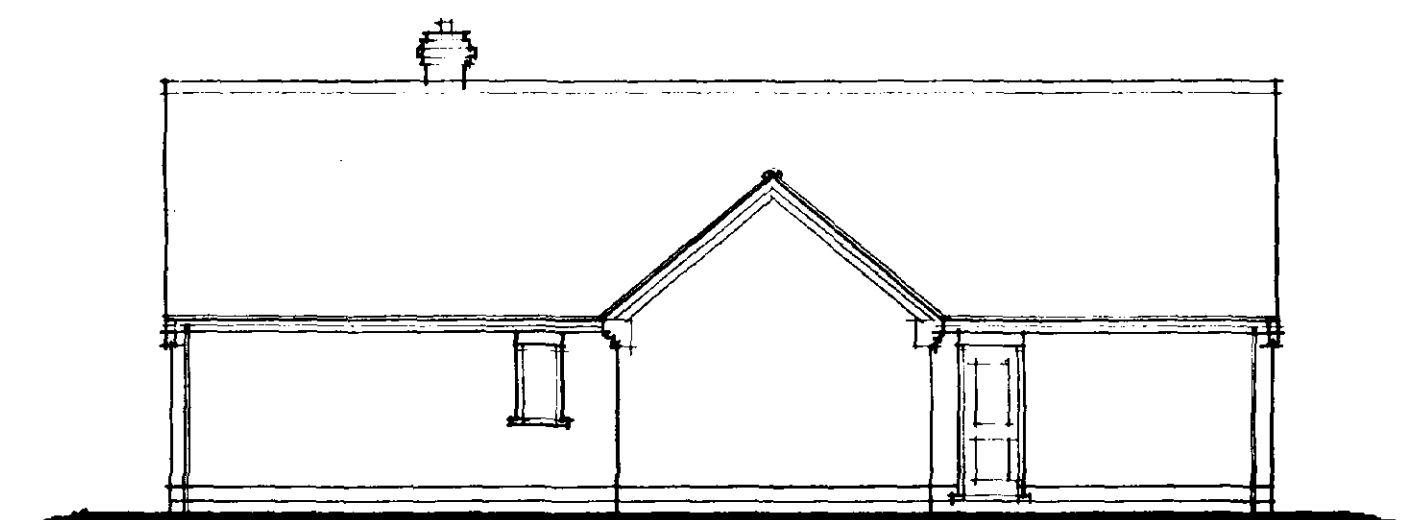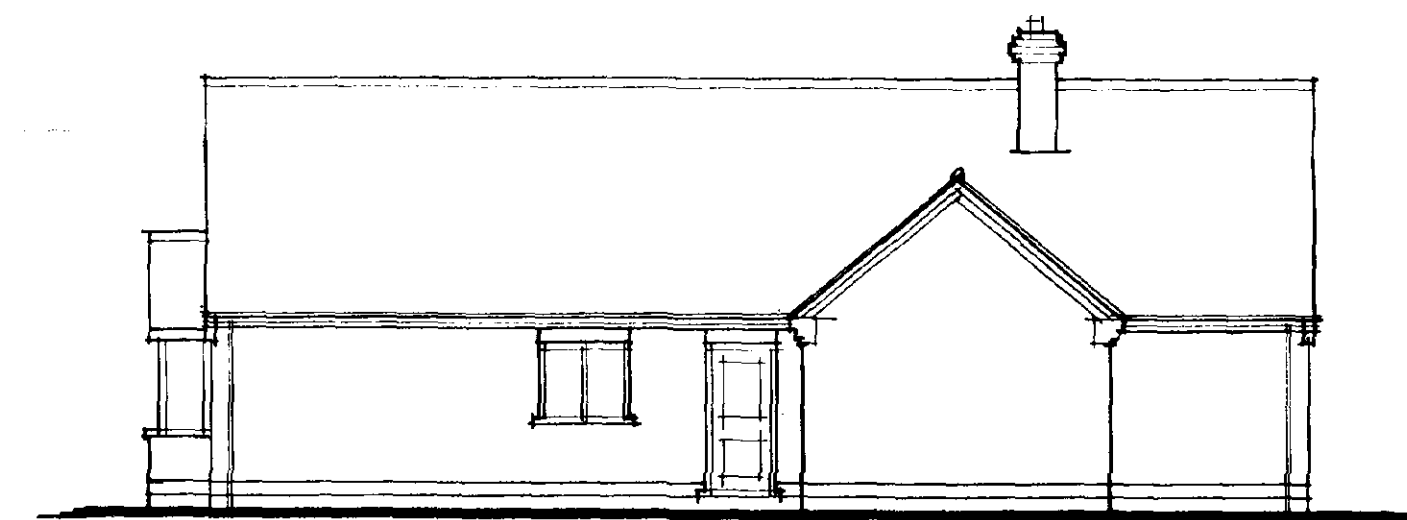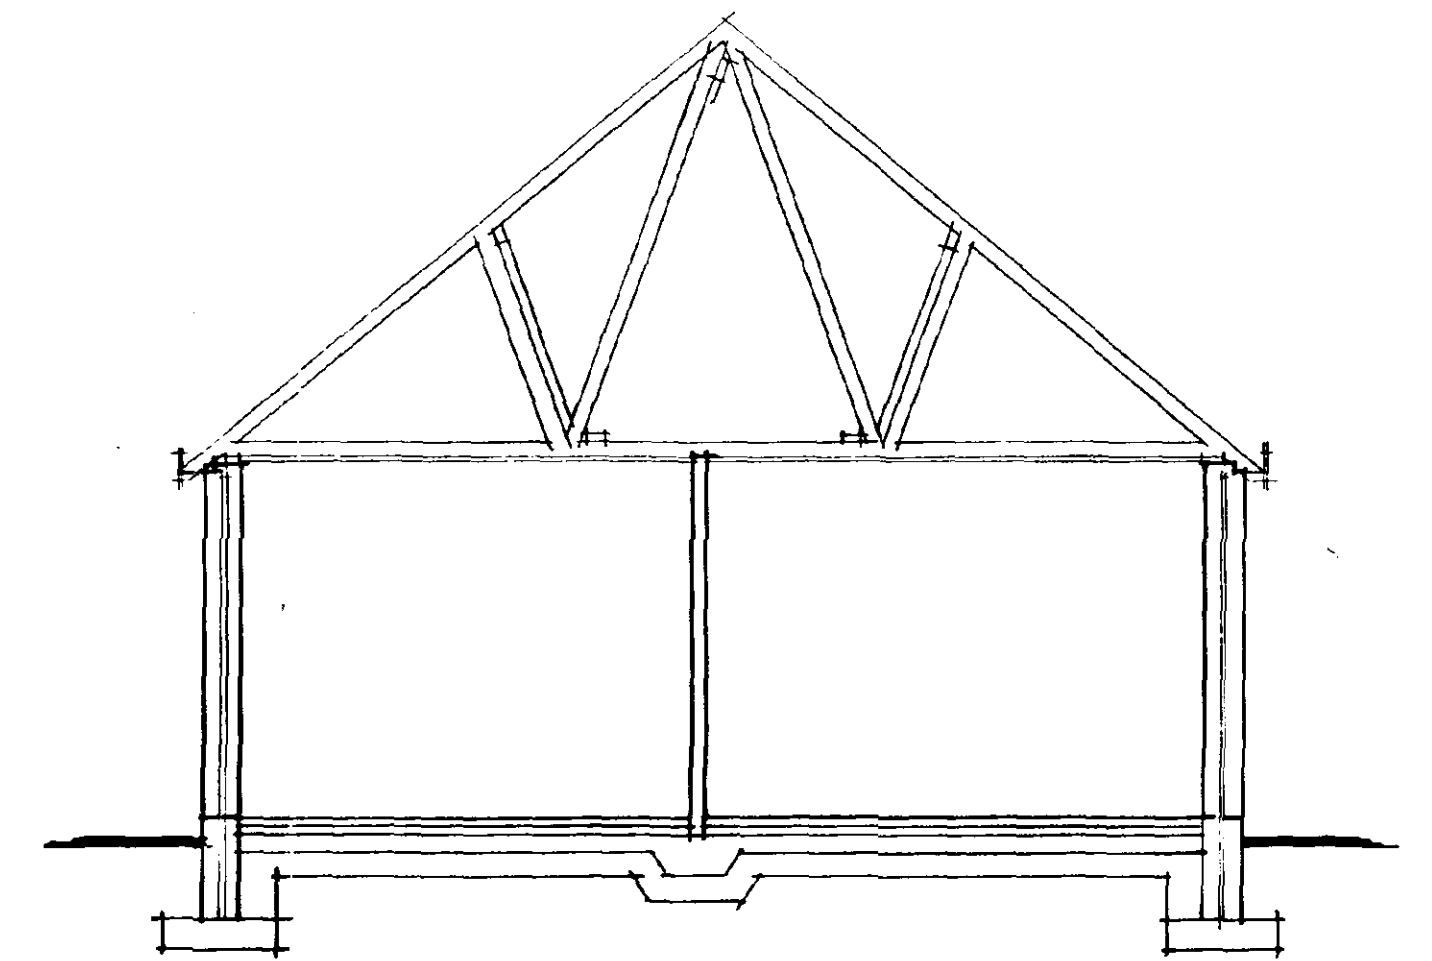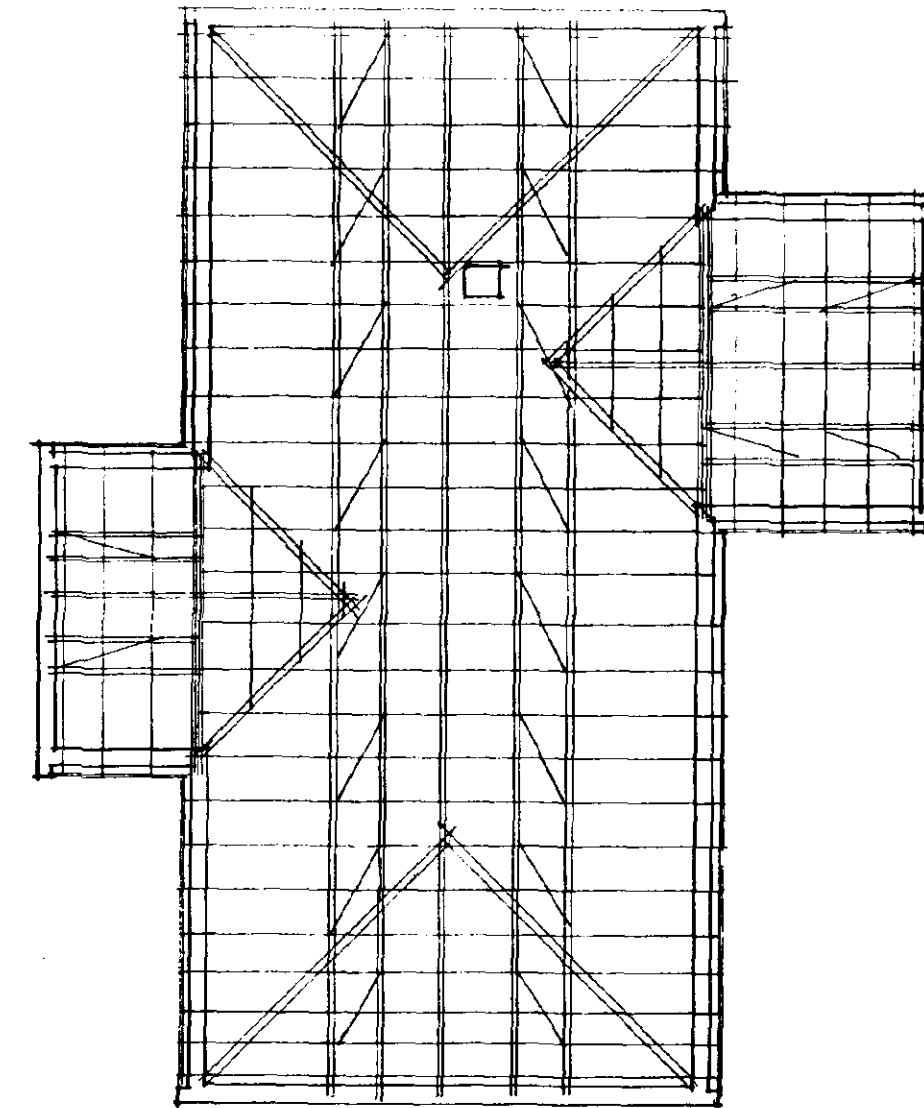

FRONT

THIS DRG. TO BE READ IN CONJUNCTION WITH
TECHNICAL INFORMATION - 771987

SOUTH HOLLAND DC
HOUSING & PLANNING
18 DEC 1998
Ref: 1251/98

A - SMOKE DETECTOR - 3-8-98

DESIGN **Status**
CONSULTANTS IN ARCHITECTURE & PLANNING

G. T. L. DEVELOPMENTS
LTD.


DERWENT

1:50 1:100 MARCH-98




B.GILHAM

DETERMINED
PLAN

2 Edinburgh Walk, Holbeach,
Spalding, Lincs. PE12 7AP.
Tel: 01406 424363 Fax: 01406 490702

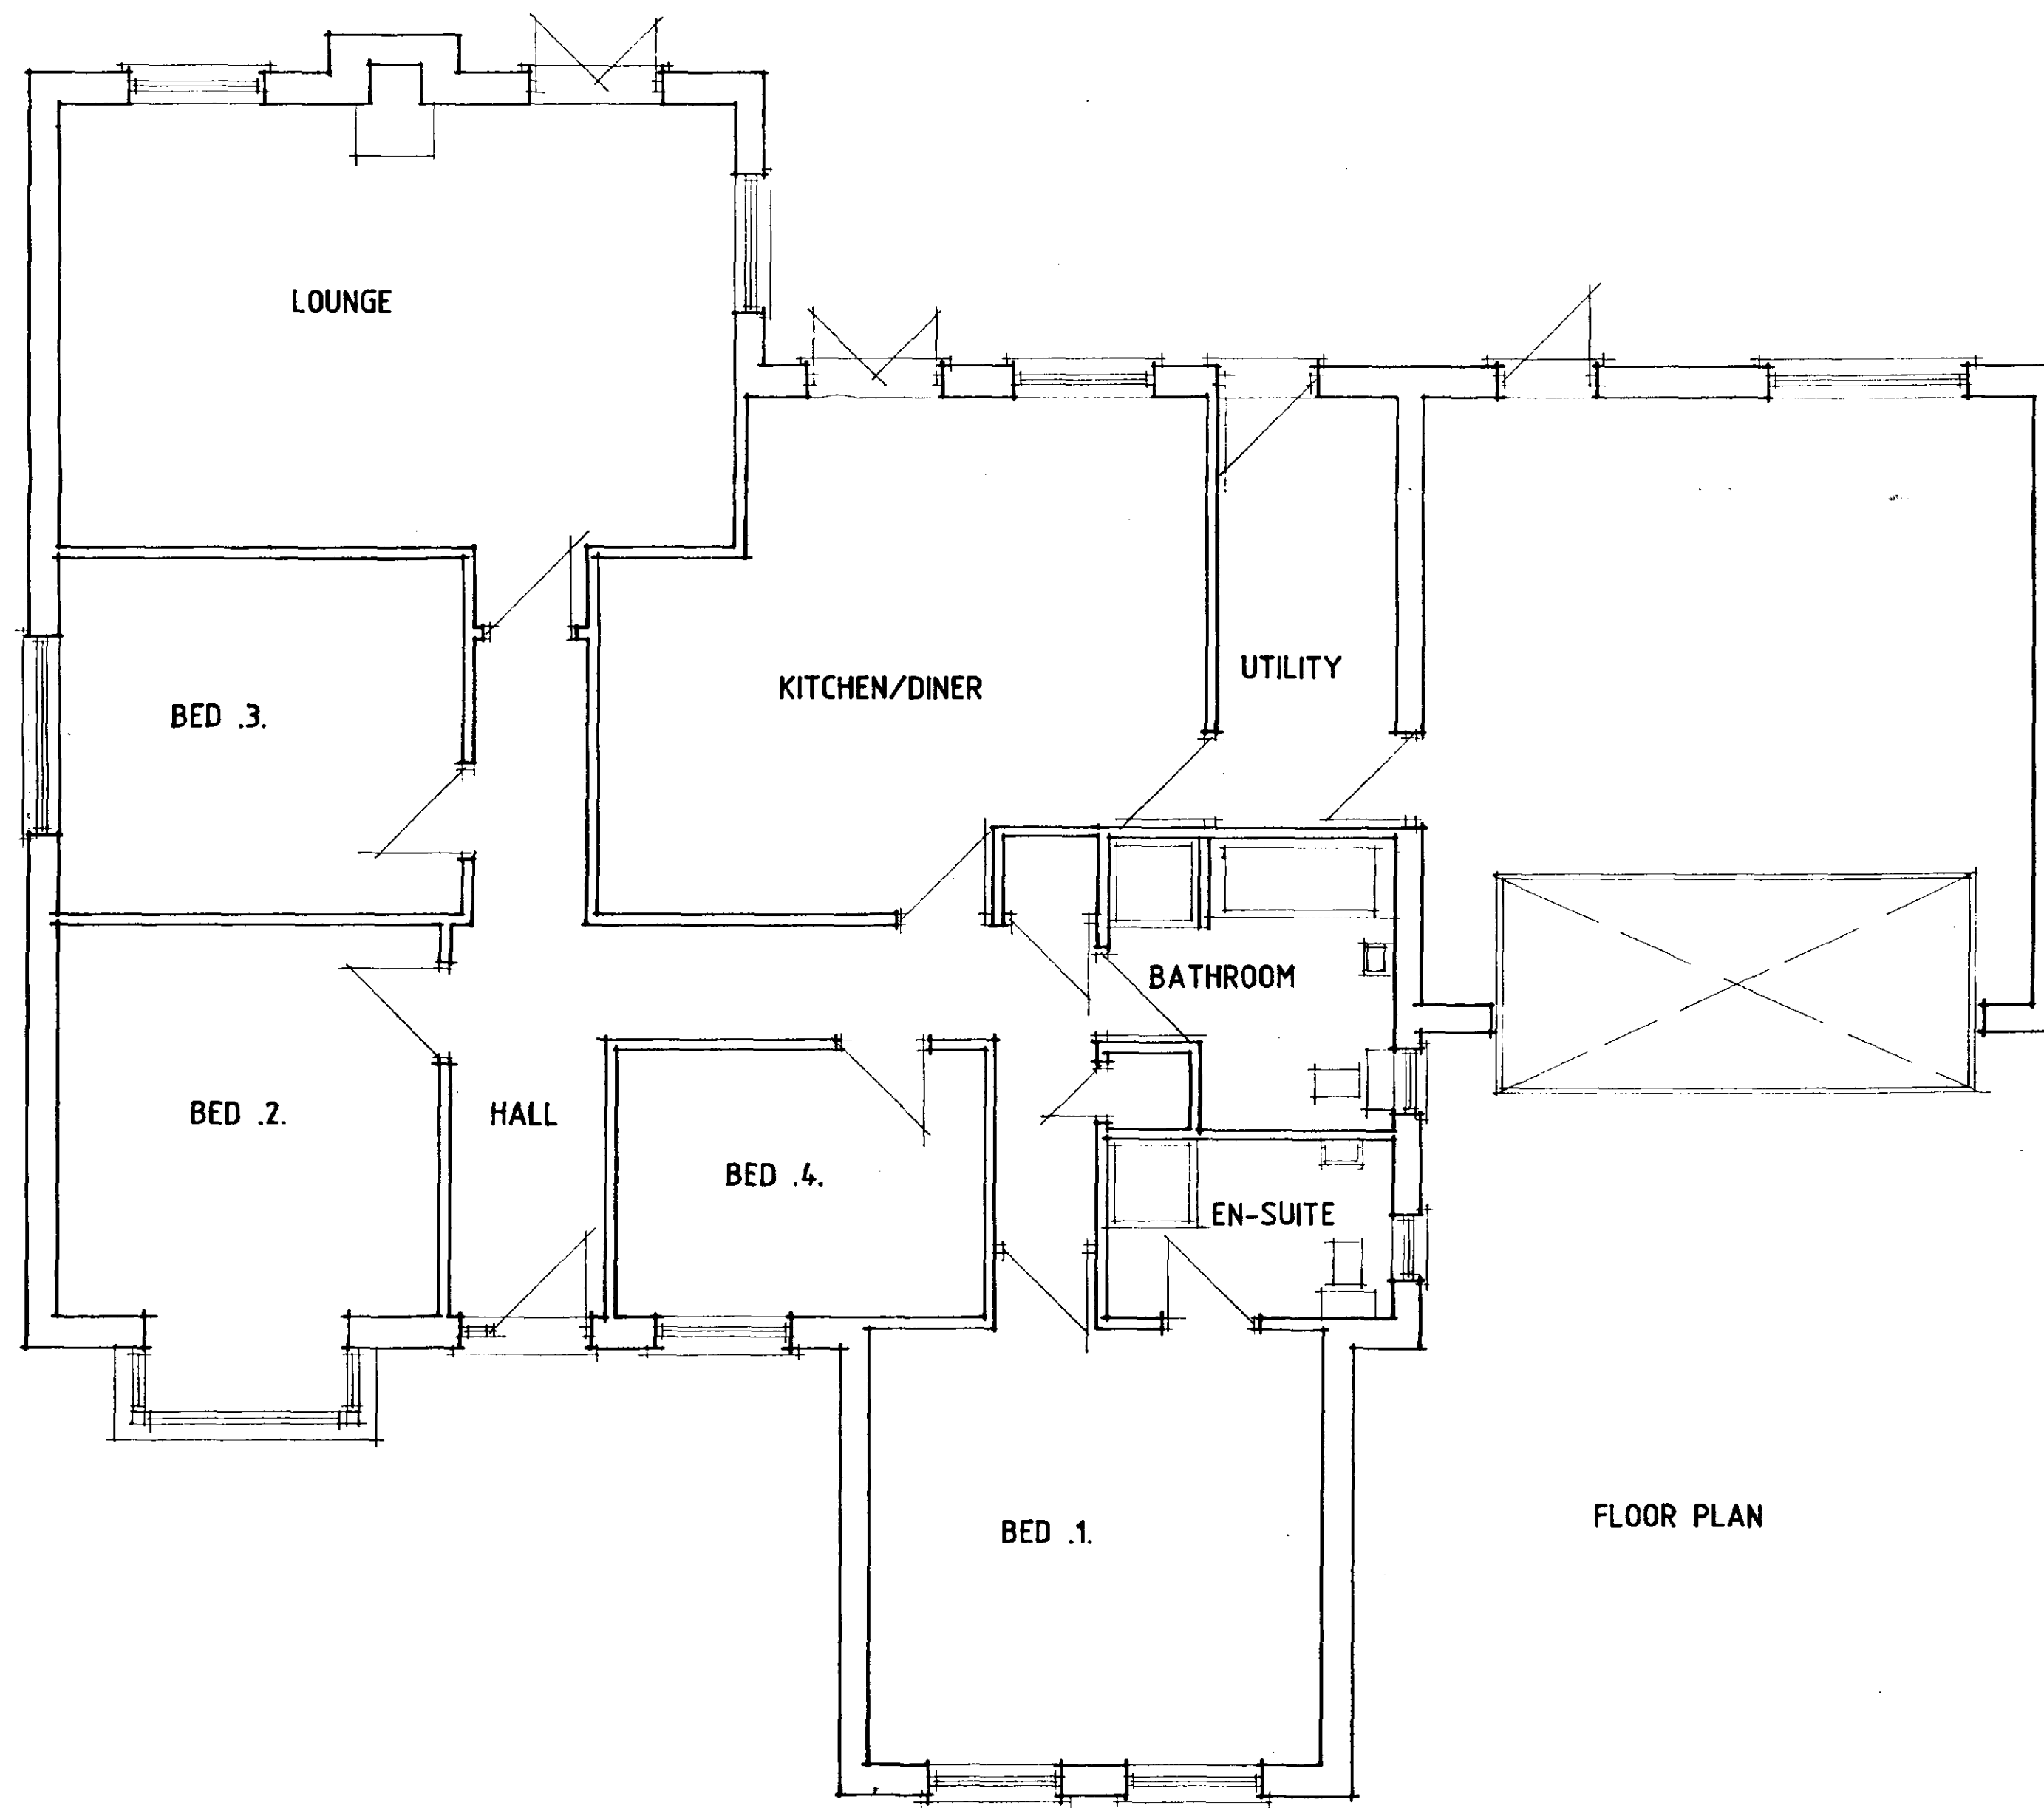

FLOOR PLAN

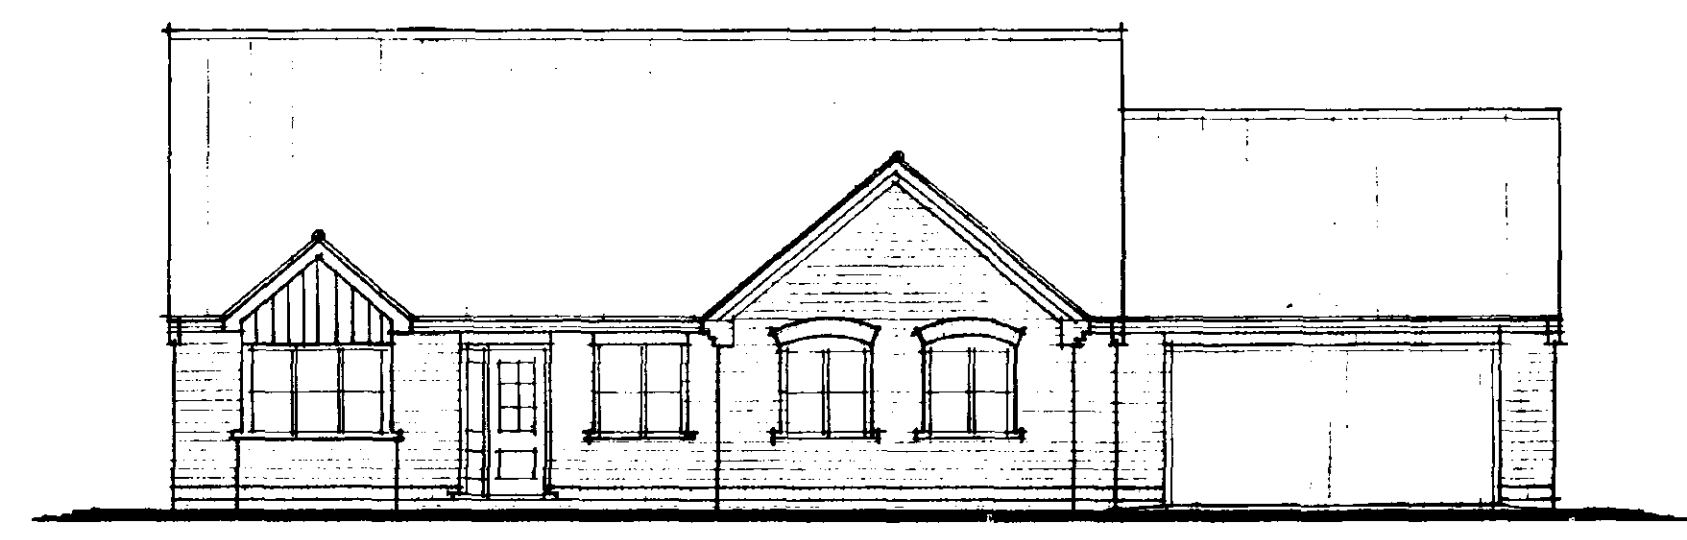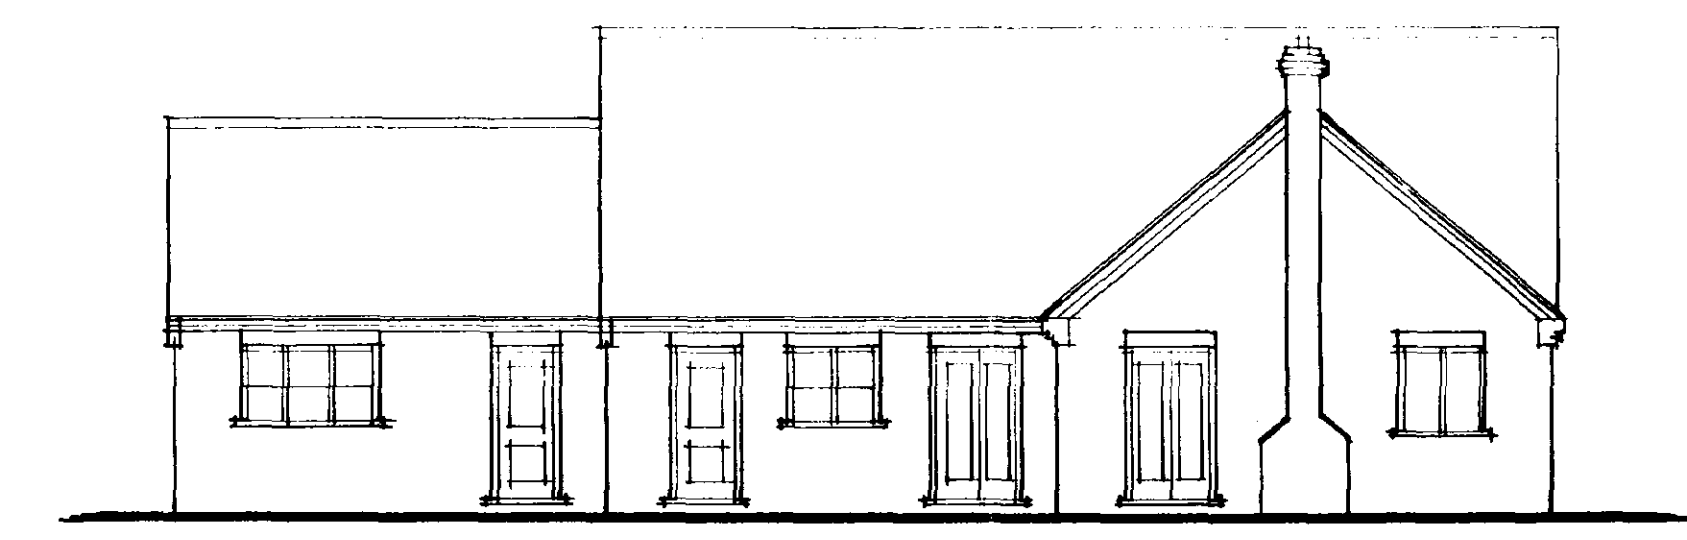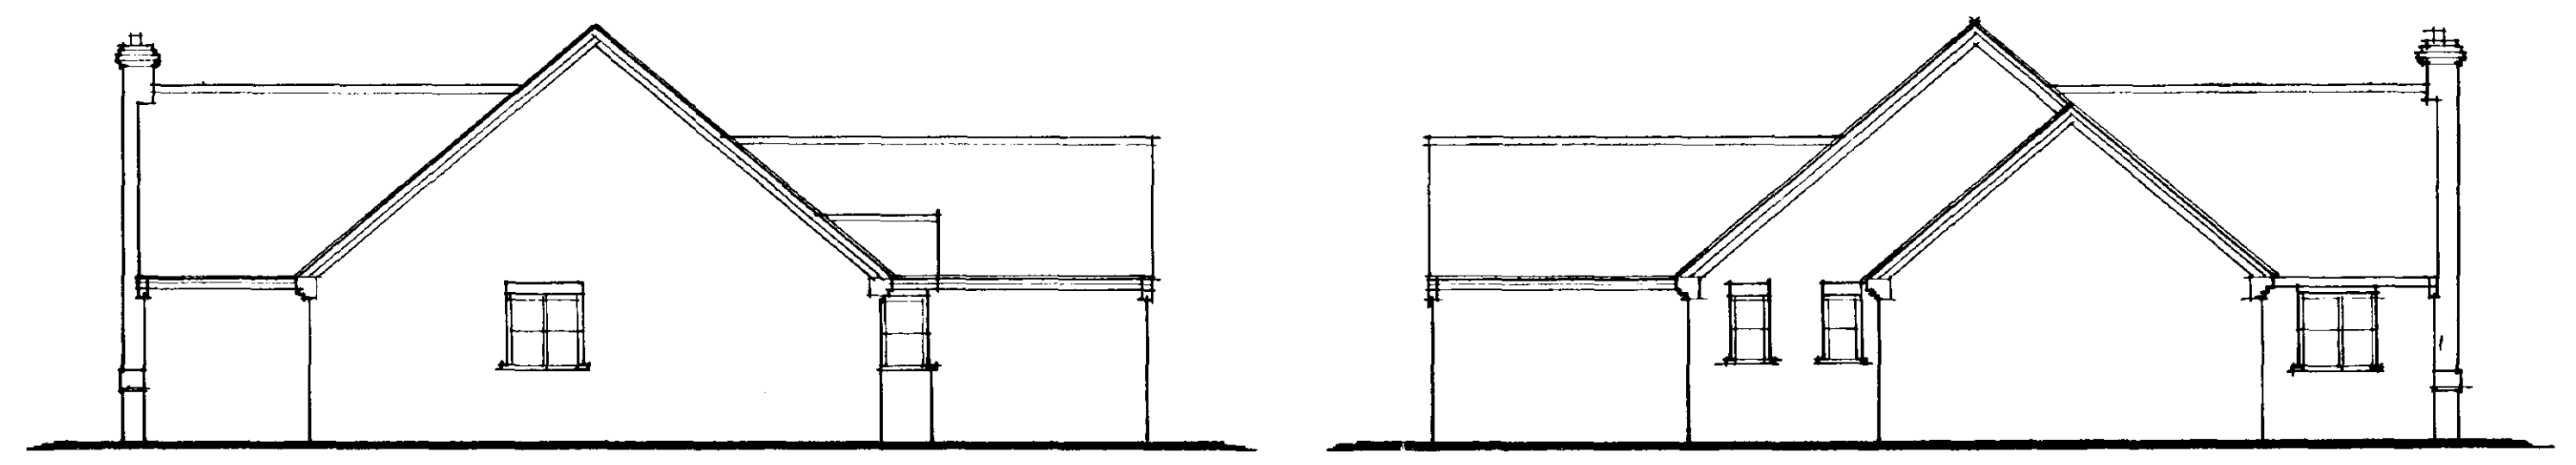

SOUTH HOLLAND DC
HOUSING & PLANNING
18 DEC 1998
Ref: 1251/98

DESIGN Status
CONSULTANTS IN ARCHITECTURE & PLANNING

G. T. L. DEVELOPMENTS LTD.


LANGDALE



1:50 1:100 | NOV-98

B.GILHAM.

DETERMINED
PLAN

2 Edinburgh Walk, Holbeach,
Spalding, Lincs. PE12 7AP.
Tel: 01406 424343 Fax: 01406 490702



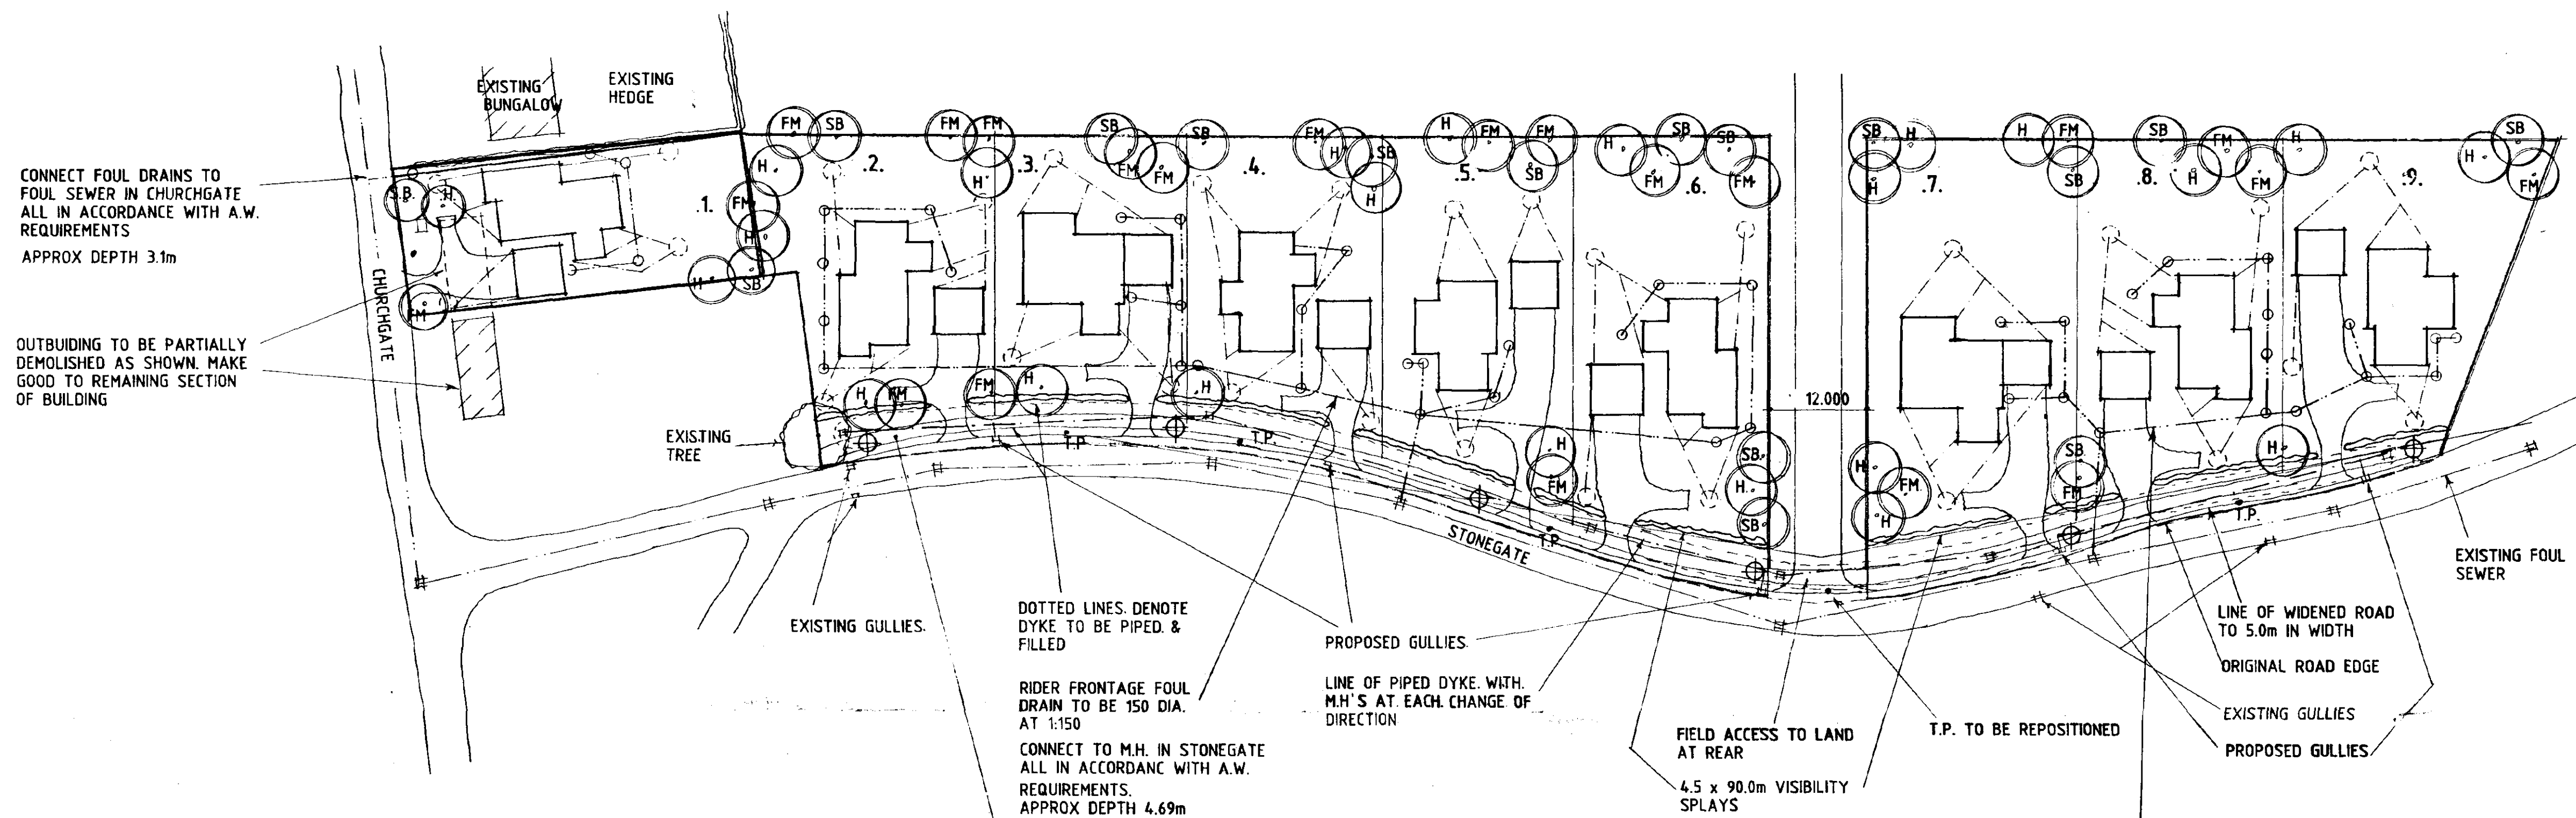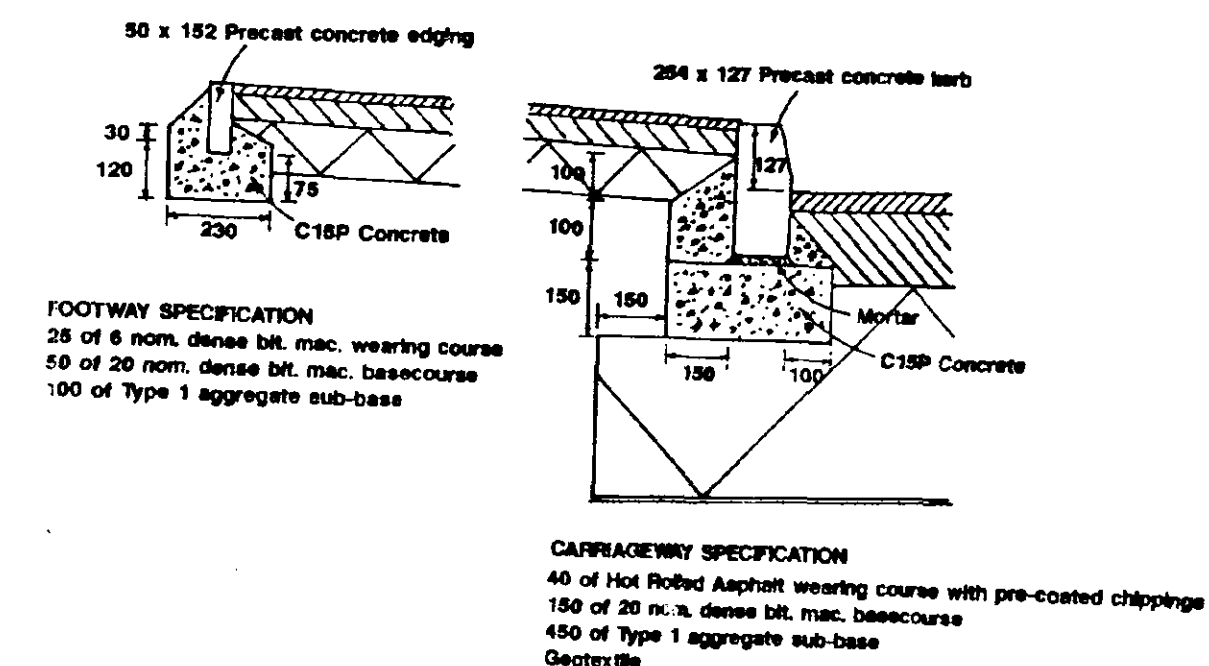

- DWELLINGS**
- PLOT 1 - ULLSWATER
 - PLOT 2 - ULLSWATER
 - PLOT 3 - LANGDALE
 - PLOT 4 - DERWENT
 - PLOT 5 - CONISTON
 - PLOT 6 - ULLSWATER - HANDED
 - PLOT 7 - LANGDALE
 - PLOT 8 - ULLSWATER - HANDED
 - PLOT 9 - CONISTON - HANDED

- GARAGES**
- G.T.L./D.G./1 TO PLOTS 6 & 9
 - G.T.L./D.G./2 TO PLOTS 1,2,4,5 & 8

Notes & Revisions

Do not scale from this drawing.

This drawing is copyright and may not be altered, traced, copied, photographed or used for any purpose other than that for which it is issued without written permission from Messrs. Status Design.

The General Contractor is to check all dimensions on site and report discrepancies to the Architect.

All details shown on this drawing are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions unless reported to the Architects so that design amendments may be considered.

Please note: This drawing is not a conveyance drawing.

Construction work to be carried out with due regard to the Construction (Design and Management) Regulations 1994 (CDM) and the Health and Safety at Work, etc. Act 1974 (HSW Act).

Drives
Washed gravel on 100mm consolidated hardcore. Concrete edging kerbs.

Turnings
Provide turning bays from garages as shown all to local authority requirements.

Accesses
Accesses to be minimum 2.5m wide and constructed all in accordance with Lincolnshire County Council requirements.

Dyke
Dyke to site frontage to be piped with solid concrete pipe 450mm diameter and to be connected to existing 600mm diameter pipe outlet. Levels and falls to suit existing outlet. New road gullies as shown to be connected into new pipeline. All works to be in accordance with Lincolnshire County Council and South Holland Internal Drainage Board requirements.

Road Improvements
Road frontage to site along Stonegate to be widened to a minimum width of 5m. All works to conform to Lincolnshire County Council Development Road Specification and Construction 1997.

Landscaping
Plant trees as shown, minimum height on planting to be 2m.

SB Silver birch
FM Field maple
H Hawthorn

To site frontage where shown plant hawthorn hedge.

Foul Drainage
Connect to existing foul drainage system in Church Gate and Stonegate as shown.

Street Lighting
6 no. high pressure sodium 5m tubular street lighting columns with post top mounted Philips METROTIC¹ lanterns for 70 watt SON-T lamp and SELC ECU.

Existing lighting to be removed.

For street lighting details and specification etc. see Harlite information dated 12.08.98.

SOUTH HOLLAND DC HOUSING & PLANNING
21 MAY 1999
Ref: 125/98.

B - PLOT ADDED - 74.99
A - DRAINS ETC. - 263.99

DESIGN Status
CONSULTANTS IN ARCHITECTURE & PLANNING

RESIDENTIAL DEVELOPMENT AT STONEGATE, GEDNEY FOR

G. T. L. DEVELOPMENTS

1:500
NOV-98
771987/4
B.GILHAM.

2 Edinburgh Walk, Holbeach, Spalding, Lincs. PE12 7AP.
Tel: 01406 424343 Fax: 01406 490702

AMENDED PLAN

SITE PLAN

PROVIDE 1.8m WIDE FOOTPATH TO FULL SITE FRONTAGE WITH 2.0m WIDE VERGE BETWEEN ROAD & FOOTPATH CONSTRUCTED ALL IN ACCORDANCE WITH L.C.C. DEVELOPMENT ROAD SPECIFICATION & CONSTRUCTION 1991

Add one to each plot number.

External Materials
Marley Mendip, Old English Dark Red roof tiles to Plots 1,2,3 & 4.

Marley Mendip, Smooth Grey roof tiles to Plots 5, 6, 7 & 8.

LBC Kempston, Cantata Antique facing bricks to Plots 1 & 3.

LBC Kempston, Seville Antique facing bricks to Plots 3 & 4.

LBC Kempston, Andante Golden Buff facing bricks to Plots 5 & 6.

LBC Kempston, Mozart Blend facing bricks to Plots 7 & 8.

THIS DRG. TO BE READ IN CONJUNCTION WITH ULLSWATER, LANGDALE, DERWENT, CONISTON, G.T.L./D.G./1, G.T.L./D.G./2 & HARLITE INFORMATION DATED 12.8.98

