

'KINGSWOOD' EVOLUTION 2000 METRO MODEL M38
5.8m HIGH LIGHTING COLUMN WITH PRECINCT POST TOP
LANTERN. PRE-FITTED WITH DAWN-DUSK PHOTO CELL
AT FRONT ENTRANCE PROVIDE 'KINGSWOOD' OPAL BRKT
SUPPORTING 2000 PENDANT LANTERN PRE-FITTED WITH
DAWN-DUSK PHOTO CELL

ROAD, FOOTPATH & PARKING TO BE 'MARSHALS MONO LTD' TEGULA CONCRETE SETT PAVING
ALL LAID TO 90 deg HERRINGBONE PATTERN WITH SINGLE SIZE 160 x 240 BLOCKS
ROAD & PARKING TO BE BURNT OCHRE
ALL ROAD KERBS TO BE 'MARSHALL MONO LTD. CHARNWOOD COLOUR BUFF

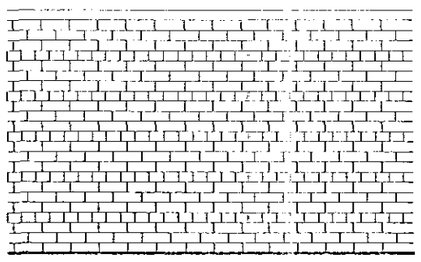

BRICK WALLING DETAIL

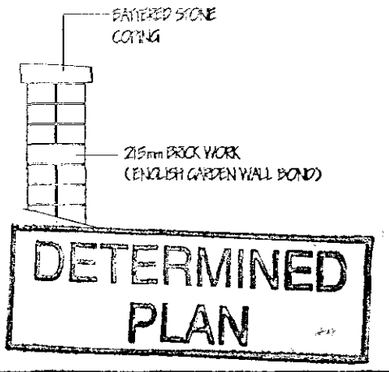

DETERMINED PLAN

AMENDED PLAN

Ref.

LANDSCAPE SCHEME

A MIXED HEDGE PLANT HT. 45 - 60 cm @ 40 cm c/c.
- (a) HAWTHORN (CRATAEGUS MONOGYNA)
- (b) BEECH (FAGUS SYLVATICA)
- (c) BLACKTHORN (PRUNUS SPINOSA)
- (d) BUCKTHORN (RHAMNOS CATHARTICA)

B 1.8m HIGH CLOSE BOARDED TIMBER FENCE

ref:	revision	date
D	FENCE IN LIEU OF WALL, ETC.	JAN '05
C	PLANNING CONDITION COMP.	SEPT. '04
B	R.W. DRAINAGE ADDED	MAY. '04
A	DRAINAGE ADDED	MAR. '04

G. R. MERCHANT
I.ENG AMICE FIWO
ARCHITECTURAL, STRUCTURAL AND LAND DRAINAGE CONSULTANTS
Unit 4, Wrights Mews
12A Park Road, Holbeach,
Spalding, Lincs. PE12 7EE
Tel: 01406 490600
Fax 01406 425744
E-Mail: G. R. Merchant @ Merchant. Fsnet. Co. UK

Project
PROPOSED RESIDENTIAL DEVELOPMENT
ROMAN BANK
OEDNEY DYKE
SPALDING LINCS.

Client
MR & MRS K. HARGREAVES

Drawing
BLOCK / LOCATION PLANS


Job Ref.	Drawing No.
729-03	03-D
Date: AUGUST '03	Drawn: J.C.

Scales
1:200

DO NOT SCALE FROM THIS DRAWING
This drawing is copyright and may not be altered, traced, photographed or used for any other purpose other than that for which it is issued.
The General Contractor is to check all dimensions on site and report any discrepancies to the Architect.
All details shown on this drawing including foundations are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions which may be discovered during construction unless reported to the Architect so that design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken.

NORTH

SHDC
Planning & Development
04 FEB 2005
Ref: 1298/04

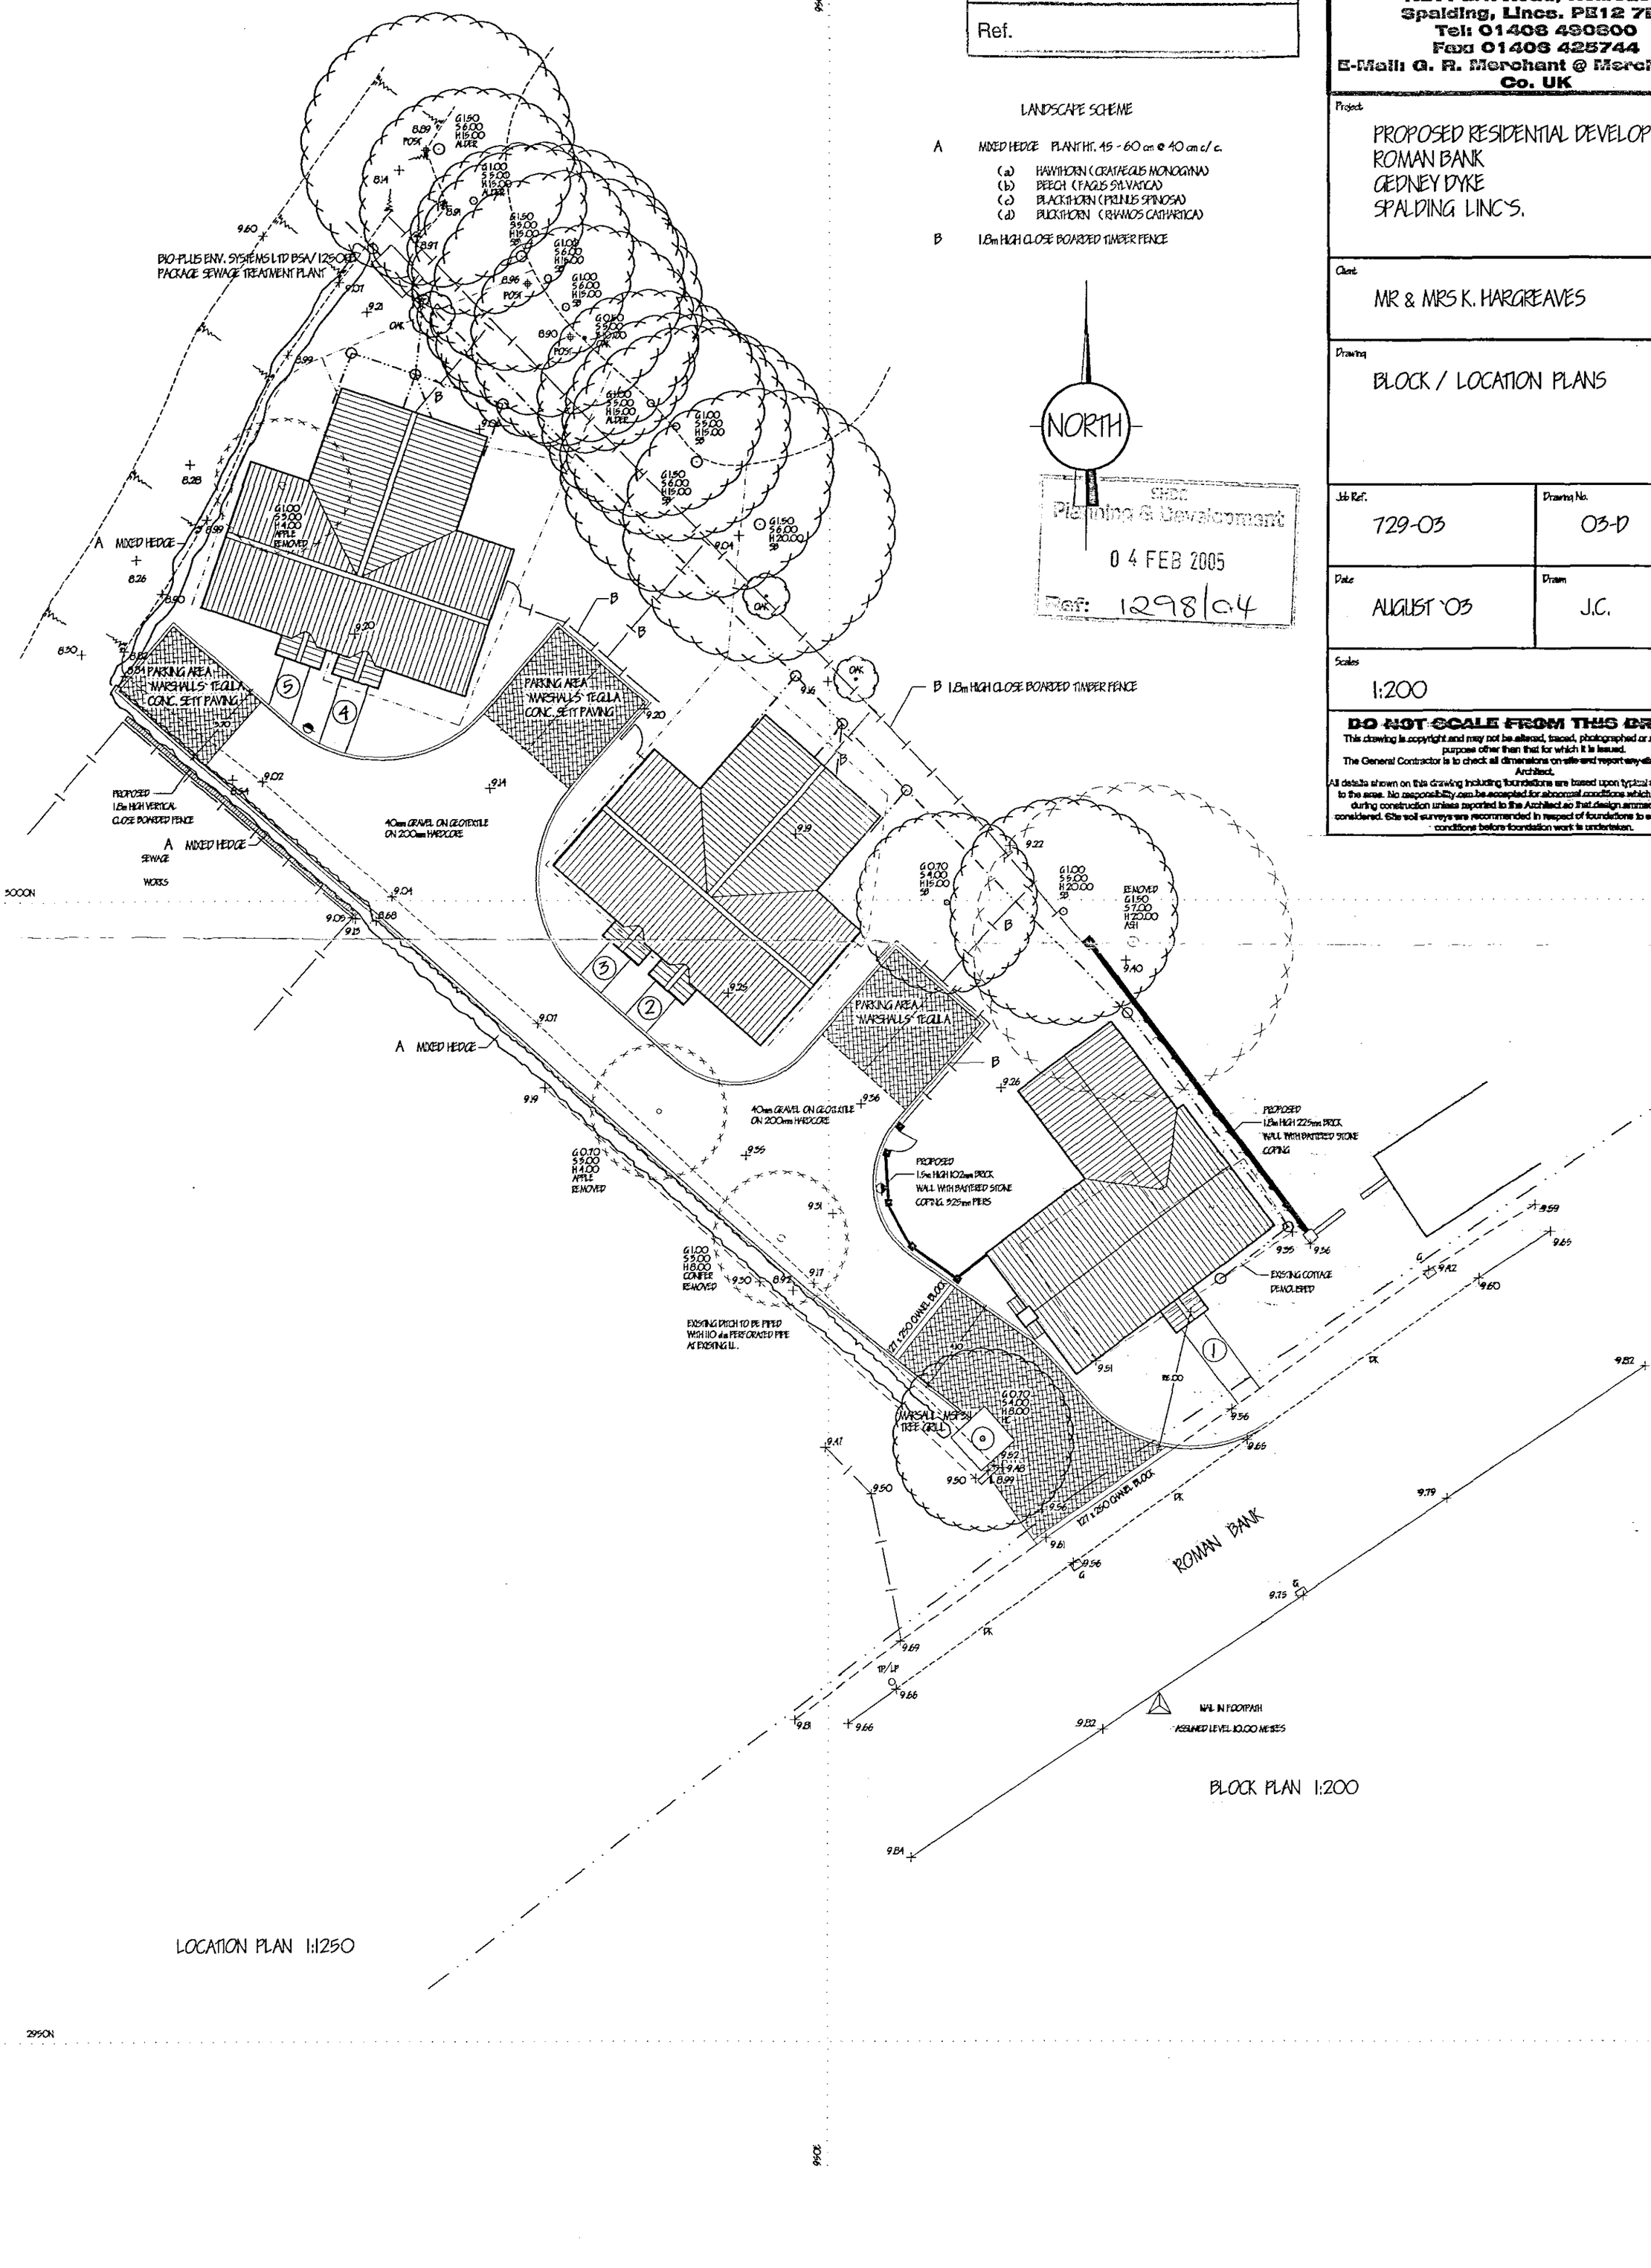

LOCATION PLAN 1:1250

BLOCK PLAN 1:200