

"KINGSWOOD" EVOLUTION 2000 METRO MODEL M38
5.8m HIGH LIGHTING COLUMN WITH PRECINCT POST TOP
LANTERN. PRE-FITTED WITH DAWN-DUSK PHOTO CELL
AT FRONT ENTRANCE PROVIDE "KINGSWOOD" OPAL BRKT
SUPPORTING 2000 PENDANT LANTERN PRE-FITTED WITH
DAWN-DUSK PHOTO CELL

ROAD, FOOTPATH & PARKING TO BE "MARSHALS MONO LTD" TEGULA CONCRETE SETT PAVING
ALL LAID TO 90 deg. HERRINGBONE PATTERN WITH SINGLE SIZE 160 x 240 BLOCKS
ROAD & PARKING TO BE BURNT OCHRE
ALL ROAD KERBS TO BE "MARSHALL MONO LTD. CHARNWOOD COLOUR BUFF

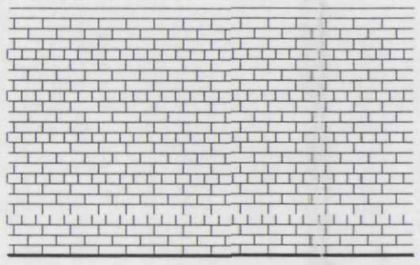

BRICK WALLING DETAIL



INITIAL SKETCH ONLY

SUPERSEDED

LANDSCAPE SCHEME

A MIXED HEDGE PLANT HT. 45 - 60 cm @ 40 cm c/c.
- (a) HAWTHORN (CRATAEGUS MONOGYNA)
- (b) BEECH (FAGUS SYLVATICA)
- (c) BLACKTHORN (PRUNUS SPINOSA)
- (d) BUCKTHORN (RHAMOS CATHARTICA)

B 1.8m HIGH CLOSE BOARDED TIMBER FENCE

C	PLANNING CONDITION COMP.	SEPT. '04
B	R.W. DRAINAGE ADDED	MAY. '04
A	DRAINAGE ADDED	MAR. '04
ref:	revision	date

G. R. MERCHANT
I.ENG AMICE FIWO
ARCHITECTURAL, STRUCTURAL AND LAND DRAINAGE CONSULTANTS
Unit 4, Wrights Mews
12A Park Road, Holbeach,
Spalding, Lincs. PE12 7EE
Tel: 01406 490800
Fax: 01406 425744
E-Mail: G. R. Merchant @ Merchant. F9. Co. UK

Project
PROPOSED RESIDENTIAL DEVELOPMENT
ROMAN BANK
GEDNEY DYKE
SPALDING LINC'S.

Client
MR & MRS K. HARGREAVES

Drawing
BLOCK / LOCATION PLANS

Job Ref.	Drawing No.
729-03	03-C
Date: AUGUST '03	Drawn: J.C.

Scales
1:200

SHDC
Planning & Development
2 0 DEC 2004
Ref:

DO NOT SCALE FROM THIS DRAWING
This drawing is copyright and may not be altered, traced, photographed or used for any other purpose other than that for which it is issued.
The General Contractor is to check all dimensions on site and report any discrepancies to the Architect.
All details shown on this drawing including foundations are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions which may be discovered during construction unless reported to the Architect so that design ammendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken.

NORTH

BIO-PLUS ENV. SYSTEMS LTD BSA/1250 PACKAGE SEWAGE TREATMENT PLANT

PARKING AREA "MARSHALLS" TEGULA CONC. SETT PAVING

PROPOSED 1.8m HIGH 225mm BRICK WALL WITH BATTERED STONE COPING

FENCE IN LIEU OF WALL

SEWAGE WORKS

40mm GRAVEL ON GEOTEXTILE ON 200mm HARDCORE

B 1.8m HIGH CLOSE BOARDED TIMBER FENCE

A MIXED HEDGE

PROPOSED 1.5m HIGH 102mm BRICK WALL WITH BATTERED STONE COPING. 525mm PIERS

PROPOSED 1.8m HIGH 225mm BRICK WALL WITH BATTERED STONE COPING

EXISTING COTTAGE DEMOLISHED

EXISTING DITCH TO BE PIPED WITH 110 dia PERFORATED PIPE AT EXISTING LL.

127 x 250 CHANNEL BLOCK

MARSALL MET 30 TREE (RBL)

ROMAN BANK

NAIL IN FOOTPATH
ASSUMED LEVEL 10.00 METRES

BLOCK PLAN 1:200

LOCATION PLAN 1:1250