Highstock Lane

footpath

Note
New Vehicular Access to be constructed in accordance with LCC Specification and Construction Details for standard Light Duty flexible dropped crossing

grass

Crate System for roof water infiltration

pa

garage

granite chippings

driveway to include turning area.

grass

Plot 2
(under construction)

grass

dining
living
utility
wc
c
hall
bath
bed
kitchen
bed
c
en suite
bed

1.8m high timber closeboard fence

1.2m high timber closeboard fence

pa
Crate System for roof water infiltration
grass
driveway to include turning area.
granite chippings
garage
grass
grass
bed
bath
living
en suite
c
bed
dining
hall
c
wc
utility
bed
kitchen

1.2m high timber closeboard fence

plot 2

1.8m high timber closeboard fence

grass

BioDisc Treatment Unit

Crate System for roof water infiltration

Proprietary Crate System for infiltration

bp

plot 3

1.8m high timber closeboard fence

Crate System for roof water infiltration

grass

plot 4

N

proposed 1.2m high timber post & rail fence to match adjacent plots with native species hedgerow planted inside boundary fence

pa

bp

Proprietary Crate System for infiltration

BioDisc Treatment Unit

1.8m high timber closeboard fence


bp

plot 5

proposed 1.2m high timber post & rail fence to match adjacent plots with native species hedgerow planted inside boundary fence

Site Layout

1:250 scale

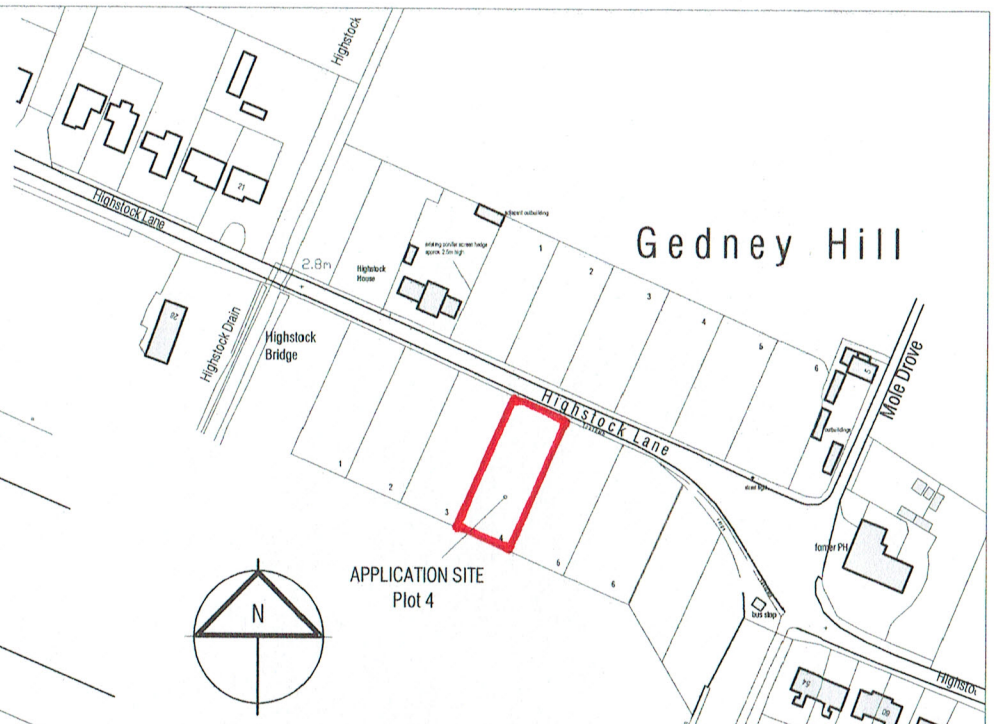

Location Plan

1:1250 scale

Landscaping & Boundary Treatment
Tree Planting to be 1.8m - 2.m high suitably staked and tied
bp - *betula pendula* Silver Birch
pa- *prunus avium* Wild Cherry

Native Mixed Species Hedgerow
70% hawthorn : 30% mixed species - blackthorn, hazel, field maple, holly
30-50cm in double staggered rows 5 plants per metre run.
to plot frontage and planted inside 1.2m high timber post & rail fencing to rear boundary

Rear gardens to be divided by 1.8m high timber closeboard fence.
Front & Rear Gardens to be turfed
Driveways to be permeable (gravel / granite chippings) with tarmac apron in verge onto highway in accordance with LCC Highways specification.

Drainage
Foul Drainage - Install Package Treatment Unit in accordance with Building Regulations and other relevant legislation. Discharge of treated water to suitably sized proprietary soakaways
(Soakaways subject to satisfactory soil percolation tests in accordance with BRE 365)

Surface Water Drainage - Roof water to discharge into suitably sized and located soakaways in accordance with Building Regulations.

mlp Moulton Land and Planning
moultonlandandplanning.co.uk 1 Chapel Court Wansford Peterborough PE8 6JF
tel 01780 782306 mob 07484 101655 e-mail alan@moultonland.co.uk

Project
Proposed Residential Development land to south of Highstock Lane Gedney Hill for Mrs. K. Watts

Drawing
Plot 4 (south) Location Plan & Site Layout

date jan 2021
scale(s) 1:1250 & 1:250 @A3
DRG. No. WAT / pl P4south / SL