


Proposed Residential Development Highstock Lane, Gedney Hill, Spalding Lincs
30/04/21



PLS TO BE
D. NEWLINE



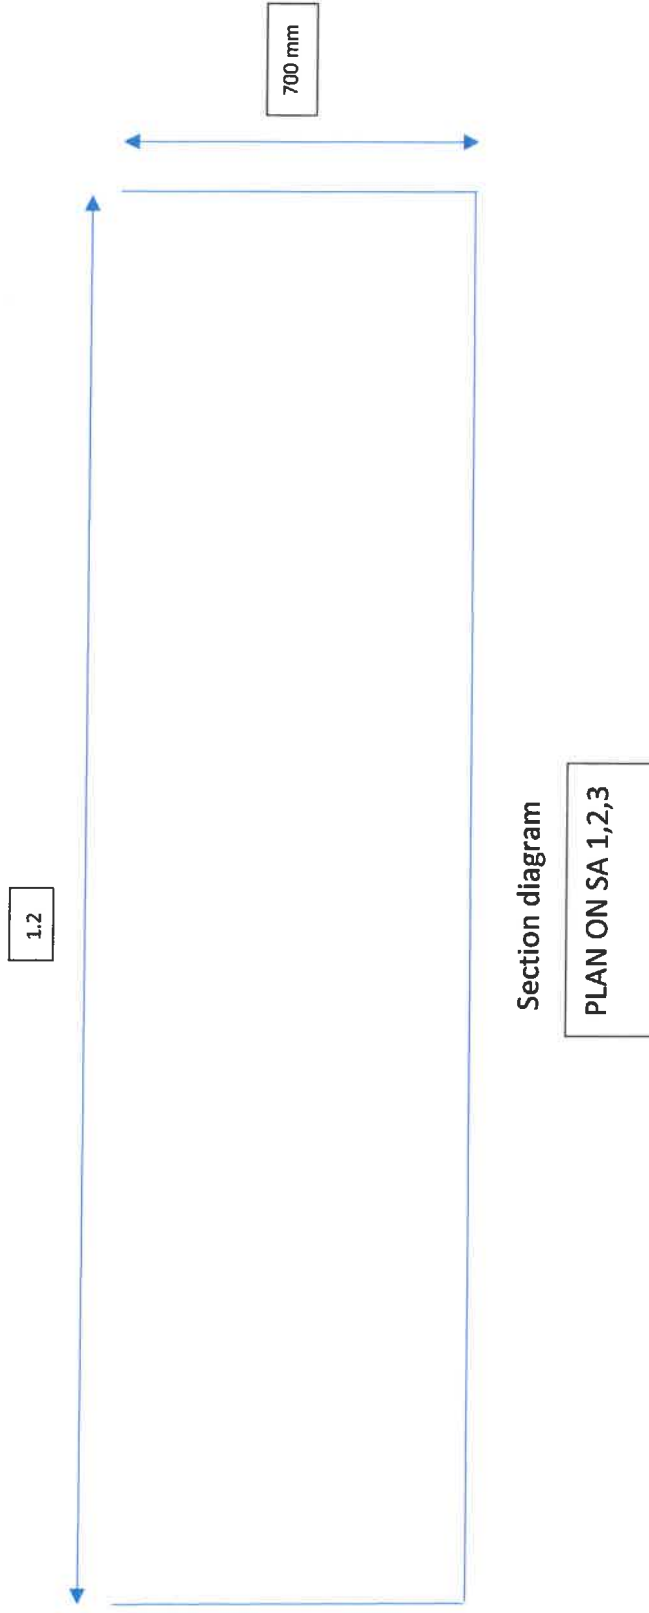

Each trial hole was filled with water to a depth of 300mm and timed from 75% filled down to 25%

Hole 1

Time in mins	Depth of water
0	225
110	75

Time in seconds 6360/150mm = 42.4 (v) seconds to drop every mm

Hole 2

Time in mins	Depth of water
0	225
118	75

Time in seconds 6520/150mm = 43.4 (v) seconds to drop every mm

Hole 3

Time in mins	Depth of water
0	225
125	75

Time in seconds 7230/150mm = 48.2 (v) seconds to drop every mm

Average V Value = 44.66