



SECTION THRO CHIMNEY AT GABLE END





SECTION THRO ROOF


DUMMY CHIMNEY

PITCHED ROOF CONSTRUCTION - OVER GARAGE.
Interlocking concrete roof tiles to B.S. EN 490 / 491, on 25 x 38 softwood treated battens on 'Dupont' Tyvek Supro membrane in accordance with BBA cert. 04/4101(second issue) in all cases to be lapped by minimum 150mm both vertically and horizontally. Tiles to be laid with min. head lap of 75mm and to be fixed in accordance with regard to wind speed, roof pitch and exposure category as detailed in B.S. 5534 6399. Pt 2. Insitu cast roof to a pitch of 50 deg. 225 x 225 Ridge board. 47 x 150 Jack Rafters at 400mm c.c. 47 x 100 ceiling joists at 400mm c.c. 53 x 100 ceiling binders. All rafters to be strapped to wall plate by 30 x 5 galvanised metal straps acting as anchor and lateral restraint straps at max. 1.9m c/c. Note: provide solid bridging beneath straps: 50 x 100 wall plate bedded on sand and cement: 25 x 175 fix cis boards: 6mm ext. grade plywood soffit: All structural timber to be min SC3 grade, stamped "DRY" or "KD" to indicate moisture content of 20% or less all in accordance with BS. 4978: Timber supports are to be provided beneath water storage tanks over 4No cert no joists. At roof intersections provide 25 x 100 lay boards and diminishing trusses at 600 c/c: Install code 4 lead valley liner.


DORMER CONSTRUCTION
Form 90 deg. pitch dormer as shown on plans roof covering as main roof on 47 x 100 rafters and ceiling joists at 400 c/c on 50 x 100 head plate: 12.7mm plasterboard and skim to ceiling with 100mm glass fibre insulation laid between joists and 150mm laid over joists: Form external walls and cheeks of 19 x 125 treated timber on 25 x 38 treated timber studs at 400 c/c on breather paper then 11 to 9mm ext. grade sheathing ply on 50 x 100 timber studs at 400 c/c 100mm "Ubitate 50" insulation infill between studs: finish internally with 12.7mm Gyproc "duplex" plasterboard and skim: Form code 4 lead flashing to dormer cheeks.

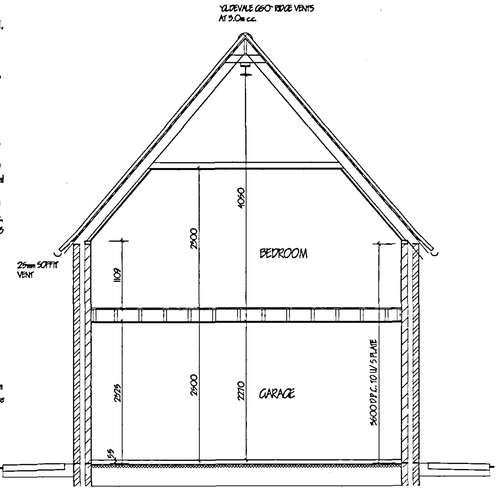


TYPICAL GARAGE SECTION

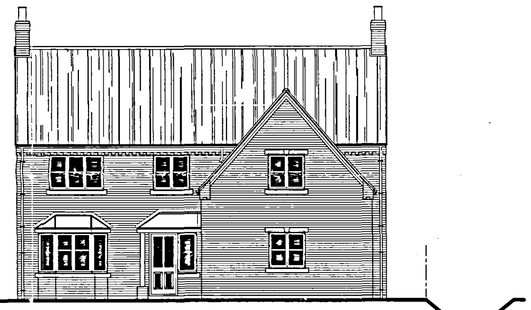


FRONT ELEVATION

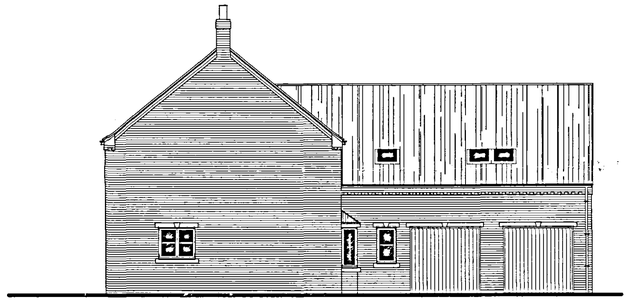


SIDE ELEVATION

EXTERNAL MATERIALS.
WALLS - IBSTOCK PARKHOUSE RED
ROOFS - SANDTOFT CALDERDALE SLATE - GREY.
STONE LINTELS & CILLS.

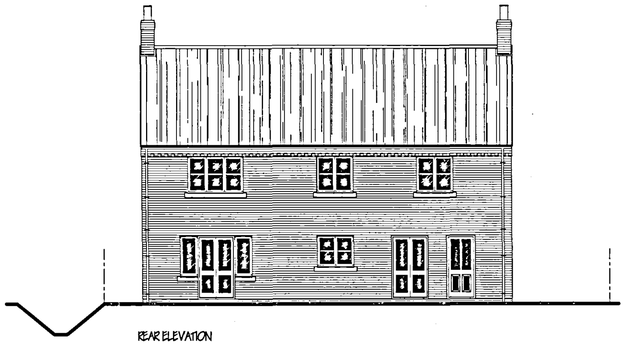

REAR ELEVATION

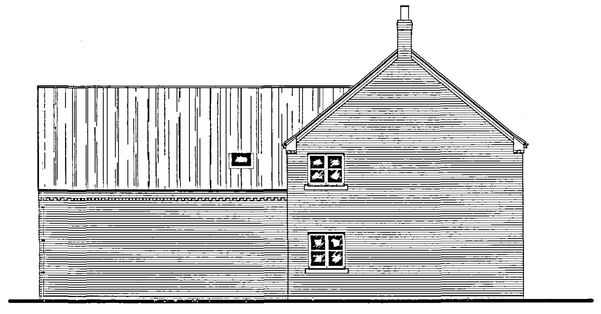

SIDE ELEVATION

| | | |
|---|---|---|
| | | |
| | | |
| | | |
| | | |
| D. | REMOVE DORMER WINDOW - PLANNING. | NOV '06. |
| C. | REMOVE STONE COURSE & AMEND STAIR - PLANNING. | NOV '06. |
| B | REDUCE SIZE FOLLOWING PLANNING REFUSAL | SEPT '06 |
| A. | REDUCE SIZE - FOLLOWING PLANNING REFUSAL. | JUNE '06. |
| ref. | revision | date |

**G. R. MERCHANT** I.ENG AMICE FIWO
**ARCHITECTURAL, STRUCTURAL AND LAND DRAINAGE CONSULTANTS**
Unit 4, Wrights Mews
12A Park Road, Holbeach,
Spalding, Lincs. PE12 7EE
Tel: 01406 490800
Fax: 01406 425744
E-Mail: G. R. Merchant @ Merchant. Fs. Co. UK

Project
PROPOSED HOUSE & GARAGES.
NORTH ROAD.
OSBNEY HILL.
SPALDING. LINC'S..

Client
MR. & MRS. C. CANNON.

Drawing
ELEVATIONS & SECTIONS.

| Job Ref. | Drawing No. |
|---|---|
| 1316-06. | 020. |
| Date: MARCH '06. | Drawn: GRM. |

Scales
1/50. 1/100.

**DO NOT SCALE FROM THIS DRAWING**
This drawing is copyright and may not be altered, traced, photographed or used for any other purposes other than that for which it is issued. The General Contractor is to check all dimensions on site and report any discrepancies to the Architect. All details shown on this drawing including foundations are subject to Local Authority conditions relating to the area. No responsibility can be accepted for errors or omissions which may arise from information supplied or instructions given to consultants. Site soil surveys are not to be carried out as their design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken. This drawing is limited to the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning / Building Regulation approval. This drawing must not be used as a contract document alone. The works will not be supervised or inspected on site by G.R. Merchant or any representative thereof. It is the client or their appointed agents responsibility to control workmanship, substitution of materials, adherence to specification, variations to contract etc.All materials to be new unless otherwise stated and all components and materials are to be used, fixed, applied or installed in accordance with the manufacturers instructions. All timber and timber based materials shall conform to appropriate British standard specification or BBA certificate or European code equivalent. The Employer / Client shall ensure that the selected contractor is conversant with and employs all measures necessary to achieve compliance with Health and Safety legislation for Building sites and Work places. The Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations an Independent Planning Supervisor will be required. The works shall comprise of all that is shown on the drawing and details. Work that may not specifically be shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included. It is the plot / land owners responsibility to be aware of the Party Wall etc. Act 1996 when building in close proximity to adjoining neighbors boundaries.

2 [illegible]
1366/06

A2

DEVELOPMENT [illegible]