BRICKS & TILES FOR HOUSE & GARAGE

BRICKS - TRADITIONAL BRICK & STONE LTD - AUDLEY ANTIQUE

TILES - ROSALINA SPANISH SLATE

NOTE: DPC LEVEL OF NEW DWELLING TO BE 150MM ABOVE FRONTAGE ROAD [NORTH ROAD, OEDNEY HILL]

FOUL WATER DISPOSAL TO ON-SITE PRIVATE PACKAGED TREATMENT PLANT

RAINWATER DISPOSAL TO BRICK RUBBLE SOAKAWAYS.

LANDSCAPING, TREE PLANTING & FENCING SCHEME.


A MIXED HEDGE
(a) Hawthorn (Crataegus Monogyna)
(b) Beech (Fagus Sylvatica)
(c) Blackthorn (Prunus Sphosa)
(d) Buckthorn (Rhamnos Cathartica)

B SILVER BIRCH (BETULA PENDULA) FEATHERED
C HAWTHORN (CRATAEGUS LAEVIGATA) FEATHERED
D WHITEBEAM (SORBUS ARIA) FEATHERED
E 1.8 METRE HIGH VERTICAL CLOSE BOARDED FENCE
F FRONTAGE DYKE TO BE PIPED & BACKFILLED TO THE REQUIREMENTS OF L.C.C. & S.H.I.D.B.
G NEW ACCESS TO NORTH ROAD TO THE REQUIREMENTS OF L.C.C. (KERBS & TARMAC)
H EXISTING 1.8 METRE HIGH VERTICAL CLOSE BOARDED FENCE
J BLOCK PAVING
K GRAVEL
L FOOTPATH - SLABS


All planting to be in accordance with BS 4428:1989 and amendment No. 1 (1991)

All trees to be planted with minimum 0.6m plastic mulch mat and to be staked, tied and tubed.

1/3 to ½ bag of peat free tree and shrub planting compost to be incorporated into backfill for each tree hole.

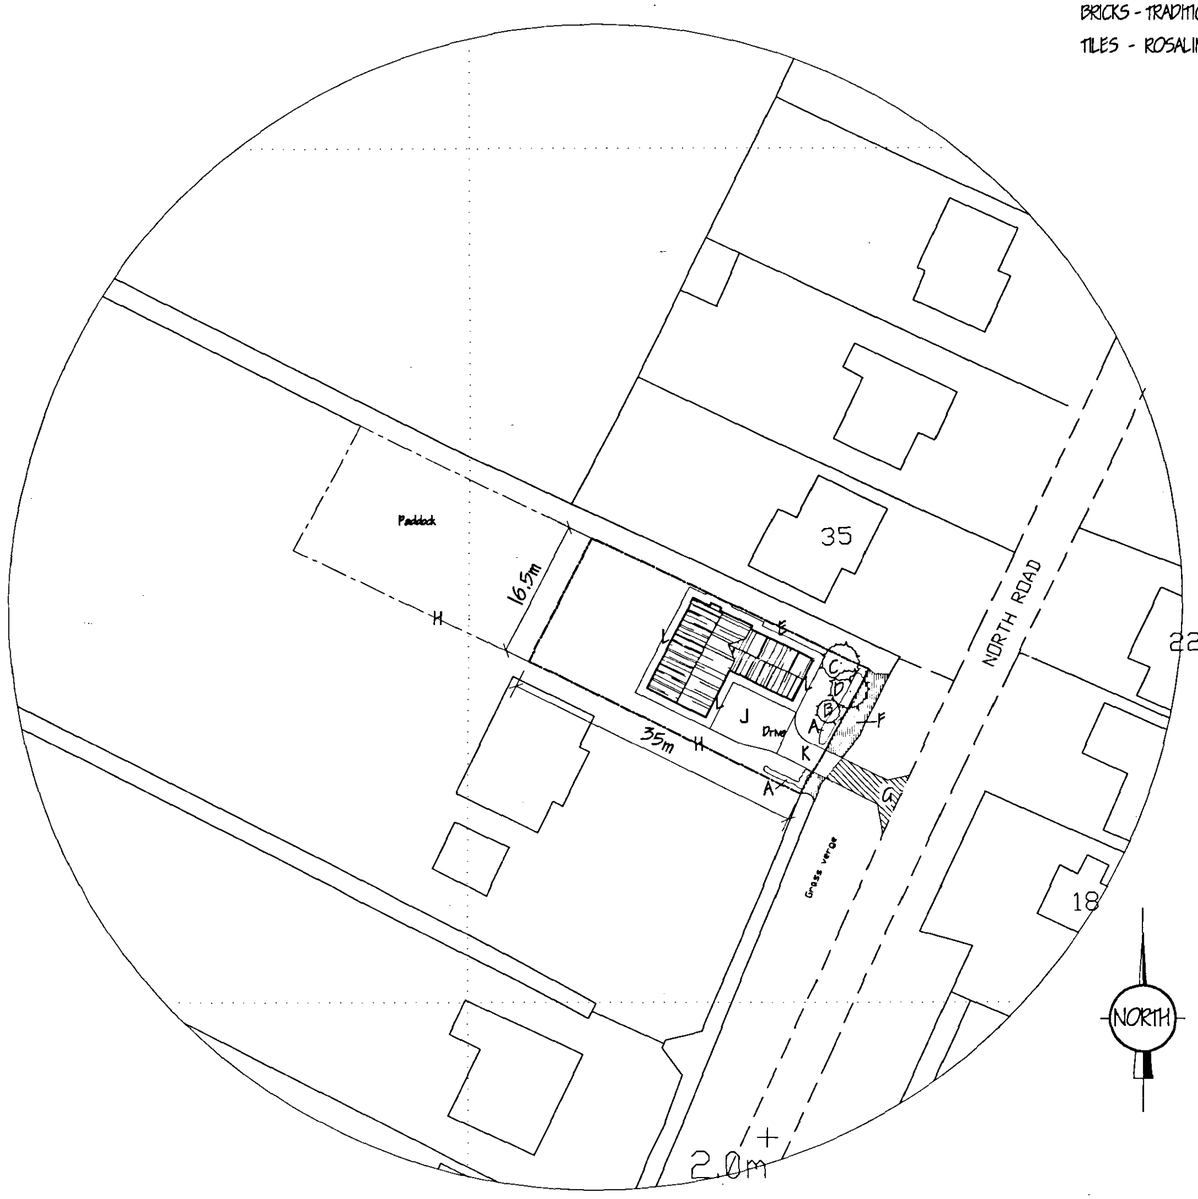

SITE PLAN
1/500

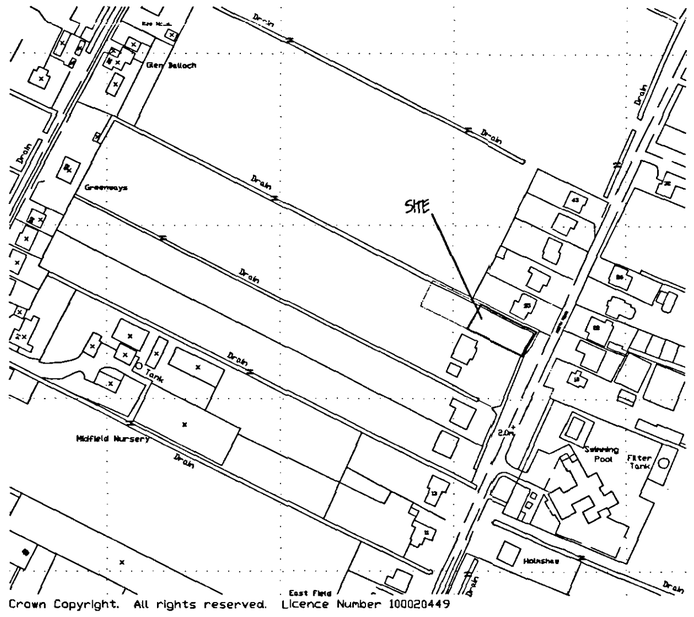

Crown Copyright. All rights reserved. Licence Number 100020449

LOCATION PLAN.
1/2500

DETERMINED PLAN

SHDC
PLANNING & DEVELOPMENT
- 4 DEC 2006
Ref. 16/11/06

ref:	revision	date
C	CONDITION COMPLIANCE	DEC '06
B	REPLICE & RE-POSITION ON SITE - PLANNING REFUSAL	SEPT '06
A	REPLICE & RE-POSITION ON SITE - PLANNING REFUSAL	JUNE '06.

G. R. MERCHANT
I.ENG AMICE FIWO
ARCHITECTURAL, STRUCTURAL AND LAND DRAINAGE CONSULTANTS
Unit 4, Wrights Mews
12A Park Road, Holbeach,
Spalding, Lincs. PE12 7EE
Tel: 01406 490800
Fax: 01406 425744
E-Mail: G. R. Merchant @ Merchant. FS. Co. UK

Project
PROPOSED HOUSE & GARAGES.
NORTH ROAD.
OEDNEY HILL.
SPALDING. LINC'S.

Client
MR. & MRS. C. CANNON.

Drawing
SITE & LOCATION PLANS.

Job Ref.	Drawing No.
1316-06.	05C.
Date: APRIL '06.	Drawn: GRM.

Scales
AS INDICATED.

DO NOT SCALE FROM THIS DRAWING
This drawing is copyright and may not be altered, traced, photographed or used for any other purpose other than that for which it is issued. The Original Contractor is to check all dimensions on site and report any discrepancies to the architect. All details shown on this drawing including foundations are based upon typical site conditions believed to be ours. No responsibility can be accepted for structural conditions which may be dimensional during construction unless reported to the Architect so that design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken. This drawing is limited to the amount of information contained and does not purport to include a full specification of the works. It is solely for the purposes of obtaining Planning / Building Regulation Approval. This drawing should not be used as a contract document alone. This works will not be inspected or approved on site by G R Merchant or any representative thereof. It is the client or their appointed agents responsibility to ensure workmanship, quantities of materials, adherence to specification, conditions to consents etc.
All materials to be new unless otherwise stated and of components and materials etc. to be used fitted and installed etc. to strict accordance with manufacturers instruction and relevant code of practice. Materials shall conform to appropriate British standard specification or BBA certificate or European made equivalent. The Employer / Client shall provide and the contractor is experienced with and adopts all measures necessary to ensure compliance with Health and Safety legislation for building sites and all persons. The Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations an appointment Planning Supervisor will be required. The works shall advertise all of but is shown on the drawing and details. Work that may not specifically shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.