

PROPOSED DEVELOPMENT AT SILTSIDE,
GOSBERTON CLOUGH, SPALDING, PE11 4JR
FLOOD RISK ASSESSMENT



View of site from Siltside

S M Hemmings B Sc C Eng MICE MIWEM,
69 Charlotte Way,
Peterborough,
PE3 9ER

This flood risk assessment has been prepared solely to support the planning application for a development at Siltside, Gosberton Clough. The author has made every effort to provide an accurate assessment of the flood risk but accepts no liability should the information be found to be incorrect or incomplete, or if it is used for any other purposes other than for which it was originally commissioned.

Introduction

A Planning Application is due to be submitted to South Holland District Council to replace the existing dilapidated house with a new house at the plot known as Rainbow Lodge Siltside, Gosberton Cough, north of Spalding.

The site is in Flood Zone 3 as shown on the Environment Agency's Flood Zone map. The flood zone maps do not take into account existing flood defences.

The Planning Application therefore requires a flood risk assessment to be carried out as required in the Technical Guidance to the National Planning Policy Framework Development and Flood Risk. The site is within a defended area as specified in the South Holland District Council's Strategic Flood Risk Assessment and is located in the Black Sluice Internal Drainage Board District.

Environment Agency (EA) Flood Zones

The map below is taken from the Environment Agency website and shows the flood zones in the area.



It can be seen that the site itself is within flood zone 3, but there are areas east and west of the site, which are at a similar ground level, in flood zone 1.

Application Site

The development is located east side of the village of Gosberton Cough, and is 3.5km east of the South Forty Foot Drain. The National Grid Reference of the site is 519630 329770.

The location of the site is shown on the plan at the end of this document.

As the site is within a defended area the proposed development can be classified as within Flood Zone 3(a) as detailed on the Environment Agency's flood zone maps without defences, as defined in Table 1 of the Technical Guidance.

Applying the flood risk vulnerability classification in Table 2 of the Guidance, a development consisting of residential housing is classified as “more vulnerable”.

Table 3 of the Guidance is shown below:

Flood Zones	Flood Risk Vulnerability Classification				
	Essential infrastructure	Highly vulnerable	More vulnerable	Less vulnerable	Water compatible
Zone 1	✓	✓	✓	✓	✓
Zone 2	✓	Exception Test required	✓	✓	✓
Zone 3a †	Exception Test required †	X	Exception Test required	✓	✓
Zone 3b *	Exception Test required *	X	X	X	✓*

Therefore it can be seen that for “More vulnerable” development the sequential and the exception tests need to be applied to the development.

Sequential Test

The aim of the Sequential Test, as set out in the Planning Practice Guidance, is to ensure that a sequential approach is followed to steer new development to areas with the lowest probability of flooding. The flood zones as defined in the Strategic Flood Risk Assessment for the area provide the basis for applying the Test. The aim is to steer new development to Flood Zone 1 (areas with a low probability of river or sea flooding). Where there are no reasonably available sites in Flood Zone 1, local planning authorities in their decision making should take into account the flood risk vulnerability of land uses and consider reasonably available sites in Flood Zone 2 (areas with a medium probability of river or sea flooding), applying the Exception Test if required. Only where there are no reasonably available sites in Flood Zones 1 or 2 should the suitability of sites in Flood Zone 3 (areas with a high probability of river or sea flooding) be considered, taking into account the flood risk vulnerability of land uses and applying the Exception Test if required.

Much of the area around Gosberton Clough, as can be seen from the map on page 2 of this report, is in Flood Zone 3. Therefore it would be difficult to find a similar site for the development within flood zones 1 and 2 in this area.

As the proposed development is a replacement for an existing building an alternative location cannot be considered.

The safety of the development will be delivered by ensuring the ground floor level of the proposed new dwelling is above predicted residual flood levels for this area.

The South Holland District Council Core Strategy allows for old buildings such as these to be brought forward for replacement.

Therefore I consider that the sequential test has been passed.

Exception Test

The Sequential Test has demonstrated that it is not possible, consistent with wider sustainability objectives, for the development to be located in zones with a lower probability of flooding. Therefore the Exception Test must be applied and for this to be passed:

- It must be demonstrated that the development provides wider sustainability benefits to the community that outweigh flood risks, informed by the Strategic Flood Risk Assessment; and
- A site-specific flood risk assessment must demonstrate that the development will be safe for its lifetime taking into account of the vulnerability of its users, without increasing flood risk elsewhere, and where possible will reduce flood risk overall.

Both parts of this test must be satisfied in order for the development to be considered appropriate in terms of flood risk. There must be robust evidence in support of every part of the test.

The first section will be demonstrated by the Supporting Planning Statement and compliance with South Holland District Council's planning policies.

This flood risk assessment will demonstrate that the development will be safe for its lifetime and it will not increase flood risk elsewhere.

Strategic Flood Risk Assessment

Consultants have produced a Strategic Flood Risk Assessment (SFRA) for the South Holland District Council (SHDC). This document provides details of the flood risk in the Council's area. Reference to the maps in this document give the following information for the actual flood risk and hazard at the site for the 1% fluvial event and 0.5% tidal event.

For the present day	Depth of flooding ... zero
	Extent of flooding .. Low or medium
	Velocity Nil
For year 2115	Depth of flooding ... 0 – 500mm
	Extent of flooding .. Low or medium
	Peak Velocity 0 – 0.1m/sec

The maps showing the residual flood hazard were revised in the 2016 update of the South Holland District Council Strategic Flood Risk Assessment which can be found on the website of the South East Lincolnshire Joint Planning Committee. The hazards are as follows for the 1% fluvial or 0.5% tidal event probability:

For the present day	Depth of flooding.... zero
---------------------	----------------------------

	Extent of flooding	Low or medium
	Hazard	None
	Velocity	zero
For the year 2115	Depth of flooding	zero
	Extent of flooding ...	Low or medium
	Hazard	none
	Velocity	zero

Figure 16 of the general maps shows that the site is not within the rapid inundation zone for the present day or in 2115.

Maximum flood level and bank levels in the River Glen

The maximum levels in this section of the River Glen approximately 4.4 km south of the site at chainage 11km are as follows:

	2007	2115
Peak 1 in 100 year level	4.73m OD	4.97m OD
Peak 1 in 1000 year level	5.04m OD	5.25m OD

The defence level (top of left bank) south of the site is 5.93m OD which is the average level of this soil bank along this length.

Existing Flood Alleviation Measures

The site is within a defended flood plain, as defined in Appendix 1 of the Environment Agency's "Policy and Practice for the Protection of Flood Plains", which is considered to be passive until such time that a flood greater than the defences can withstand occurs. The likelihood of flooding occurring due to overtopping or failures of the defences is considered to be very low.

The site is located approximately 3.5 km east of the section of the South Forty Foot Drain which is maintained by the Environment Agency. This section is the main arterial channel which conveys the water to the outfall at Black Sluice Pumping Station at Boston.

The site is located approximately 4.4 km north of the north bank of the River Glen which is maintained by the Environment Agency.

The internal watercourses in the area, including the Gosberton Fen Pumping Station, are maintained by Black Sluice IDB.

Existing Ground Levels and Proposed Levels of Buildings

The existing ground level of the area of the site where the new house is proposed is between 2.90m and 3.00m OD. Most of the site is at this approximate level, and the level of Siltside is slightly higher at between 3.00m and 3.15m OD. The dilapidated building on the site has a ground floor level of approximately 3.18m OD. The levels of

the field on the west and north sides seem to be slightly lower at approximately 2.6 to 2.70m OD.

A full topographical study has been carried out for this area and a simplified plan showing the levels on the site is shown on page 11 of this report.

Potential Sources of Flooding

The potential sources of flooding to the site are:-

1. Overtopping of the South Forty Foot Drain.
2. Flooding from the River Glen
3. High water levels in IDB drainage channels
4. Surface water flooding

1. Overtopping of the South Forty Foot Drain.

The section of the South Forty Foot Drain (SFFD) maintained as “Main River” by the Environment Agency (EA) starts at Black Hole Drove Pumping Station and flows northwards and eastwards to the outfall into the Haven at Boston. This outfall is at Black Sluice Pumping Station, where the discharge is through two large sluices during low tide periods. After heavy rainfall in the catchment when flows increase the large diesel powered pumps are operated to increase the flow into the Haven. Flows into the SFFD are by gravity from the highland carriers and pumped discharges from fen areas.

The SFRA predicts maximum water levels of 3.49m OD in the main river section of the SFFD in a 1 in 100 year event in 2115. However these predicted levels were taken from a study carried out in 2004 and has been superseded by further computer modelling undertaken for a more recent study.

The normal level of the South Forty Foot Drain is approximately 0.00m OD but after heavy rainfall the highland carriers react quickly and the level of the Drain can rise to around 3.00m OD in a significant event. This level reduces after 24 hours to below 2.00m OD. Some flooding can occur in the highland carriers west of the SFFD which reduces the risk of flooding from the South Forty Foot Drain.

Following the 2004 studies by the EA Black Sluice IDB undertook a more detailed investigation of bank levels in the southern part of the SFFD and found long lengths with levels of only 3.00m OD. It was concluded from this that the risk of flood levels in the SFFD rising above 3.00m OD were extremely low.

Black Sluice IDB have an operational plan which states that pumping stations will be switched off when the water level at Black Hole Drove Pumping Station reaches 2.70m OD. This will limit the rate of increase of the water levels in the SFFD and reduce the risk of breaches occurring in the banks in the southern section of the drain.

Therefore adequate mitigation will be provided by raising the ground floor level of the proposed building to a minimum level of 3.30m OD.

2. Flooding from River Glen

The River Glen, which is EA main river, is 4.5km south of the site. The maps in the SFRA predict that if a breach were to occur in the River Glen in a 1 in 100 year event in 2115 the flood water will not reach the development site.

Any risk from this source will be adequately mitigated by raising the ground floor level of the proposed house at least 300mm above the lowest land levels on the site.

3. High Water Levels in IDB Drainage Channels

The area of the proposed development is drained by the Risegate Eau which is located on the south side of Siltside. This watercourse is maintained by Black Sluice IDB. This drain is shown in the photograph below.



The Risegate Eau flows in a westerly direction north of High Fen Road (B1397) to Gosberton Fen Pumping Fen which is located on the east side of the South Forty Foot Drain (SFFD). This pumping station controls water levels in this catchment at -0.30m OD by pumping the water into the SFFD. Black Sluice IDB have produced a computer model of the flows in this catchment and the predicted maximum water levels at the eastern end of Risegate Eau at Carters Bridge 1 km east of the development site are:

In a 1 in 100 year event..... 1.69m OD

In a 1 in 100 year event with climate change 1.81m OD

The Black Sluice IDB drains have been designed to a 1 in 10 year standard with a freeboard of between 800mm and 1.0 metres. This generally provides a standard of at least 1 in 50 years for flooding of the lowest land. Much of the land in the catchment is below 3.00m OD and therefore even if the pumps fail to operate for a considerable time during a rainfall event the site is unlikely to flood.

The flood risk from IDB drains will be adequately mitigated by raising the ground floor level of the proposed building by 300mm above the existing ground level on the site.

4. Flooding from the riparian dyke west of the site.

The dyke west of the site does not seem to have an outlet under Siltside side into Risegate Eau and therefore it flows northwards. This system should still provide adequate land drainage for the area around the development.

If a blockage occurred in this dyke water levels could possibly approach 3.00m OD before flood water would flow overland into adjoining drains to alleviate the situation.

The risk of flooding to the proposed property will be adequately mitigated by raising the ground floor level 300mm above the existing land levels on the site..

Extent of known Flooding

During the preparation of this assessment, no evidence was discovered of the site or any of the adjoining properties having been flooded in the past.

In 1999 the west bank of the South Forty Foot Drain breached 100 metres north of Black Hole Drove Pumping Station. An area of farmland was flooded east of the Drain but no properties were flooded. The level of the South Forty Foot Drain was reduced by stopping all of the IDB pumping stations in the area until a temporary repair was carried out, which was less than 12 hours after the breach occurred. In this event no flood water flowed south of Black Hole Drove and all of the flooding was north of Black Hole Drove and south of Star Lode Drove.

Probabilities and Trends of Flooding

The probability of this development flooding from Environment Agency main river is very low. In an extreme event any effect on this location would not be sudden and there would be time for residents to take precautionary measures to limit the impact of any flooding that may occur.

Residual Risk – Extreme Events

The residual risk from extreme events is very low on this site. The major risk to the site is from a breach or overtopping of the tidal defences

The risk of this happening in this case is low and the hazard from any flooding is also low.


Climate Change

The recommendations for flood depths for this flood risk assessment use information mostly taken from the South Holland DC SFRA which was last updated in 2010. The EA have issued new guidance on recommended contingency allowances for predicted sea rises, fluvial flows and rainfall intensities which from 19th February 2016 needs to be considered in the FRA. The effects of these new recommendations are considered in Appendix A of this report (pages 13 to 16). It is concluded that no extra mitigation measures are necessary to comply with the new guidance on climate change.

Conclusions

The risk of the level of the section of the South Forty Foot Drain west of the site increasing above a level above 3.00m OD has been shown to be extremely low, and the risk of flood levels in this area of Gosberton Clough increasing above 3.00m OD in a 1 in 100 year event in 2115 is remote.

The SFRA indicates that there is no predicted risk of flooding in this area of Gosberton Clough in a 1 in 100 year event in 2115. The relevant part of the map is reproduced below.

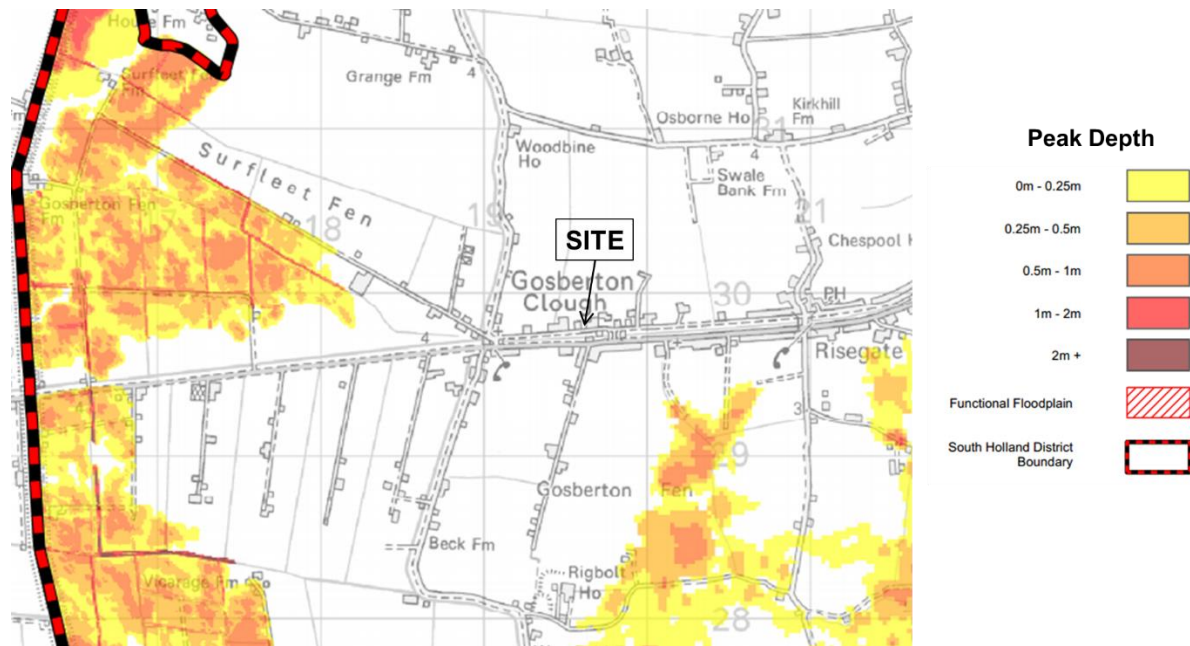

The risk of water levels in IDB systems rising to a level above 3.00m OD in a 1 in 100 year event in 2115 can be considered to be unlikely.

As the development is in flood zone 3 and there is no flood hazard the proposed development falls within the category “G7” as shown on the Standing Advice Matrix on the South East Lincolnshire website and no extra mitigation is recommended for this development.

Recommendations

In any area at risk of flooding, even though in this case the risk is extremely low, it is preferable that proposed buildings in a defended area should be of two story construction with all bedrooms at first floor level. This will provide a refuge for residents if the building were to become flooded and ensure there is no danger to residents when they are asleep.

The proposed building should have a ground floor level of 3.30m OD, which is at least 300mm above the existing ground levels on the site and approximately 600mm above the level of the fields west and north of the site.

The surface water from the roofs and hardstandings should be discharged into soakaways, these should be designed to conform with BRE Digest 365 and approved under the Building Regulations.

It is assumed the foul water from the site will be treated by a package treatment plant on the site and if possible the treated effluent should be discharged into the Risegate Eau south of the site, subject to the developer obtaining the consent of the Environment Agency and the Black sluice IDB.


Occupiers of the property should register to receive automatic telephone flood warnings from the Environment Agency's Floodline Warnings Direct Service.

S M HEMMINGS B Sc C Eng MICE MIWEM


stuart.hemmings@btinternet.com

12th December 2017

PLAN OF IDB DRAINS

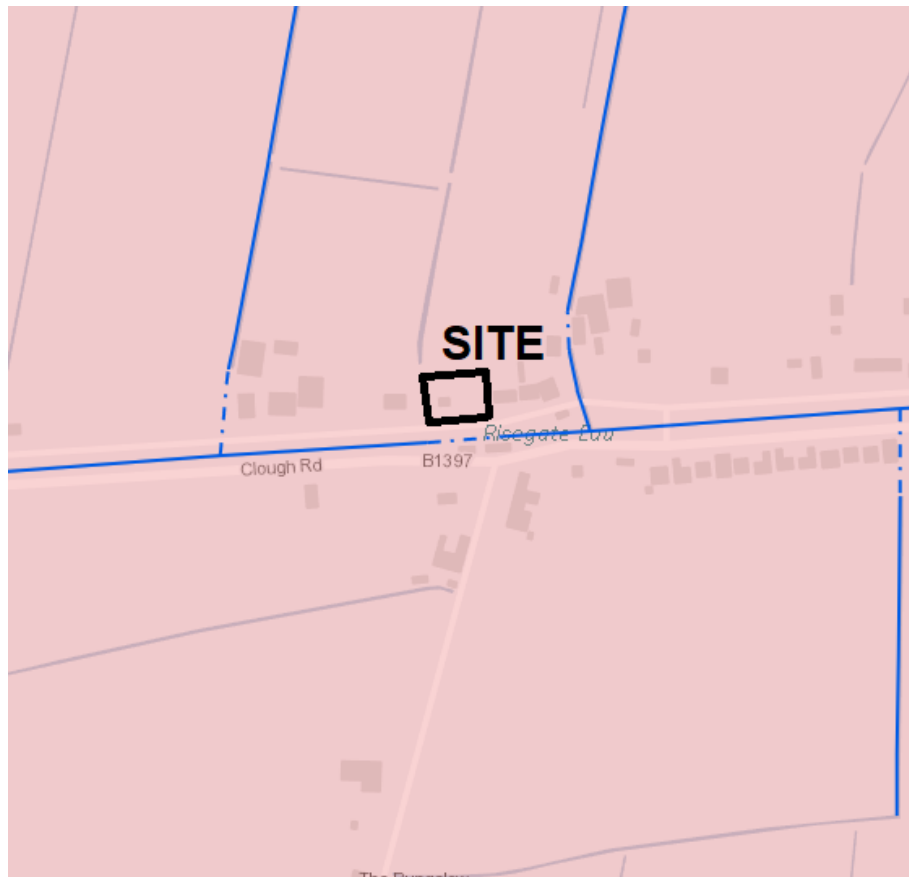

PLAN OF PROPOSED BUILDING ON THE SITE

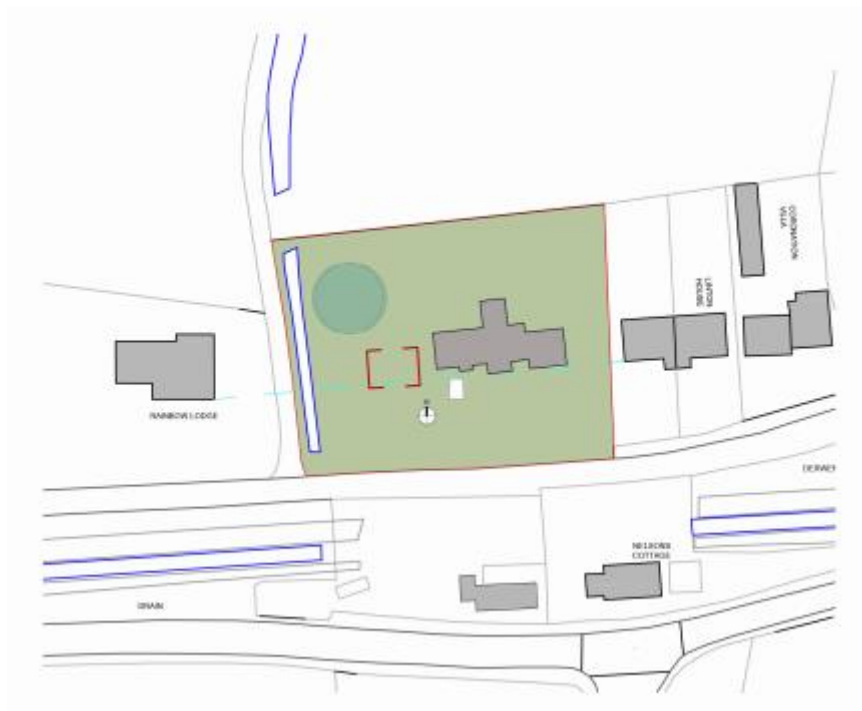

APPENDIX A CLIMATE CHANGE

The Environment Agency has issued revised guidance on climate change and have now stated that the new predictions should be considered and incorporated into all flood risk assessments produced after 19th February 2016.

Listed below are the climate change allowances in three documents:

- South Holland SFRA
- EA guidance (2013)
- Revised EA guidance

The recommendations in each document are shown below.

2010 South Holland DC SFRA

The SHDC SFRA states that the the following allowances have been made for climate change:

4.4 Climate Change

Scenarios for the years 2055 and 2115 include for climate change contingency allowances to the amount suggested by PPS25¹. These allowances are expressed in Table 2. Percentage increases are relative to the present-day.

Table 2 – Adopted Climate change contingency allowances

Parameter	Year 2055	Year 2115
Sea level rise (m)	+ 0.33	+ 1.14
Extreme wave height	+ 10%	+ 10%
Peak river flow and volume	+ 20%	+ 20%
Peak rainfall intensity	+ 20%	+30%

Where flows arise from pumping rather than natural run-off, notably in the Vernatt's Drain and for the Fenland subcatchments of the South Forty Foot Drain, peak flow rates for future eras have been taken as equal to current rates since this SFRA assumes all flood risk management measures will remain in their current state.

2013 Guidance to Planners

Guidance to planners was issued by EA in September 2013

Table 1: Recommended contingency allowances for net sea level rises (Net sea level rise (mm per year) relative to 1990)

	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
East of England, east midlands, London, south-east England (south of Flamborough Head)	4.0	8.5	12.0	15.0
South-west England	3.5	8.0	11.5	14.5
North-west England, north-east England (north of Flamborough Head)	2.5	7.0	10.0	13.0

Table 2: Recommended national precautionary sensitivity ranges for peak rainfall intensity, peak river flow, offshore wind speed and wave height

Parameter	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
Peak rainfall intensity	+5%	+10%	+20%	+30%
Peak river flow	+10%	+20%		
Offshore wind speed	+5%		+10%	
Extreme wave height	+5%		+10%	

Revised 2016 EA Guidance

Table 1 peak river flow allowances by river basin district (use 1961 to 1990 baseline)

River basin district	Allowance category	Total potential change anticipated for '2020s' (2015 to 39)	Total potential change anticipated for '2050s' (2040 to 2069)	Total potential change anticipated for '2080s' (2070 to 2115)
Anglian	Upper end	25%	35%	65%
	Higher central	15%	20%	35%
	Central	10%	15%	25%

For more vulnerable development in flood zone 3(a) the higher central and upper end should be used to assess the range of allowances.

Table 2 peak rainfall intensity allowance in small and urban catchments (use 1961 to 1990 baseline)

Applies across all of England	Total potential change anticipated for 2010 to 2039	Total potential change anticipated for 2040 to 2059	Total potential change anticipated for 2060 to 2115
Upper end	10%	20%	40%
Central	5%	10%	20%

Table 3 sea level allowance for each epoch in millimetres (mm) per year with cumulative sea level rise for each epoch in brackets (use 1990 baseline)

Area of England	1990 to 2025	2026 to 2050	2051 to 2080	2081 to 2115	Cumulative rise 1990 to 2115 / metres (m)
East, east midlands, London, south east	4 (140 mm)	8.5 (212.5 mm)	12 (360 mm)	15 (525 mm)	1.24 m

Table 4 offshore wind speed and extreme wave height allowance (use 1990 baseline)

Applies around all the English coast	1990 to 2050	2051 to 2115
Offshore wind speed allowance	+5%	+10%
Offshore wind speed sensitivity test	+10%	+10%
Extreme wave height allowance	+5%	+10%
Extreme wave height sensitivity test	+10%	+10%

Effects on Predictions of Flood Risk in FRA

The FRA has identified the three sources of flooding where the new climate change recommendations could affect the predictions of flood levels in 2115 at the development site. These are flooding from the River Glen, from the South Forty Foot Drain, and from IDB drainage systems.

Fluvial Flooding from River Glen.

As the development is in flood zone 3 and is classed as more vulnerable, the upper end climate change allowance, which is 35%, should first be considered. After considering the effects of this increase the upper end allowance, which is 65%, should be considered to assess the effect of this.

The EA have been using an allowance of 20% for climate change over the past few years in their assessments and modelling of their systems. The SHDC SFRA also has used this figure of 20%. The increase to 35% will not significantly change the conclusion in the SFRA of what might happen if a breach occurred in the bank of the River Glen. If there are additional flows along this part of the River Glen it will lead to

additional flooding in the upper reaches of the River system rather than significantly increasing water levels in the River Glen.

The upper end allowance predicting a 65% increase in flows above the 1 in 100 year predicted flows now needs to be considered. The River Glen is an embanked watercourse along the section between Pinchbeck and Bourne. The increases in rainfall leading to this would lead to significant flooding in the upper part of the River Glen Catchment. It is unlikely that there will be any significant increase in the water level in the River. Therefore the consequence will not be significantly different to the maps produced in the SFRA.

Fluvial Flooding from South Forty Foot Drain.

As the development is in flood zone 3 and is classed as more vulnerable, the upper end climate change allowance, which is 35%, should first be considered. After considering the effects of this increase the upper end allowance, which is 65%, should be considered to assess the effect of this.

The EA have been using an allowance of 20% for climate change over the past few years in their assessments and modelling of their systems. The SHDC SFRA also has used this figure of 20%. The increases to 35% and 65% will not significantly change the conclusion in this report. Any increase in flows in the Black Sluice Catchment would not lead to the water level in the South Forty Foot Drain rising significantly. It would lead to significant flooding in the catchment west of the South Forty Foot Drain.

Flooding from IDB drainage system

As the development is in flood zone 3 and is classed as more vulnerable, the advice from the Environment Agency is that the higher central climate change allowance, which is 35%, should be considered. After considering the effects of this increase the upper end allowance, which is 65%, should be considered to assess the effect of this.

IDB's have been using an allowance of 20% for climate change over the past few years in their assessments and modelling of their systems. Generally IDB's are happy that their systems provide a 1 in 100 year standard to most urban areas at the present time.

Black Sluice IDB, and all IDB's, are aware that climate change will affect the operations of pumping stations, sluices and drainage channels. Pumping stations and sluices only have a 30 year life and will need to be refurbished or rebuilt within this timespan. It is assumed that Black Sluice IDB will continue to review the modelling they have already carried out and when the Board consider these refurbishments adequate arrangements will be made to incorporate the latest climate change projections in order that the Board continues to provide the same standard of service as the present day.

Therefore it is considered that the mitigation proposed for the development, with the recommendation that the floor levels should be a minimum level of 3.30m OD, is satisfactory.